



# CHENMKO ENTERPRISE CO.,LTD

## SURFACE MOUNT GLASS PASSIVATED SUPER FAST SILICON RECTIFIER

VOLTAGE RANGE 50 - 600 Volts CURRENT 8.0 Amperes

Lead free devices

**UPL81PT  
THRU  
UPL86PT**



PROVISIONAL SPEC.

### FEATURE

- \*Small Surface Mounting Type. (SMP)
- \* Low forward voltage, high current capability
- \* Low leakage current
- \* Glass passivated junction
- \* High temperature soldering guaranteed :  
260°C/10 seconds at terminals

SMP

### CIRCUIT

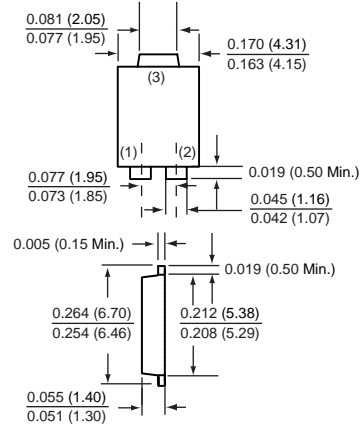

SMP

### MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )

RATINGS	SYMBOL	UPL81PT	UPL82PT	UPL83PT	UPL84PT	UPL85PT	UPL86PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	300	400	600	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current T <sub>L</sub> = 90°C	I <sub>O</sub>	8.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	120						Amps
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	50				30		pF
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150						°C

### ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )


CHARACTERISTICS	SYMBOL	UPL81PT	UPL82PT	UPL83PT	UPL84PT	UPL85PT	UPL86PT	UNITS
Maximum Instantaneous Forward Voltage at 8.0 A DC	V <sub>F</sub>	0.95			1.30	1.50		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ TA = 25°C	10						uAmps
	@ TA = 100°C	500						uAmps
Maximum Reverse Recovery Time (Note 2)	t <sub>rr</sub>	35				50		nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts  
2. Test Conditions : I<sub>F</sub> = 0.5 A, I<sub>R</sub> = -1.0 A, I<sub>RR</sub> = -0.25 A

2004-7

# RATING CHARACTERISTIC CURVES ( UPL81PT THRU UPL86PT )

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

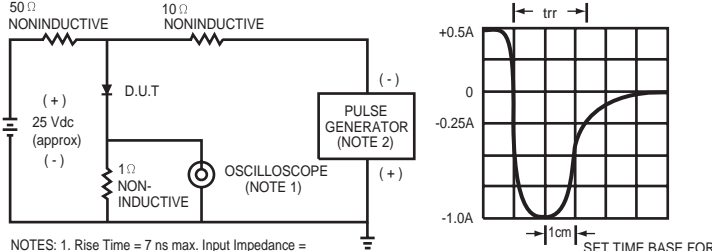

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm. 22 pF.  
2. Rise Time = 10 ns max. Source Impedance = 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

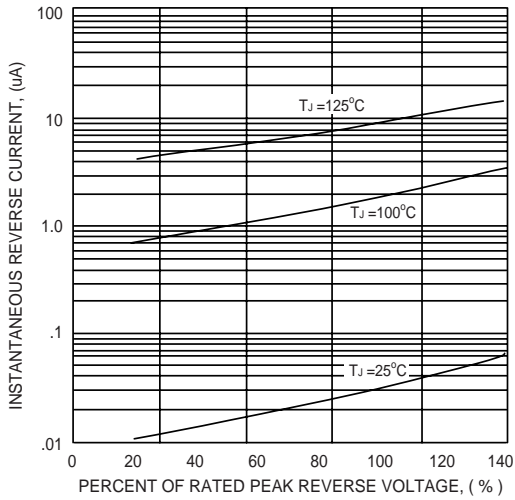


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

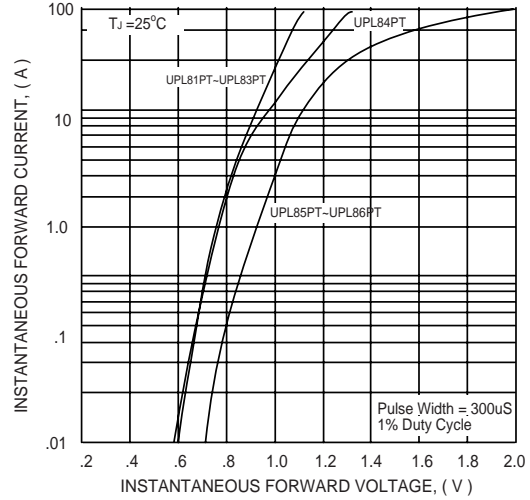


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

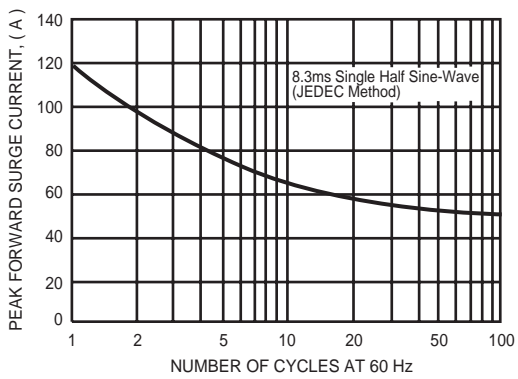


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

