

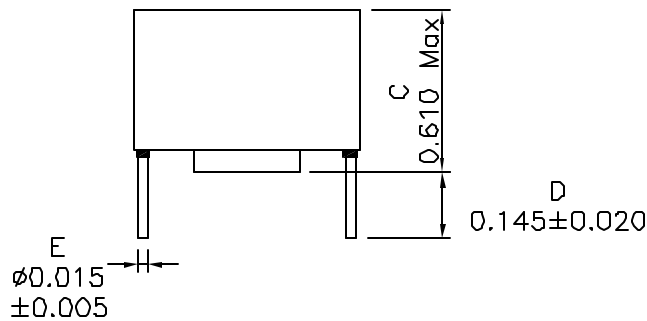


1. Mechanical Dimensions:

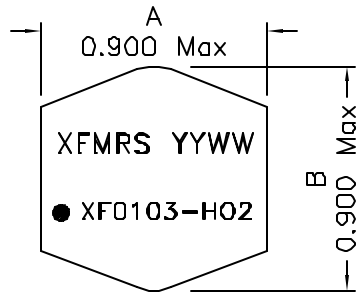


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/1

2. Schematic:

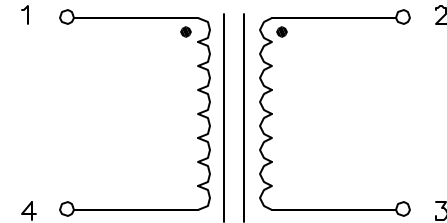

3. Electrical Specifications: @25°C

Inductance: 10mH±30% @100KHz 0.1V, Each Wdg

DC Resistance: 0.70 Ohms Max, Each Wdg

Current Rating: 0.70 Arms

SRF: 350KHz Min

Isolation Voltage: 2500Vrms, Wdg to Wdg

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.030 Dimensions in INCH	P/N: XF0103-H02	REV. A
SHEET 1 OF 1	DWN.	Juan Mao	Jul-06-06
	CHK.	YK Liao	Jul-06-06
	APP.	BW	Jul-06-06