



1. Dimensions:

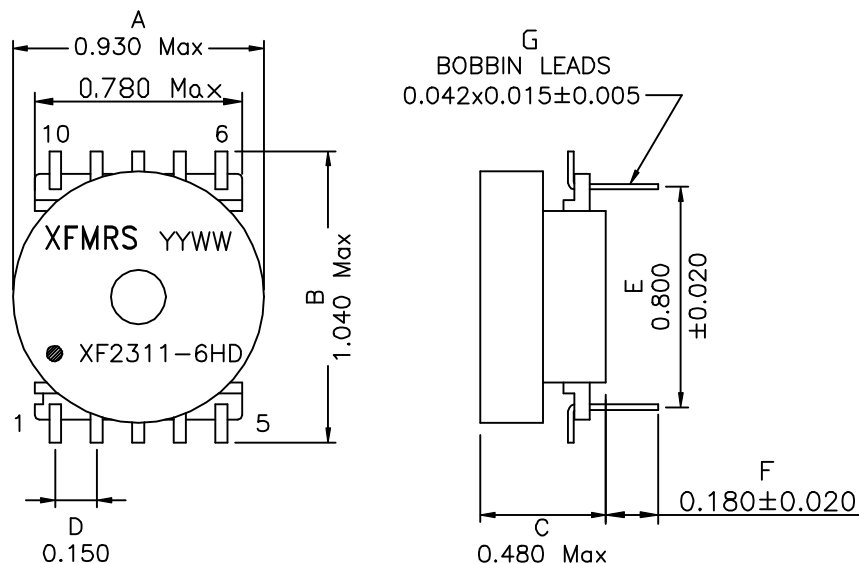

2.Schematic:



3.Electrical Specifications: @25°C

ISOLATION VOLTAGE: 1500Vrms
 TURNS RATIO: (2-3-4):(7-6):(10-9)=1CT:0.9:0.9 ±2%
 PIN6-10 Inductance: 2.06mH ±10% @10KHz 1.0V
 (CONNECT PIN7-9)
 DC CURRENT CAPABILITY: 75mA
 DCR: 2.0 ohms Max. (6-7), (9-10)
 2.0 ohms Max. (2-4)
 RETURN LOSS: 16.5dB Min. @40-320KHz
 Longitudinal Balance (135 ohms): 50dB Min @5-292KHz
 THD: 75dB Typ. @5KHz 6vp-p 135 ohms

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV A/5

XFMRS Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH SHEET 1 OF 1	Title: HDSL TRANSFORMER		
	P/N: XF2311-6HD	REV. A	
	DWN.	廖玉坤	Dec-03-01
	CHK.	李清儿	Dec-03-01
APP.	Joe Huff	Dec-03-01	