



Approved by:

Checked by:

Issued by:

# SPECIFICATION

PRODUCT: SAW FILTER


MODEL: HB3611D (X6865D) SIP5D

**HOPE MICROELECTRONICS CO.,LIMITED**


## 1. Construction

### 1.1 Dimension and materials

Type : B3611D

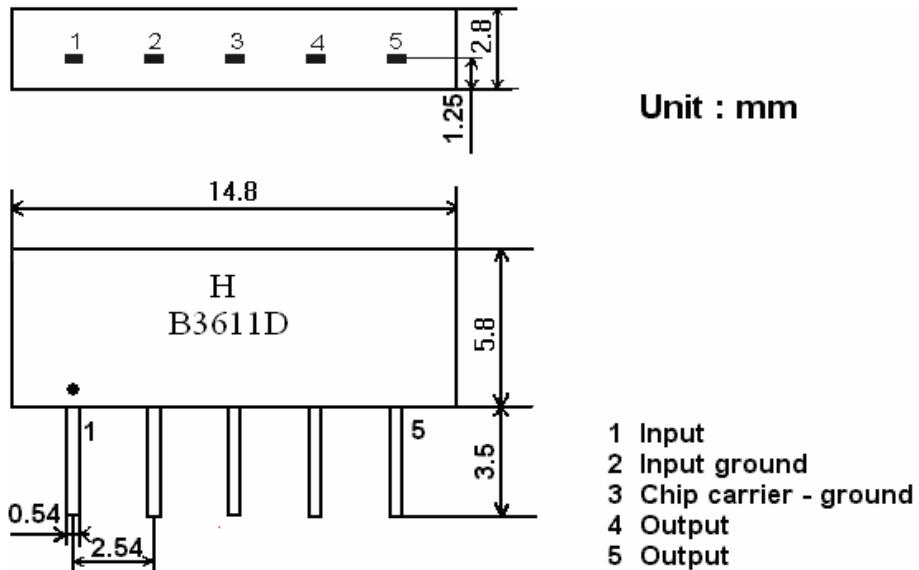

### 1.2. Circuit construction, measurement circuit

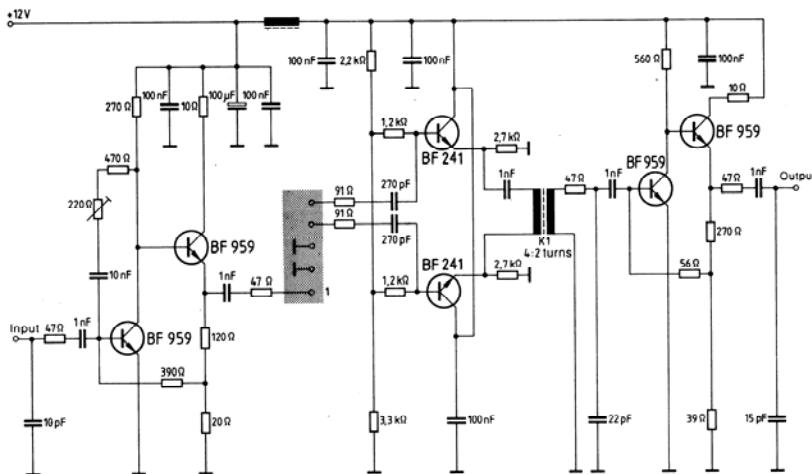

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier:  $2\text{ k}\Omega$  in parallel with  $3\text{ pF}$

## 2. Characteristics

### Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature :  $15^\circ\text{C}$  to  $35^\circ\text{C}$

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

### Operating temperature rang

Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously.  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

### Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications.  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

**Reference temperature**  $+25^{\circ}\text{C}$

## 2.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>

## 2.2 Electrical Characteristics

Source impedance  $Z_s=50\ \Omega$

Load impedance  $Z_L=2k\ \Omega // 3pF$   $T_A=25^{\circ}\text{C}$

Item	Freq	min	typ	max	
<b>Center frequency</b>	<b>F<sub>o</sub></b>	-	36.125	-	MHz
<b>Insertion attenuation</b> Reference level	36.13MHz	15.8	17.6	19.4	dB
<b>Pass bandwidth</b>	B <sub>3dB</sub>	5.8	6.0	6.2	MHz
	B <sub>30dB</sub>	7.4	7.6	7.8	MHz
<b>Relative attenuation</b>	33.59MHz	-1.3	0.1	1.5	dB
	38.65MHz	-1.0	0.4	1.8	dB
	33.12MHz	1.0	2.5	4.0	dB
	39.12MHz	1.6	3.1	4.6	dB
<b>Sidelobe</b>	25.00~32.12MHz	34.0	41.0	-	dB
	40.12~41.42MHz	32.0	39.0	-	dB
	41.42~45.00MHz	34.0	42.0	-	dB
<b>Reflected wave signal suppression</b> 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 36.13 MHz)		42.0	52.0		dB
<b>Feedthrough signal suppression</b> 1.3 us ... 1.2 us before main pulse (test pulse 250 ns , carrier frequency 36.13 MHz)		45.0	54.0		dB
<b>Group delay ripple (p-p)</b> 33.12 ~ 39.12 MHz	-	50	-	ns	
<b>Impedance at 36.13 Mhz</b> Input: $Z_{in} = R_{in} // C_{in}$ Output: $Z_{in} = R_{in} // C_{in}$	-	-	2.2//15.3 1.4//5.6	-	k $\Omega // pF$ k $\Omega // pF$
<b>Temperature coefficient of frequency</b>		-72		ppm/k	

### 2.3 Environmental Performance Characteristics


Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Solder temp. 260°C for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More than 95% of total area of the pins should be covered with solder

### 2.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weight 2 times	<1.0


### 2.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0



## 2.6 Frequency response:

►1:Transmission Log Mag 10.0 dB/  
►2:Off

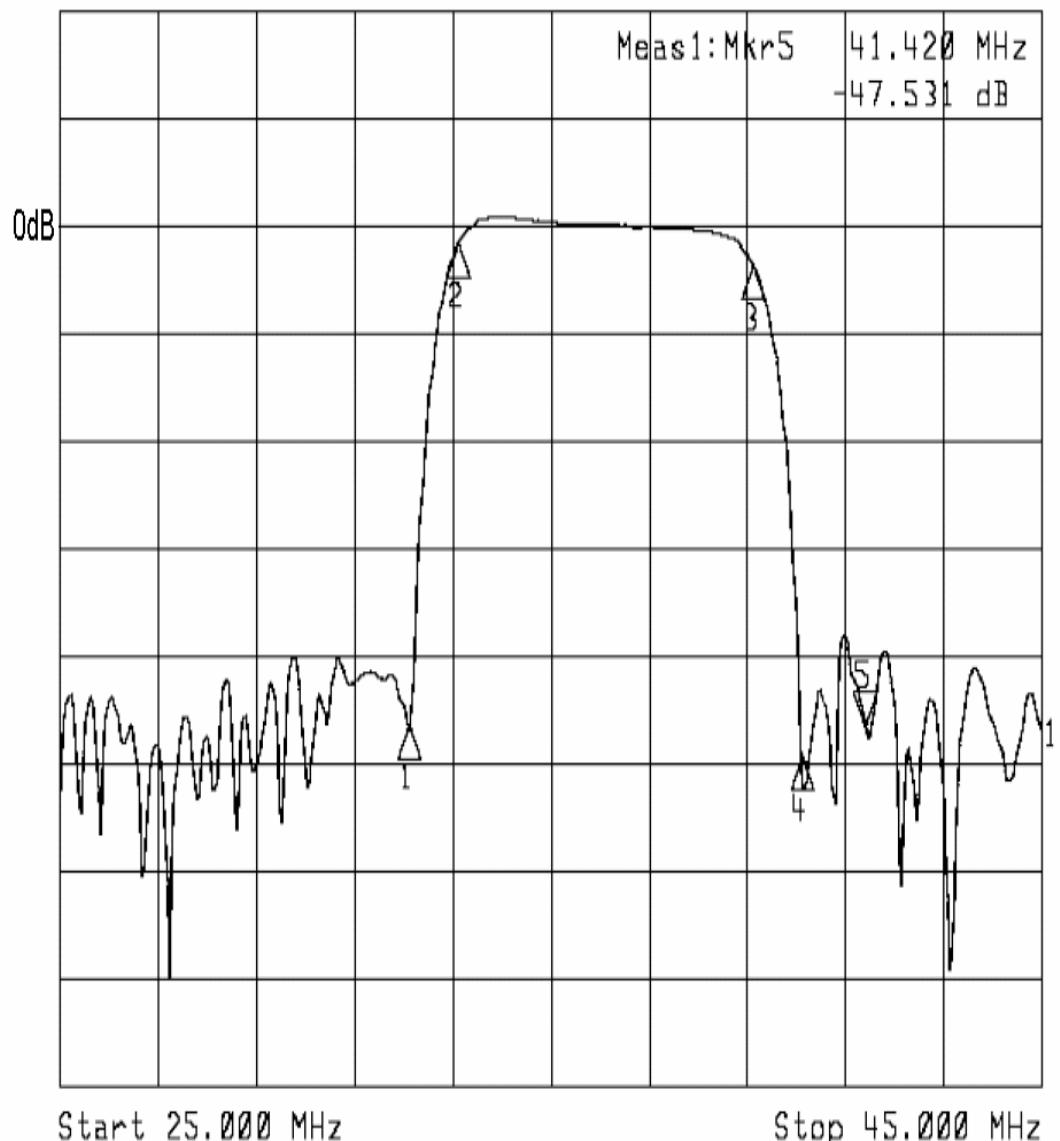

1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1: 32.12	-47.338		
2: 33.12	-2.694		
3: 39.12	-3.572		
4: 40.12	-50.451		
5: 41.42	-47.531		

