



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

MECHANICAL DIMENSIONS:

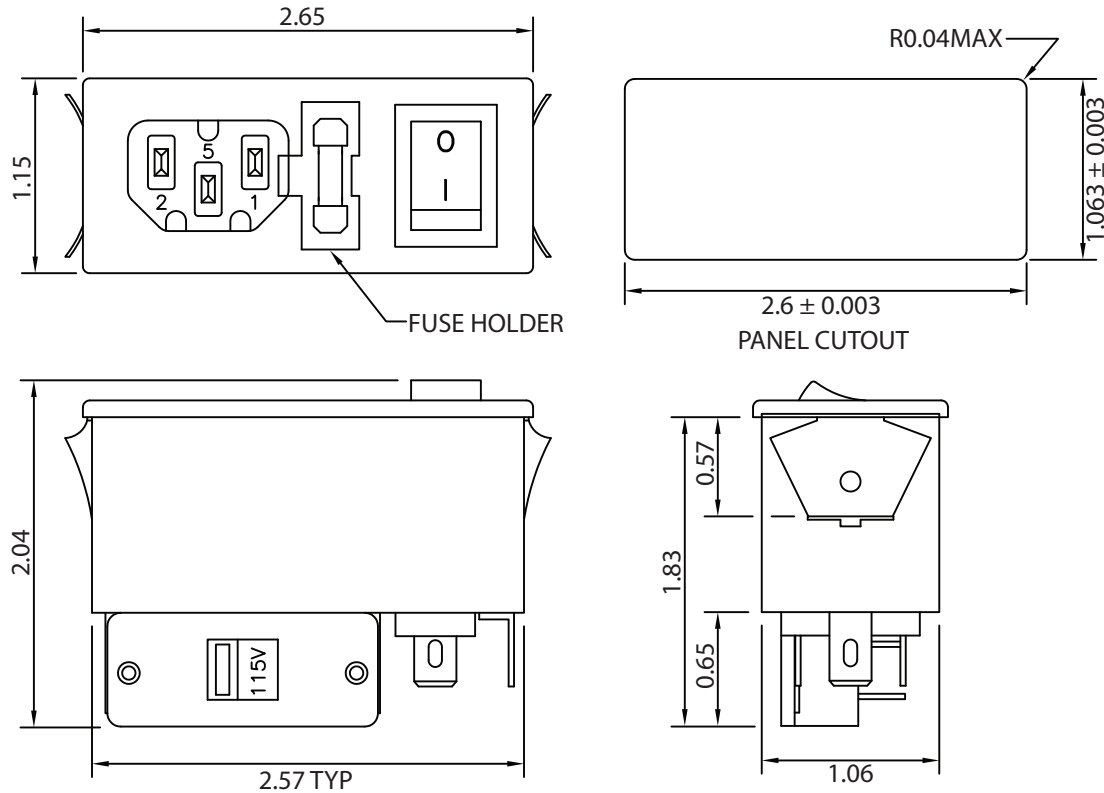

ELECTRICAL SCHEMATIC:

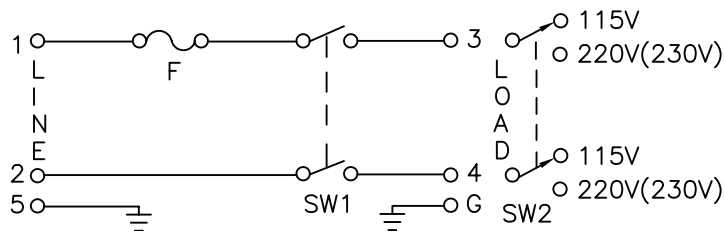

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	01-24-08	DP
D	Graphics and Notes Update	07-09-08	DP

ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING.....115/250VAC
- 1-2. CURRENT RATING
  - A. @ 115 VAC/250 VAC (UL,CSA).....6A RMS MAX
  - B. @ 250 VAC (SEMKO) .....6A RMS MAX
- 1-3. DPST POWER SWITCH
  - A. @ 250V AC (VDE)..... 6A RMS MAX
- 1-4. OPERATING FREQUENCY ..... 48-440Hz
- 1-5. HIPOT RATING (FOR ONE MINUTE)
  - A. LINE TO GROUND..... 2000VAC
  - B. LINE TO LINE.....2000VAC
- 1-6. MINIMUM INSERTION RESISTANCE (FOR ONE MINUTE AT 500VDC)
  - A. LINE & NEUTRAL TO GROUND..... 10M OHM
  - B. LINE TO NEUTRAL.....10M OHM
- 1-7. SINGLE 5X20mm FUSEHOLDER
- 1-8. .250 FASTON TERMINALS
- 1-9. FLAMMABILITY CLASS UL94V-0
- 1-10. METAL CASE
- 1-11. SNAP-IN MOUNT FOR PANEL THICKNESS 1.0-1.8mm (.04"- .07")
- 1-12. APPROVALS: UL, CSA, SEMKO
- 1-13. RoHS COMPLIANT

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 762-18/005 <span style="border: 1px solid green; padding: 2px;">RoHS Compliant</span>		
0-1	0.15	Description: <b>MULTI-FUNCTION MODULE</b>		
1-6	0.20			
6-18	0.30		UNIT: in	REV. D
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	S.Tsai 05-04-01	05-04-01	JJH / 05-04-01
250-500	1.20			