

TS13E CD137


FEATURES

- Development specially for the demand of higher voltage with compact size.
- 500V and 550V added in the series.
- Warranty of 5000 hours at 85°C

◆ Specifications

I T E M S S P E C I F I C A T I O N S									
Rated Voltage Range(V)	400, 450, 500V, 550V								
Operating Temperature Range(°C)	-40°C~+85°C								
Capacitance Tolerance(20°C,120Hz)	±20%								
Dissipation Factor(20°C,120Hz)	400, 450V.DC : 0.15 500, 550V.DC : 0.20								
Leakage current(μA)	0.01CV or 5mA, whichever is smaller. (at 20°C, after 5 minutes) C:Nominal capacitance (μF) V:Rated voltage(V)								
Load Life (+85°C)	<table border="1"> <tr> <td>Time</td> <td>5000 hours</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> <tr> <td>Capacitance Change</td> <td>Within±15% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 175% of the specified value.</td> </tr> </table>	Time	5000 hours	Leakage Current	Not more than the specified value.	Capacitance Change	Within±15% of the initial value	Dissipation Factor	Not more than 175% of the specified value.
	Time	5000 hours							
	Leakage Current	Not more than the specified value.							
	Capacitance Change	Within±15% of the initial value							
Dissipation Factor	Not more than 175% of the specified value.								
Shelf Life (+85°C)	<table border="1"> <tr> <td>Time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±15% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 175% of the specified value.</td> </tr> </table>	Time	1000 hours	Leakage Current	Not more than the specified value.	Capacitance Change	Within ±15% of the initial value	Dissipation Factor	Not more than 175% of the specified value.
	Time	1000 hours							
	Leakage Current	Not more than the specified value.							
	Capacitance Change	Within ±15% of the initial value							
Dissipation Factor	Not more than 175% of the specified value.								
After Test: U _R to be applied for 30 minutes, 12 to 24 hours before measurement									

◆ Dimensions

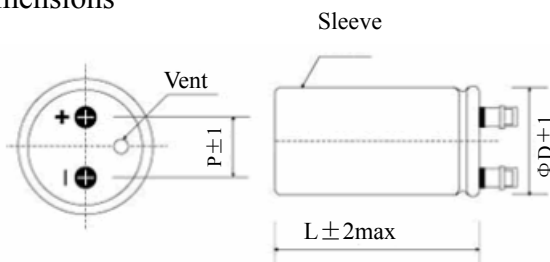

ΦD	51	64	77	90	101
P	22	28.6	32	32	41.5

◆ Multiplier for ripple current

Frequency coefficient

Frequency(Hz)	50,60	120	300	1K	≥10K
Factor	0.7	1.0	1.1	1.3	1.40

Temperature coefficient

Temperature(°C)	+40	+60	+85
Factor	1.89	1.67	1.00

TS13E CD137

■ STANDARD RATINGS

Rated Voltage (V.DC)	Surge Voltage (V.DC)	Rated Capacitance (μ F)	Leakage Current Max (mA)	Dissipation Factor Max	Ripple Current 85°C 120Hz (Arms)	Outline Size	
						Code	DxL (mm)
400	450	2200	5.0	0.15	8.8	C12R	561x115
		2700	5.0	0.15	10.2	C13R	51x130
		3300	5.0	0.15	11.0	D10R	64x96
		3900	5.0	0.15	12.8	D12R	64x115
		4700	5.0	0.15	14.8	D13R	64x130
		5600	5.0	0.15	16.2	E12R	77x115
		6800	5.0	0.15	18.7	E13R	77x130
		8200	5.0	0.15	22.0	E16R	77x155
		10000	5.0	0.15	26.7	E20R	77x195
			5.0	0.15	24.2	F13R	90x131
		12000	5.0	0.15	28.5	F16R	90x157
		15000	5.0	0.15	34.8	F20R	90x196
		18000	5.0	0.15	41.2	F24R	90x236
		22000	5.0	0.15	47.0	G24R	101x237
450	500	1800	5.0	0.15	7.6	C12R	51x115
		2200	5.0	0.15	8.8	C13R	51x130
		2700	5.0	0.15	9.5	D10R	64x96
		3300	5.0	0.15	11.2	D12R	64x115
		3900	5.0	0.15	12.8	D13R	64x130
		4700	5.0	0.15	14.1	E12R	77x115
		5600	5.0	0.15	16.2	E13R	77x130
		6800	5.0	0.15	19.1	E16R	77x155
		8200	5.0	0.15	23.0	E20R	77x195
			5.0	0.15	21.0	F13R	90x131
		10000	5.0	0.15	25.7	F17R	90x171
		12000	5.0	0.15	29.7	F20R	90x196
			5.0	0.15	29.3	G18R	101x175
		15000	5.0	0.15	35.9	F24R	90x236
			5.0	0.15	34.2	G20R	101x195
		18000	5.0	0.15	40.5	G24R	101x237
500	550	1200	5.0	0.20	6.2	C12R	51x115
			5.0	0.20	6.3	D10R	64x96
		1500	5.0	0.20	7.3	C13R	51x130
			5.0	0.20	7.1	D10R	64x96
		1800	5.0	0.20	8.3	D12R	64x115
		2200	5.0	0.20	9.6	D13R	64x130
		2700	5.0	0.20	10.7	E12R	77x115
		3300	5.0	0.20	12.4	E13R	77x130
		3900	5.0	0.20	14.4	E16R	77x155
		4700	5.0	0.20	16.5	E17R	77x171
			5.0	0.20	15.8	F13R	90x131
		5600	5.0	0.20	19.0	E20R	77x195
			5.0	0.20	18.6	F16R	90x157
		6800	5.0	0.20	21.2	F17R	90x171
		8200	5.0	0.20	24.5	F20R	90x196
			5.0	0.20	24.2	G18R	101x175
		10000	5.0	0.20	29.3	F24R	90x236
			5.0	0.20	27.9	G20R	101x195
12000	5.0	0.20	33.1	G24R	101x237		
550	600	1000	5.0	0.20	5.9	C13R	51x130
		1200	5.0	0.20	6.8	D12R	64x115
		1500	5.0	0.20	8.0	D13R	64x130
		1800	5.0	0.20	8.7	E12R	77x115
		2200	5.0	0.20	10.1	E13R	77x130
		2700	5.0	0.20	12.0	E16R	77x155
		3300	5.0	0.20	13.3	E16R	77x155
		3900	5.0	0.20	15.5	F16R	90x157
		4700	5.0	0.20	17.6	F17R	90x171
		5600	5.0	0.20	20.3	F20R	90x196
		6800	5.0	0.20	24.1	F24R	90x236
		8200	5.0	0.20	27.3	G24R	101x237

Note: Specification are subject to change without notice. For more detail and update, please visit our website.