


200 V - 1,000 V Single Phase Bridge

1.4 A - 1.5 A Forward Current
70 ns - 3000 ns Recovery Time

1102A - 1110A
1102FA - 1110FA
1102UFA - 1110UFA




ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rwm})	Average Rectified Current @TC (I _o)		Reverse Current @ V _{rwm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current Current tp=8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Thermal Impd. θ _{J-C}
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C/W
1102A 1106A 1110A	200 600 1000	1.5 1.5 1.5	1.0 1.0 1.0	1.0 1.0 1.0	25 25 25	1.1 1.1 1.1	1.0 1.0 1.0	50 50 50	10 10 10	3000 3000 3000	22.5 22.5 22.5
1102FA 1106FA 1110FA	200 600 1000	1.5 1.5 1.5	1.0 1.0 1.0	1.0 1.0 1.0	25 25 25	1.3 1.3 1.3	1.0 1.0 1.0	25 25 25	6.0 6.0 6.0	150 150 150	22.5 22.5 22.5
1102UFA 1106UFA 1110UFA	200 600 1000	1.4 1.4 1.4	0.9 0.9 0.9	1.0 1.0 1.0	25 25 25	1.7 1.7 1.7	1.0 1.0 1.0	25 25 25	5.0 5.0 5.0	70 70 70	22.5 22.5 22.5

(1)T_{rr} Testing: I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

10

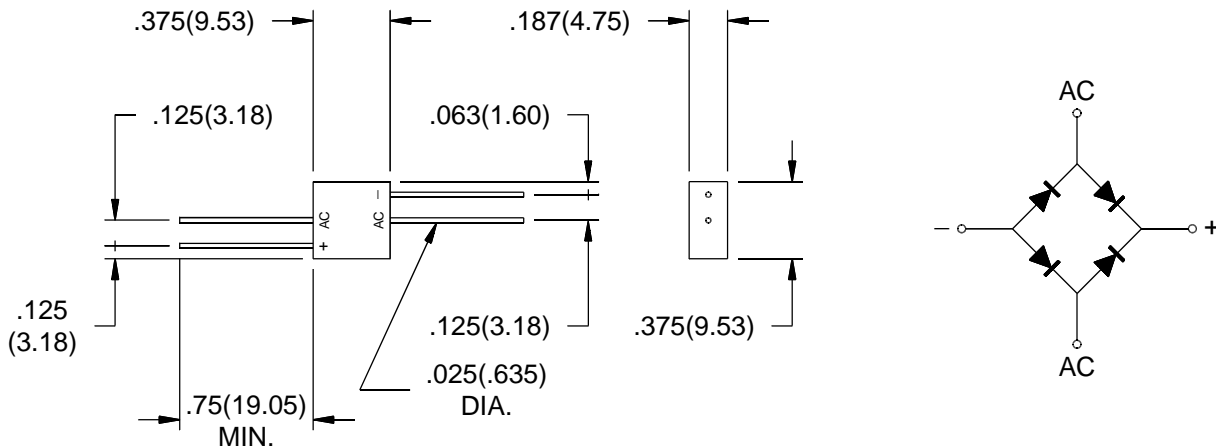

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

1102A - 1110A • 1102FA - 1110FA • 1102UFA - 1110UFA

