



SB2060LFCT

DUAL LOW VF SCHOTTKY RECTIFIER

VOLTAGE **60 Volts** **CURRENT** **20 Amperes**

FEATURES


- Low forward voltage drop, low power losses
 - High efficiency operation
 - In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case : ITO-220AB, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight: 0.055 ounces, 1.5615 grams

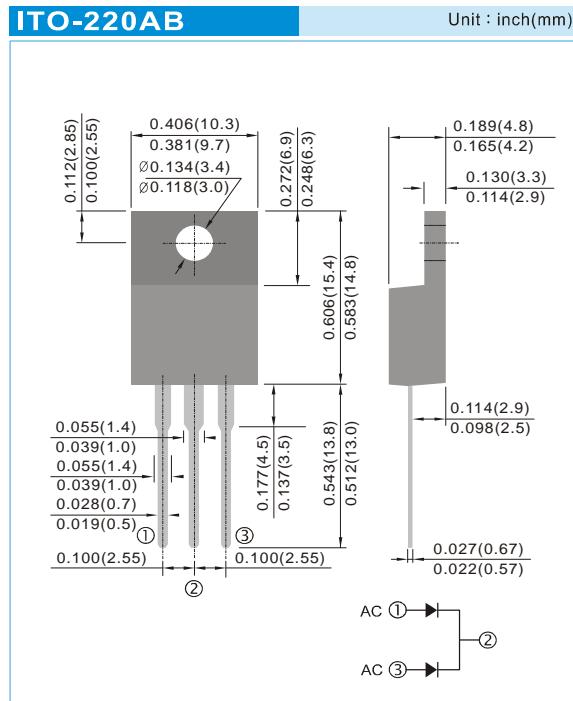

MAXIMUM RATINGS($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	60	V
Maximum average forward rectified current (Fig.4)	per device per diode	I _{F(AV)} 20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	per diode	I _{FSM} 145	A
Typical thermal resistance	R _{OJC}	4.5	°C / W
Operating junction	T _J	-55 to + 125	°C
Storage temperature range	T _{TSG}	-55 to + 150	°C

ELECTRICAL CHARACTERISTICS($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V_{BR}	$I_R=1\text{mA}$	64	68	-	V
Instantaneous forward voltage per diode ⁽¹⁾	V_F	$I_F=5\text{A}$ $I_F=10\text{A}$	$T_J=25^\circ\text{C}$	- -	0.44 0.51	0.51 0.60
		$I_F=5\text{A}$ $I_F=10\text{A}$	$T_J=125^\circ\text{C}$	- -	- -	0.44 0.56
Reverse current per diode ⁽²⁾	I_R	$V_R=60\text{V}$	$T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	- -	- -	0.5 20

Note.1.Pulse test : 380μs pulse width, 1% duty cycle

2.Pulse test : Pulse width < 2.5ms



SB2060LFCT

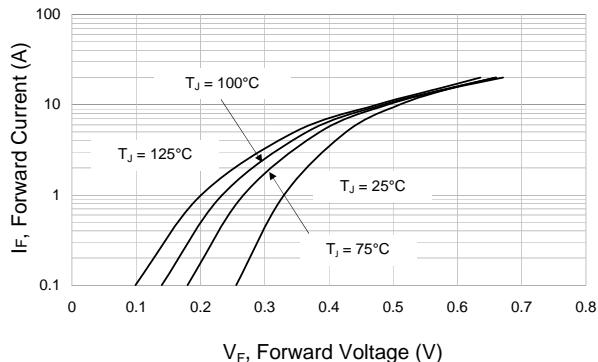


Fig.1 Typical Forward Characteristics Per Diode

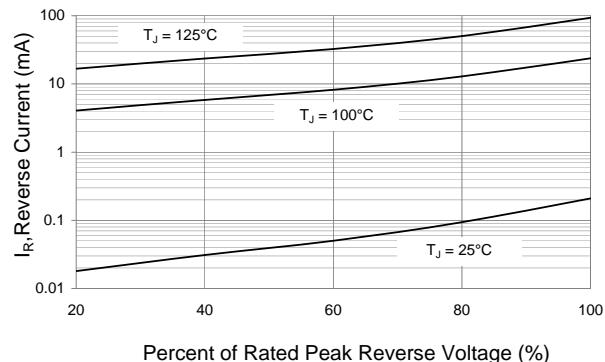


Fig.2 Typical Reverse Characteristics Per Diode

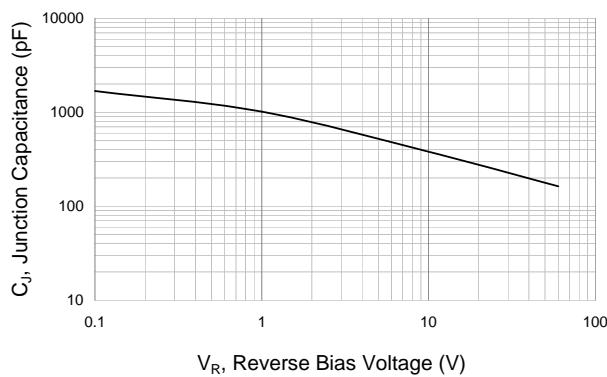


Fig.3 Typical Junction Capacitance Per Diode

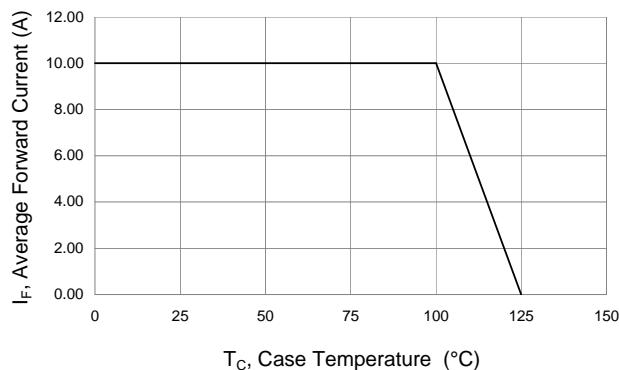


Fig.4 Forward Current Derating Curve Per Diode