



**CHENMKO ENTERPRISE CO.,LTD**

**SURFACE MOUNT**

**Dual N-Channel Enhancement Mode Field Effect Transistor**  
VOLTAGE 20 Volts CURRENT 9.5 Ampere

**CHM2108JPT**

*Lead free devices*

#### APPLICATION

- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.


#### FEATURE

- \* Small flat package. (SO-8 )
- \* High density cell design for extremely low R<sub>DS(ON)</sub>.
- \* Rugged and reliable.
- \* High saturation current capability.


#### CONSTRUCTION

- \* N-Channel Enhancement

#### CIRCUIT



**SO-8**

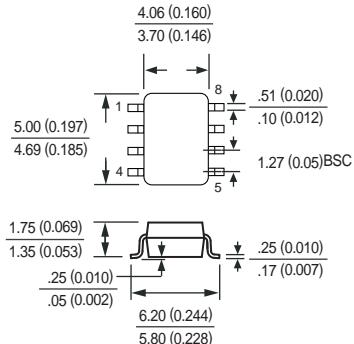

Dimensions in millimeters

**SO-8**

#### Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	CHM2108JPT	Units
V <sub>DSS</sub>	Drain-Source Voltage	20	V
V <sub>GSS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub>	Maximum Drain Current - Continuous	9.5	A
	- Pulsed (Note 3)	35	
P <sub>D</sub>	Maximum Power Dissipation	2000	mW
T <sub>J</sub>	Operating Temperature Range	-55 to 150	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to 150	°C

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

#### Thermal characteristics

R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient (Note 1)	62.5	°C/W
2005-02			

## RATING CHARACTERISTIC CURVES ( CHM2108JPT )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

### OFF CHARACTERISTICS

$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	20			V
$I_{DS(on)}$	Zero Gate Voltage Drain Current	$V_{DS} = 20 \text{ V}, V_{GS} = 0 \text{ V}$			1	$\mu\text{A}$
$I_{GSSF}$	Gate-Body Leakage	$V_{GS} = 12 \text{ V}, V_{DS} = 0 \text{ V}$			+100	nA
$I_{GSSR}$	Gate-Body Leakage	$V_{GS} = -12 \text{ V}, V_{DS} = 0 \text{ V}$			-100	nA

### ON CHARACTERISTICS (Note 2)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	0.6		1.3	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=4.5 \text{ V}, I_D=10 \text{ A}$		11	14	$\text{m}\Omega$
		$V_{GS}=2.5 \text{ V}, I_D=8 \text{ A}$		14	20	
$g_{FS}$	Forward Transconductance	$V_{DS} = 10 \text{ V}, I_D = 10 \text{ A}$		16		S

### Dynamic Characteristics

$C_{iss}$	Input Capacitance	$V_{DS} = 10 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$		2800		pF
$C_{oss}$	Output Capacitance			520		
$C_{rss}$	Reverse Transfer Capacitance			380		

### SWITCHING CHARACTERISTICS (Note 4)

$Q_g$	Total Gate Charge	$V_{DS}=15 \text{ V}, I_D=10 \text{ A}$ $V_{GS}=5 \text{ V}$		31	40	nC
$Q_{gs}$	Gate-Source Charge			4.6		
$Q_{gd}$	Gate-Drain Charge			10		
$t_{on}$	Turn-On Time	$V_{DD}=10 \text{ V}$ $I_D = 1.0 \text{ A}, V_{GS} = 10 \text{ V}$ $R_{GEN} = 6 \Omega$		17	35	nS
$t_r$	Rise Time			16	33	
$t_{off}$	Turn-Off Time			68	140	
$t_f$	Fall Time			31	60	

### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

$I_s$	Drain-Source Diode Forward Current	(Note 1)			2.3	A
$V_{SD}$	Drain-Source Diode Forward Voltage	$I_s = 2.3 \text{ A}, V_{GS} = 0 \text{ V}$ (Note 2)			1.2	V

## RATING CHARACTERISTIC CURVES ( CHM4808JPT )

### Typical Electrical Characteristics

