



## SURFACE MOUNT HIGH VOLTAGE SWITCHING DIODE ARRAY

This device features two series-connected diode pairs which can be connected to form a full-wave bridge. It is housed in a very small SOT23-6L surface mount package.


### FEATURES

- High Reverse Voltage Rating
- Fast Switching Speed
- Low Capacitance
- In compliance with EU RoHS 2002/95/EC directives

### APPLICATIONS

- Power Supplies
- High Speed Rectification

Marking Code: B34

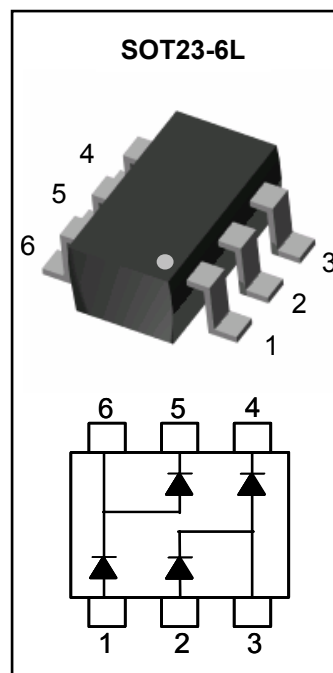

### MAXIMUM RATINGS (Per Diode) $T_J = 25^{\circ}\text{C}$ Unless otherwise noted

Rating	Symbol	Value	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$	350	V
Continuous Reverse Voltage	$V_R$	300	V
RMS Reverse Voltage	$V_{RMS}$	212	V
Continuous Forward Current (Note 1)	$I_F$	225	mA
Peak Repetitive Forward Current (Note 1)	$I_{FRM}$	625	mA
Non-repetitive Peak Forward Current, $t = 1\text{sec}$ , Square Wave	$I_{FSM}$	1.0	A
Total Power Dissipation (Note 1)	$P_{tot}$	350	mW
Operating Junction Temperature Range	$T_J$	-55 to +150	$^{\circ}\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^{\circ}\text{C}$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Units
Thermal Resistance, Junction to Ambient (Note 1)	$R_{thja}$	357	$^{\circ}\text{C}/\text{W}$


Note 1. FR-5 Board 1.0 x 0.75 x 0.062 in.




## ELECTRICAL CHARACTERISTICS (Per Diode) $T_j = 25^\circ\text{C}$ Unless otherwise noted

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Breakdown Voltage (Note 1)	$V_{BR}$	$I_{BR} = 150\mu\text{A}$	350	-	-	V
Forward Voltage (Note 1)	$V_F$	$I_F = 20\text{mA}$	-	0.82	0.87	V
		$I_F = 100\text{mA}$	-	0.95	1.0	
		$I_F = 200\text{mA}$	-	1.0	1.25	
Reverse Leakage Current (Note 1)	$I_R$	$V_R = 240\text{V}$ $V_R = 240\text{V} \quad T_j = 150^\circ\text{C}$	-	0.02 0.5	0.1 100	$\mu\text{A}$
Total Capacitance	$C_T$	0Vdc Bias, $f = 1\text{MHz}$	-	1.7	5.0	pF
Reverse Recovery Time	$t_{rr}$	$I_F = I_R = 30\text{mA}, I_{RR} = 3\text{mA}$ $R_L = 100\text{ohms}$	-	-	50	ns


Note 1. Short duration pulse test to avoid self-heating effect

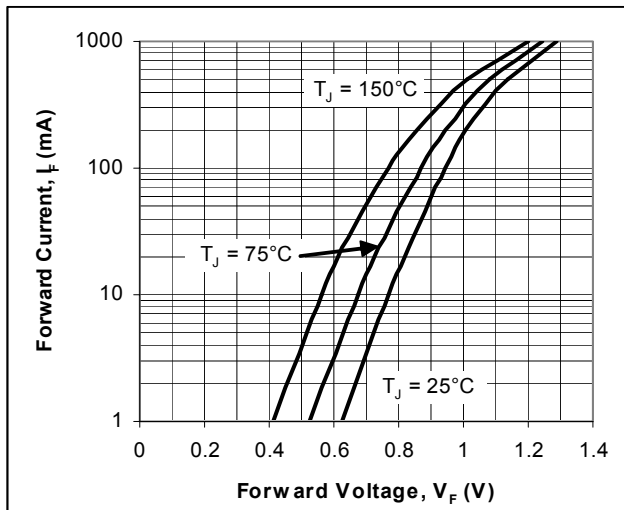

**Fig. 1. Typical Forward Characteristics**

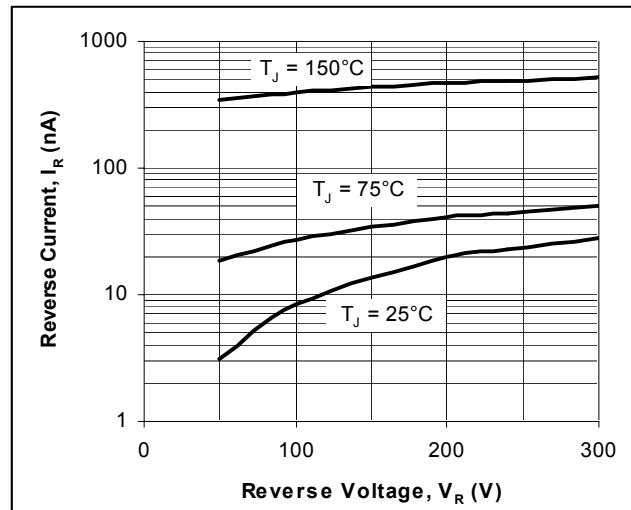



**Fig. 2. Typical Reverse Characteristics**

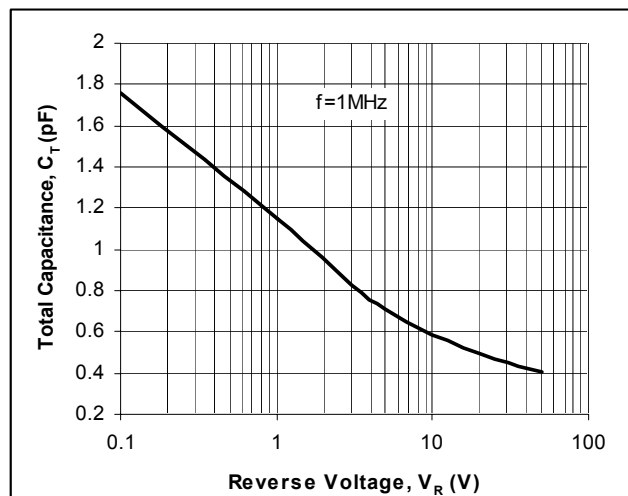

**Fig. 3. Typical Capacitance**



## PACKAGE LAYOUT AND SUGGESTED PAD DIMENSIONS

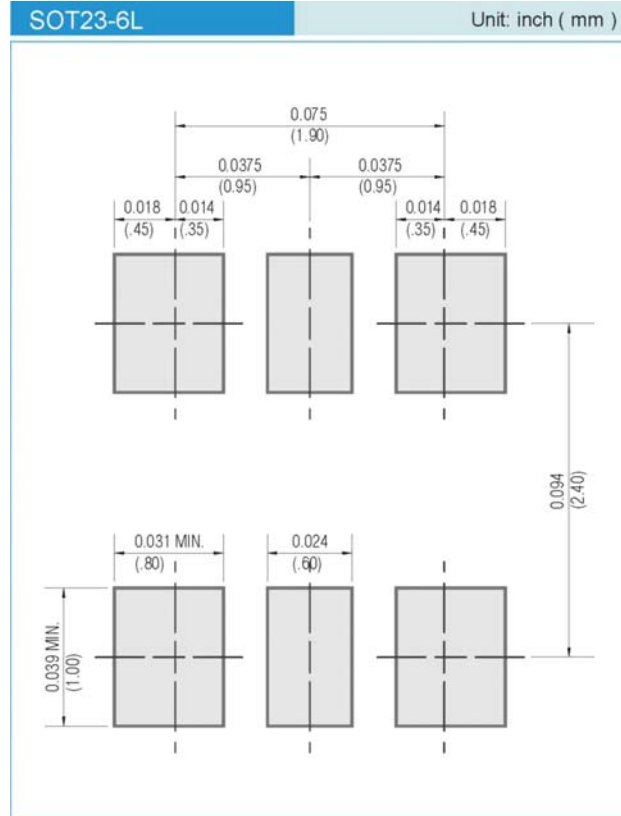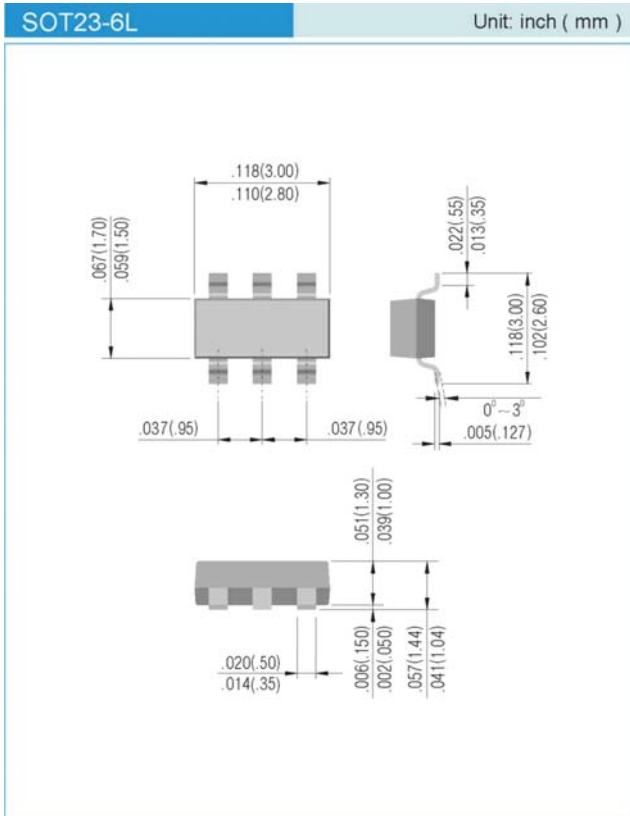

## ORDERING INFORMATION

- MMBD3004BRM T/R7 - 7" reel, 3K units per reel. Pin 1 towards tape sprocket holes
- MMBD3004BRM T/R7R - 7" reel, 3K units per reel. Pin 1 away from tape sprocket holes
- MMBD3004BRM T/R13 - 13" reel, 10K units per reel. Pin 1 towards tape sprocket holes
- MMBD3004BRM T/R13R - 13" reel, 10K units per reel. Pin 1 away from tape sprocket holes

## Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.