

2048 BIT BIPOLAR TTL

PROGRAMMABLE READ ONLY MEMORY


Description

The μPB412C and μPB412D are high speed, electrically programmable, fully decoded 2048 bit TTL read only memories. On-chip address decoding, one chip select input and three-state outputs allow easy expansion of memory capacity. The μPB412C and μPB412D are fabricated with logic level zero (low); logic level one (high) can be electrically programmed into the selected bit locations. The same address inputs are used for both programming and reading.

Features

- 512 WORDS x 4 BITS organization (Fully decoded)
- TTL Interface
- Fast read access time : 35 ns MAX. (μPB412-1)
- Medium power consumption : 400 mW TYP.
- One chip select input for memory expansion
- Three-state outputs
- Cerdip 16-Lead Dual In-Line Package (μPB412D)
- Plastic 16-Lead Dual In-Line Package (μPB412C)
- Fast Programming time : 200 μs/bit TYP.
- Replaceable with : MMI's 63S241, Harris' HM7621 and equivalent devices (as a ROM)

Connection Diagram (Top View)

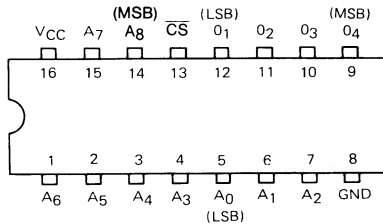

Pin names:

- A0 to A8 : Address Inputs
- 01 to 04 : Data Outputs
- CS : Chip Select Input
- VCC : Power Supply (+5V)
- GND : Ground

Operation


1. Programming

A logic one can be permanently programmed into a selected bit location by using special equipment (programmer). First the Chip Select input CS must be a logical one in order to disable the outputs. Second, the desired word is selected by the address inputs in TTL levels. Third, a train of high current programming pulses is applied to the desired output. After the sensed voltage indicates that the selected bit is in the logic one state, an additional pulse train is applied, then is stopped.

2. Reading

To read the memory, the Chip Select input should be held at logic zero (low). The outputs then correspond to the data programmed in the selected words. When the chip select input is at logic one (high), all the outputs will be high (floating).

Logic Diagram

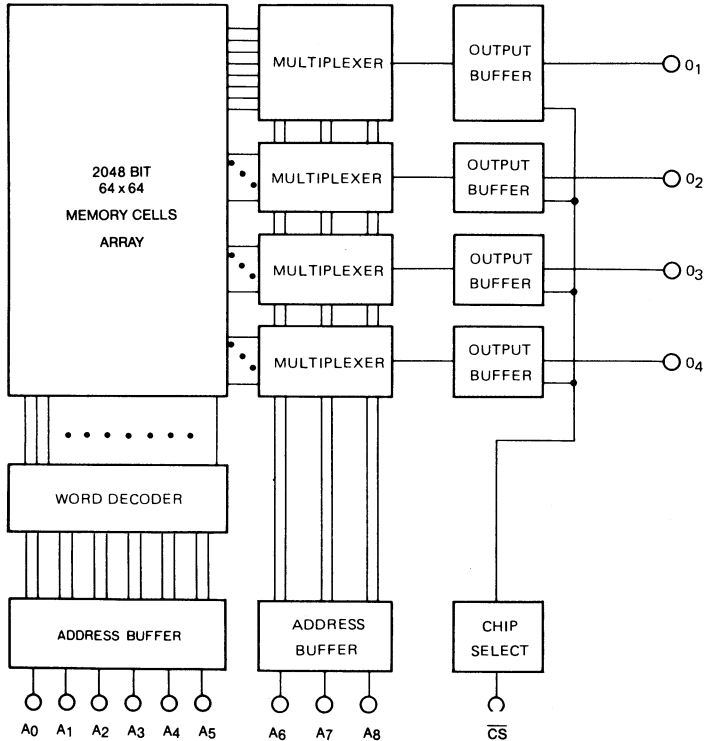

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	V_{CC}	-0.5 to +7.0	V
Input Voltage	V_I	-0.5 to +5.5	V
Output Voltage	V_O	-0.5 to +5.5	V
Output Current	I_O	50	mA
Operating Temperature	T_{opt}	-25 to +75	°C
Storage Temperature			
Cerdip Package	T_{stg}	-65 to +150	°C
Plastic Package	T_{stg}	-55 to +125	°C

D.C. CHARACTERISTICS ($V_{CC} = 4.5$ to 5.5 V, $T_a = 0$ to 75 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Input High Voltage	V_{IH}	2.0			V	
Input Low Voltage	V_{IL}			0.85	V	
Input High Current	I_{IH}			40	μA	$V_I = 5.5$ V $V_{CC} = 5.5$ V
Input Low Current	$-I_{IL}$			0.25	mA	$V_I = 0.4$ V $V_{CC} = 5.5$ V
Output Low Voltage	V_{OL}			0.45	V	$I_O = 16$ mA $V_{CC} = 4.5$ V
Output Leakage Current	I_{OFF1}			40	μA	$V_O = 5.5$ V $V_{CC} = 5.5$ V
Output Leakage Current	$-I_{OFF2}$			40	μA	$V_O = 0.4$ V $V_{CC} = 5.5$ V
Input Clamp Voltage	$-V_{IC}$			1.2	V	$I_I = -18$ mA $V_{CC} = 4.5$ V
Power Supply Current	I_{CC}		80	130	mA	All Inputs Grounded, $V_{CC} = 5.5$ V
Output High Voltage	V_{OH}	2.4			V	$I_O = -2.4$ mA $V_{CC} = 4.5$ V
Output Short Circuit Current	$-I_{SC}$	15		60	mA	$V_O = 0$ V

CAPACITANCE ($V_{CC} = 5$ V, $f = 1$ MHz, $T_a = 25$ °C)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT	TEST CONDITION
Input Capacitance	C_{IN}		8	pF	$V_{IN} = 2.5$ V
Output Capacitance	C_{OUT}		10	pF	$V_{OUT} = 2.5$ V

A.C. CHARACTERISTICS ($V_{CC} = 4.5$ to 5.5 V, $T_a = 0$ to 75 °C)

Characteristic	Symbol	412C/D-1		412C/D		Unit
		min.	max.	min.	max.	
Address Access Time	t_{AA}		35		45	ns
Chip Select Access Time	t_{ACS}		25		30	ns
Chip Select Disable Time	t_{DCS}		25		30	ns

- Note 1. Output Load: See Fig. 1.
 Note 2. Input Waveform: 0.0 V for low level and 3.0 V for high level, less than 10 ns for both rise and fall times.
 Note 3. Measurement References: 1.5 V for both inputs and outputs.
 Note 4. C_L in Fig. 1 includes jig and probe stray capacitances.

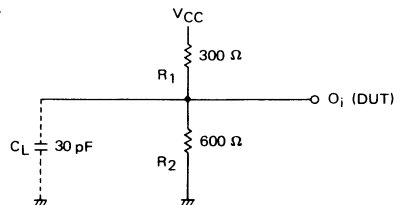


Fig. 1


Programming Specification

It is imperative that this specification be rigorously observed in order to correctly program the μPB412C and 412D. NEC will not accept responsibility for any device found to be defective if it were not programmed according to this specification.

CHARACTERISTIC	LIMIT	UNIT	NOTES
Ambient Temperature	25 ±5	°C	
Programming Pulse			
Amplitude	200 ±5 %	mA	15 V point/150 Ω load.
Clamp Voltage	28 +0 % -2 %	V	
Ramp Rate (Both in Rise and in Fall)	70 MAX.	V/μs	
Pulse Width	7.5 ±5 %	μs	
Duty Cycle	70 % MIN.		
Sense Current			
Amplitude	20 ±0.5	mA	15 V point/150 Ω load.
Clamp Voltage	28 +0 % -2 %	V	
Ramp Rate	70 MAX.	V/μs	
Sense Current Interruption before and after address change	10 MIN.	μs	
Programming VCC	5.0 +5 % -0 %	V	
Maximum Sensed Voltage* for programmed "1"	7.0 ±0.1	V	
Delay from trailing edge of programming pulse before sensing output voltage	0.7 MIN.	μs	

* A bit is judged to be programmed when two successive sense readings 10 μs apart with no intervening programming pulse, pass the limit. When this condition has been met, four additional pulses are applied and the pulse train, then the sense current is terminated.


Fig. 2 Typical Output Voltage Waveform.

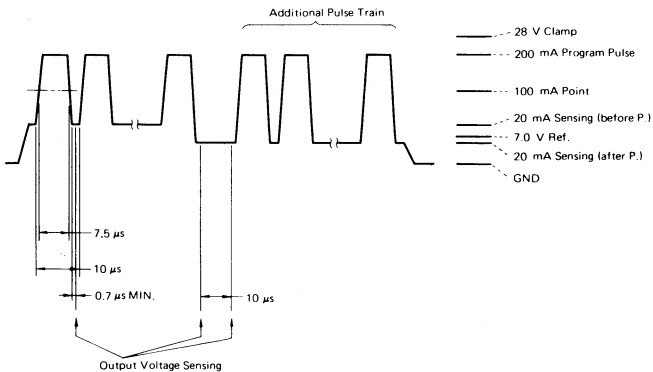

Package Dimensions

16 PIN Plastic DIP (300 mil)

Item	Millimeters
A	20.32 max
B	1.27 max
C	2.54 [TP]
D	.50 ± .10
E	17.78
F	1.2 min
G	3.5 ± .03
H	.51 min
I	4.31 max
J	5.08 max
K	7.62 [TP]
L	6.4
M	.25 ^{+ .10} _{-.05}
N	1.0 min

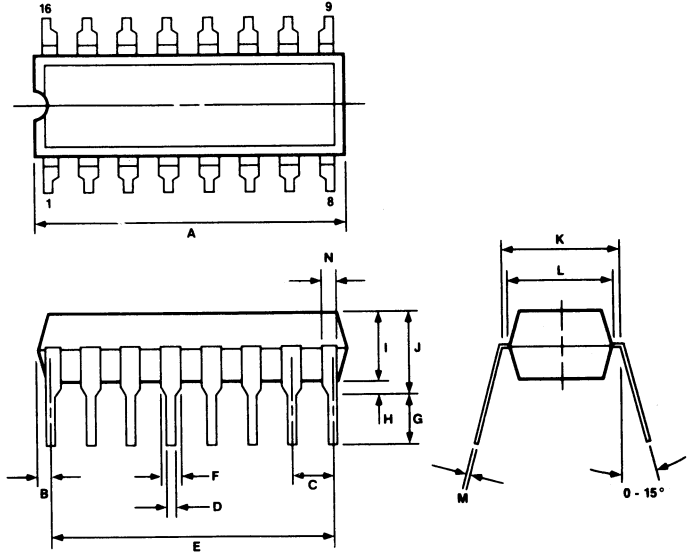

16 PIN Cerdip DIP (300 mil)

ITEM	MILLIMETERS
A	20.32 MAX.
B	1.27 MAX.
C	2.54 (T.P.)
D	0.46 ^{+0.05}
F	1.42 MIN.
G	3.5 ^{+0.3}
H	0.51 MIN.
I	3.70
J	5.08 MAX.
K	7.62 (T.P.)
L	6.75
M	0.25 ^{+0.005}
N	0.25
P	0.89 MIN.

