




TERMINAL BLOCKS

- 3.5mm Pitch
- Flame Retardant Material
- 1mm² wire acceptance
- UL/ CE approved
- Closed end headers
- Professional rising clamp


3.5mm PITCH PLUG IN

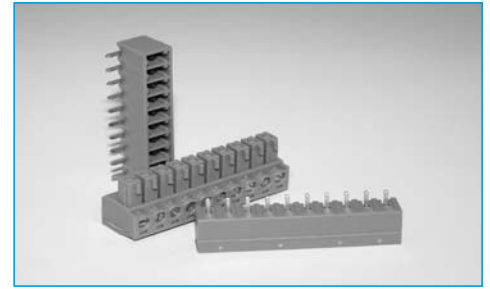

SPECIFICATION

Rating:	9A/130V	Pin/terminal:	5μ tinned, phosphor bronze
Dielectric Strength:	≥1.25KV/60sec	Rising clamp:	5μ Nickel copper flash brass
Insulation Resistance:	≥5MΩ	Screw/torque:	M2 steel, 6μ zinc colour passivated and tropicalised/0.4Nm
Working temperature:	-20°C to 125°C	Recommended PCB hole size:	ø1.0mm
Short Period:	160°		
Moulding:	UL94V-0 flame retardant PA66		

OUTLINE DRAWING

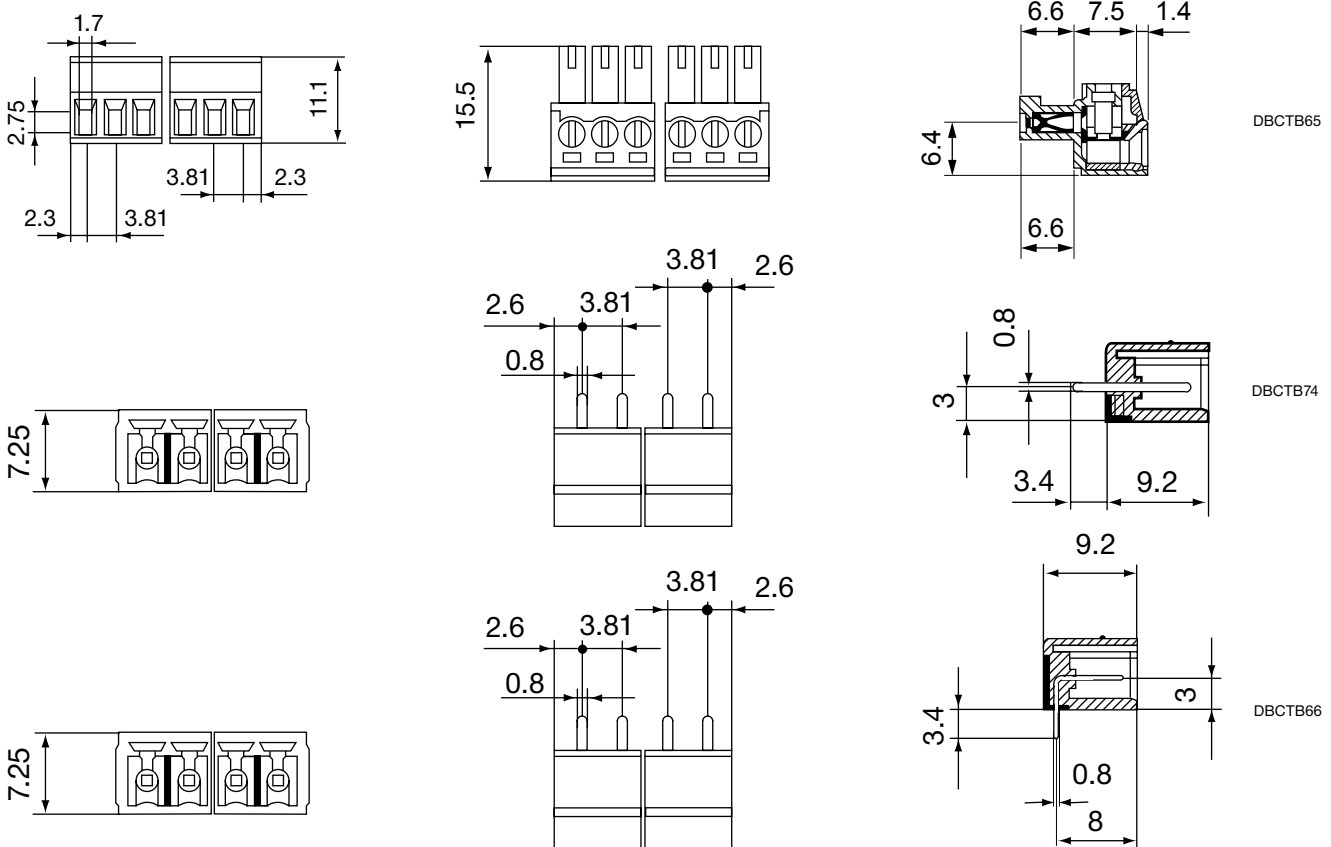

ORDERING INFORMATION

DBC	TB	65	/2
Dubilier Connectors	Series Terminal Block	Style 65=Style 65 74=Style 74 66=Style 66	N° of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details