

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0351510412](#)
Status: **Active**
Overview: [versablade](#)
Description: 6.20mm (.244") Pitch Wire-to-Wire VersaBlade™ Hybrid Receptacle Housing, 4 Circuits, Polyester UL94V-0, Red

Documents:

3D Model	Product Specification PS-35524-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72090206
UL	E29179

General

Product Family	Crimp Housings
Series	35151
Comments	Polarized to Mating Part, Positive Lock
Overview	versablade
Product Name	VersaBlade™


Physical

Circuits (maximum)	4
Color - Resin	Red
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Polyester
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.350 In
Pitch - Mating Interface (mm)	8.90 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +120°C

Material Info

Reference - Drawing Numbers

Product Specification	PS-35524-001
Sales Drawing	SD-35151-0410

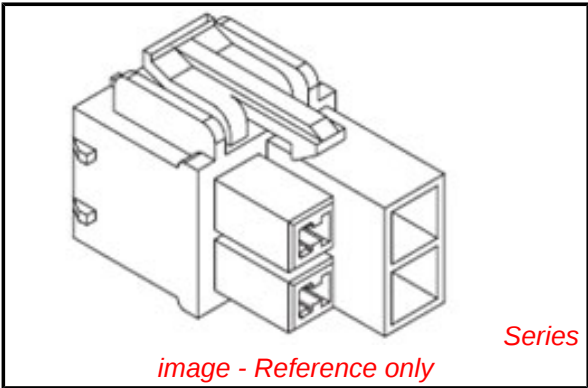

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.





Search Parts in this Series

[35151Series](#)

Mates With

Use With

VersaBlade™ Crimp Terminals, [35745](#) ,
[35746](#) , [35747](#)

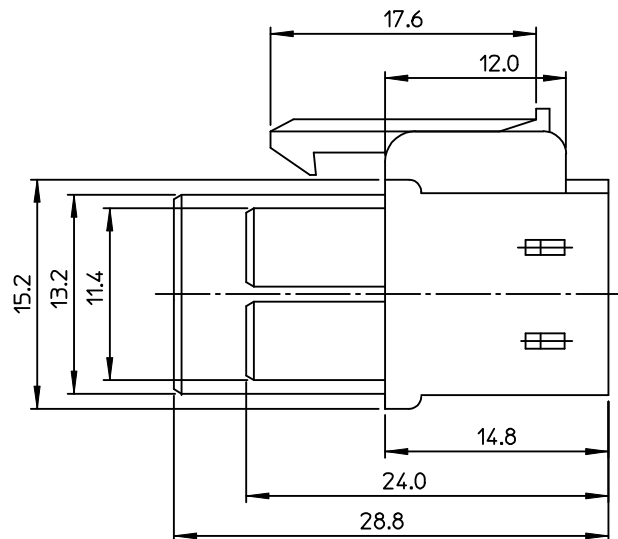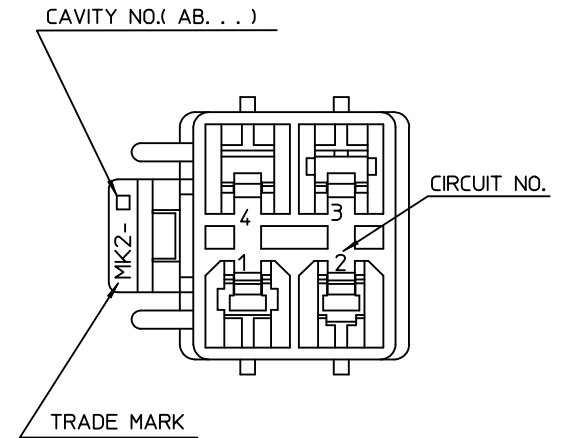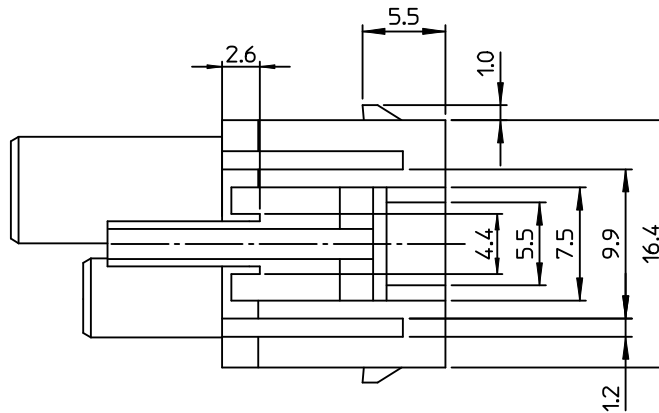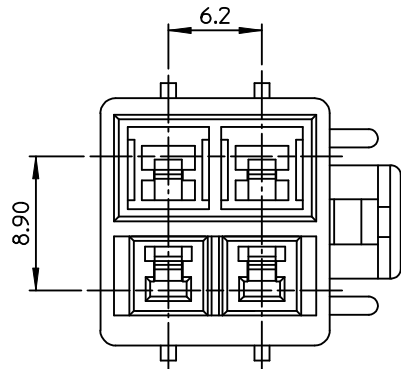

NOTES

1. MATERIAL : SEE TABLE

N	PRODUCT		MATERIAL	
	PART NO	MATERIAL NO	COLOR	DESCRIPTION
1	35151-0410	351510410	NATURAL	PBT UL94V-0
2	35151-0412	351510412	RED	
3	35151-0413	351510413	YELLOW	
4	35151-0414	351510414	BLUE	
5	35151-0419	351510419	⊙NATURAL	PC/PET UL94V-0
6	35151-3419	351513419	YELLOW	
7	35151-4419	351514419	BLUE	

2. MATED HOUSING : 35150-040*/041*

3 . APPLICATION TERMINAL : 35745 - **** (3CKT)
35746 - **** (1CKT)
35747 - **** (4CKT)
35748 - **** (2CKT)

4. APPLICABLE T.P.A : 35150 - 0290

REVISED EC NO: KOR2010-0068 DRWN: JHPARK01 2009/10/19 CHKD: WY. YANG 2009/10/20 APPR: YUNSIKKIM 2009/10/21	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY SK. HAN	DATE 2008/01/08	TITLE 6.2 PITCH W/W FEMALE HSG-4P		
			4 PLACES	± ---	± ---	CHECKED BY WY. YANG	DATE 2008/01/08			
			3 PLACES	± ---	± ---	APPROVED BY EH. JUNG	DATE 2008/01/08			
			2 PLACES	± ---	± ---	MOLEX MOLEX INCORPORATED				
			1 PLACE	± 0.3	± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			ANGULAR ± 1 °			SEE TABLE		SD-35151-0410		1 OF 01
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
						SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				