

2SC4518/4518A

Silicon NPN Triple Diffused Planar Transistor (High Voltage Switching Transistor) Application : Switching Regulator, Lighting Inverter and General Purpose

Absolute maximum ratings (Ta=25°C)

Symbol	2SC4518	2SC4518A	Unit
V _{CB0}	900	1000	V
V _{CE0}	550		V
V _{EB0}	7		V
I _C	5(Pulse10)		A
I _B	2.5		A
P _C	35(Tc=25°C)		W
T _j	150		°C
T _{stg}	-55 to +150		°C


Electrical Characteristics (Ta=25°C)

Symbol	Conditions	2SC4518	2SC4518A	Unit
I _{CB0}	V _{CB} =800V	100max		μA
I _{EB0}	V _{EB} =7V	100max		μA
V _{(BR)CEO}	I _C =10mA	550min		V
h _{FE}	V _{CE} =4V, I _C =1.8A	10 to 25		
V _{CE(sat)}	I _C =1.8A, I _B =0.36A	0.5max		V
V _{BE(sat)}	I _C =1.8A, I _B =0.36A	1.2max		V
f _r	V _{CE} =12V, I _E =-0.35A	6typ		MHz
COB	V _{CB} =10V, f=1MHz	50typ		pF


Typical Switching Characteristics (Common Emitter)

V _{CC} (V)	R _L (Ω)	I _C (A)	V _{BB1} (V)	V _{BB2} (V)	I _{B1} (A)	I _{B2} (A)	t _{on} (μs)	t _{stg} (μs)	t _f (μs)
250	139	1.8	10	-5	0.27	-0.9	0.7max	4max	0.5max


External Dimensions FM20(TO220F)

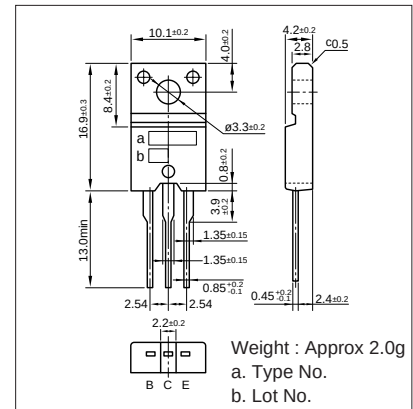


I_C-V_{CE} Characteristics (Typical)

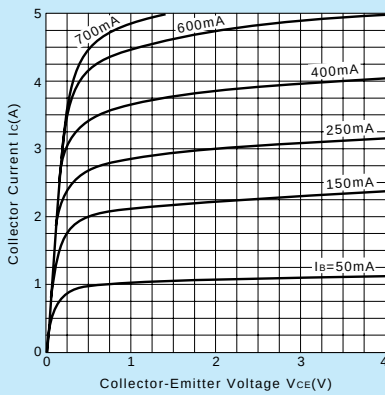


V_{CE(sat)}, V_{BE(sat)}-I_C Temperature Characteristics (Typical)

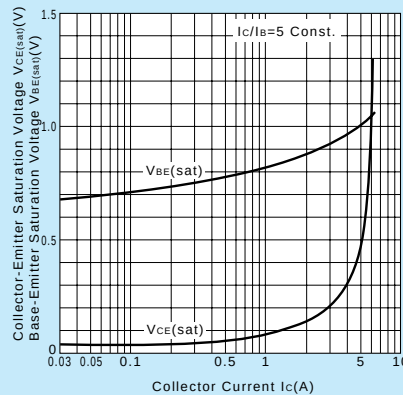


I_C-V_{BE} Temperature Characteristics (Typical)

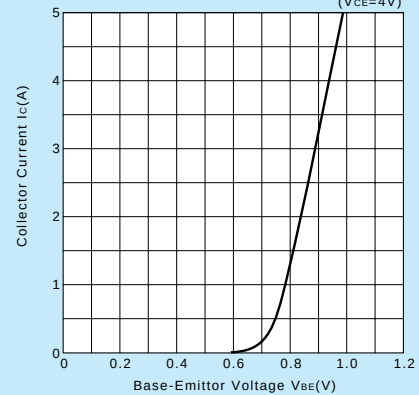


h_{FE}-I_C Temperature Characteristics (Typical)

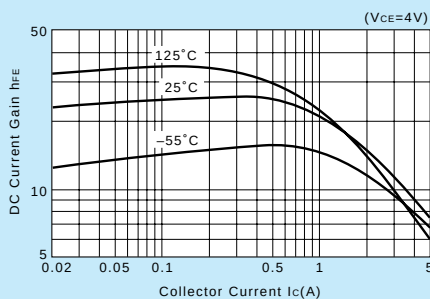


t_{on}•t_{stg}•t_f-I_C Characteristics (Typical)

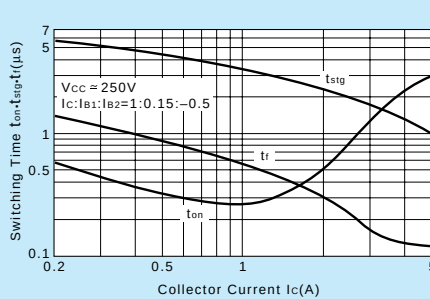


θ_{JA}-t Characteristics

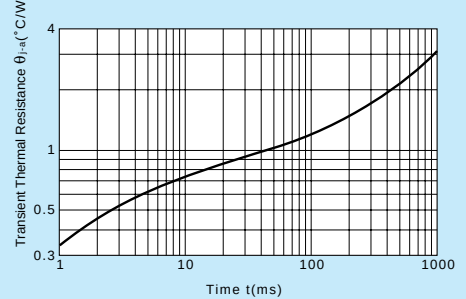

Safe Operating Area (Single Pulse)

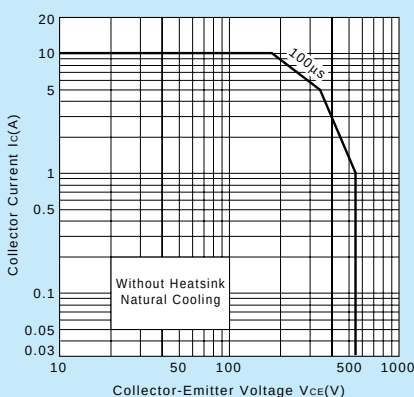

Reverse Bias Safe Operating Area

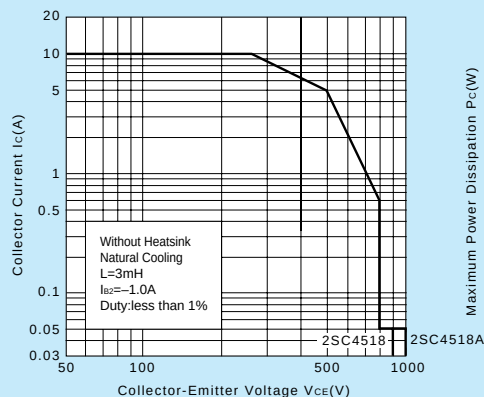

P_C-T_a Derating

