

**MD SERIES PEN6-XXXXE4:1 1.5 KV ISOLATED 5 - 6 W REGULATED SINGLE OUTPUT DIP24**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range 9 - 36 VDC (24 VDC), 18 – 72 VDC (48 VDC)  
 Filter Pi Network

**Isolation Specifications**

Rated voltage 1500 Vdc  
 Resistance 10<sup>9</sup> Ohm  
 Capacitance 390 pF typ.

**Output Specifications**

Voltage accuracy +/- 1 % typ. +/-2% max.  
 Ripple and noise (at 20 MHz BW) 75 mV p-p max.  
 Short circuit protection Continuous , restart automatic  
 Line voltage regulation +/- 0,5 % max.  
 Load voltage regulation +/- 0,5 % max.  
 Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 80 %  
 Switching frequency 260 Khz. Typ.

**Environmental Specifications**

Operating temperature (ambient) -40°C to +85°C  
 Storage temperature - 55 °C to + 125 °C  
 Derating See graph  
 Humidity Up to 90 %, non condensing  
 Cooling Free air convection


**Physical Characteristics**

Dimensions 31,75 x 20,32 x 10,16 mm  
 1,25 x 0,80 x 0,40 inches  
 Weight 19,0 g  
 Case material Nickel Coated Copper


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
PEN6-2405E4:1	9 - 36	12	260	5	1000	80
PEN6-2412E4:1	9 - 36	12	312	12	500	80
PEN6-2415E4:1	9 - 36	12	312	15	400	80
PEN6-4805E4:1	18 - 72	5	130	5	1000	80
PEN6-4812E4:1	18 - 72	5	156	12	500	80
PEN6-4815E4:1	18 - 72	5	156	15	400	80

**Dimensions**

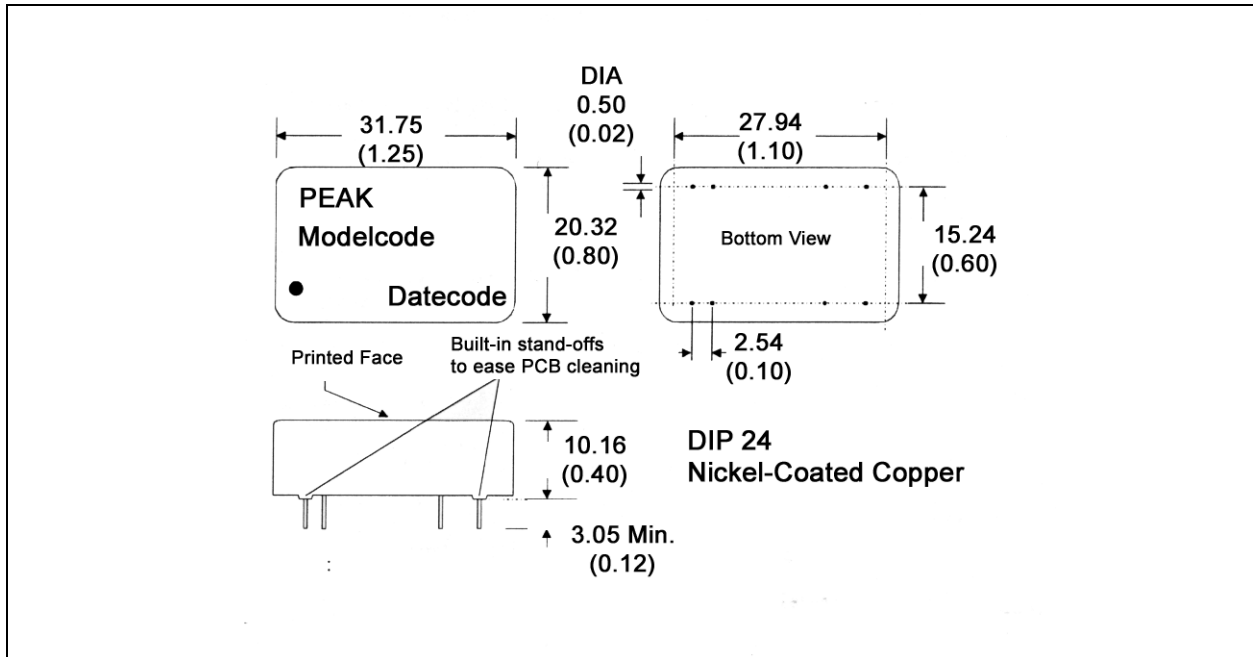

**Derating Graph and Pinning**

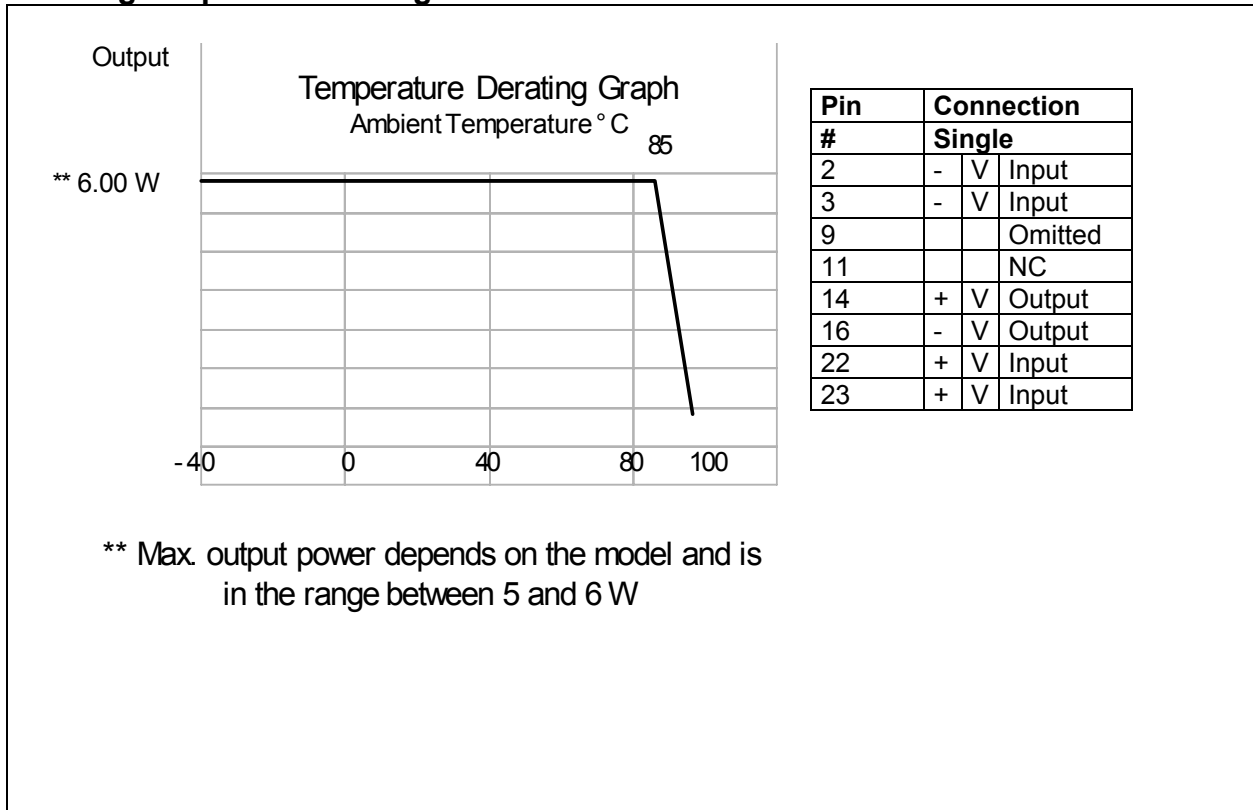

Specification can be changed without notice.

Copyright PEAK electronics GmbH