
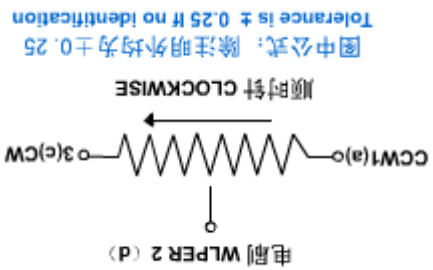


## 7.2x6.7 Square/Multiturn/Trimming Potentiometer

-- 3266Z--

Common Dimensions

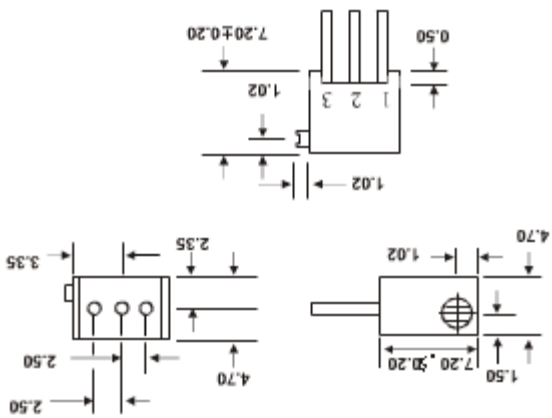


图中公式：除注明外均为±0.25  
Tolerance is ± 0.25 if no identification

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Resistance (Ohms)
100	10	10
200	20	20
500	50	50
101	100	100
201	200	200
501	500	500
102	1,000	1,000
202	2,000	2,000
502	5,000	5,000
103	10,000	10,000
203	20,000	20,000
253	25,000	25,000
503	50,000	50,000
104	100,000	100,000
204	200,000	200,000
254	250,000	250,000
504	500,000	500,000
105	1,000,000	1,000,000
205	2,000,000	2,000,000

Special resistances available

How To Order

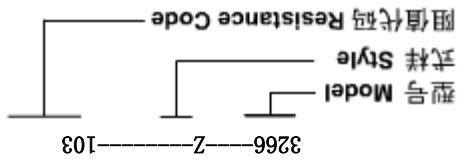

- Electrical Characteristics**
- Standard Resistance Range.....50Ω~2MΩ
  - Resistance Tolerance.....±10%
  - Absolute Minimum Resistance.....≤1%R或10Ω
  - Contact Resistance Variation.....CRV≤3%或5Ω
  - Insulation Resistance.....R1≥1GΩ(100Vac)
  - Withstand Voltage.....500Vac
  - Effective Travel.....12 turns nom
- Environmental Characteristics**
- Power Rating,315 volts max  
0.25W@70°C,0W@125°C
  - Temperature Range.....-55°C~125°C
  - Temperature Coefficient.....±50ppm/°C
  - Temperature Variation.....-55°C,30min,+125°C
  - .....30min 5cycles
  - Vibration.....10~500Hz,0.75mm,6h<sub>1</sub>
  - .....ΔR≤5%R, Δ(Uab/Uac)≤5%
- Physical Characteristics**
- Collision.....390m/s<sup>2</sup>,4000cycles
  - .....ΔR≤5%R
  - Electrical Endurance at 70°C
  - .....0.25W@70°C 1000h,
  - .....ΔR≤10%R,R1≥100MΩ,CRV≤3% or 5Ω
  - Rotational Life.....200cycles
  - .....ΔR≤10%R,CRV≤3% or 5Ω
- Marking.....when no identification, it is of±10%
- 35mN·m
- Starting Torque.....≤