

# Bolt-In Fuses

## High Current, Time Lag

ABI




Bolt-in high current, time lag fuse. Ampere ratings from 75 to 200 Amps. IR 1,000A @ 32VDC. Ideal for use in high current heavy-duty applications such as battery and alternator cables.

### Preliminary blow times:

% Rating	Time (Seconds)
135	1000
200	30
350	5
600	0.06

Part No.	Amp Rating
ABI 75	75
ABI 100	100
ABI 125	125
ABI 150	150
ABI 175	175
ABI 200	200

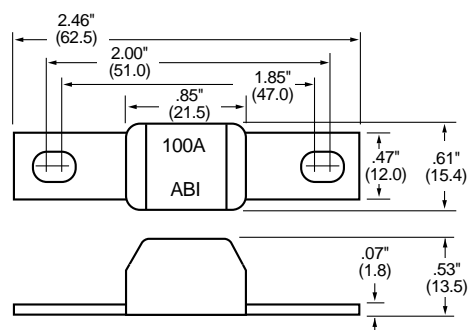

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.