



TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP34-340.DC2

EIA-17-YMWW
XXX B10

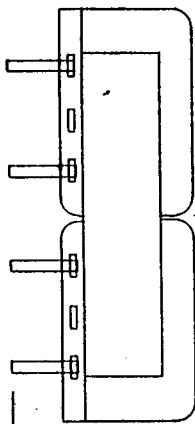



.250 REF
1.07 REF

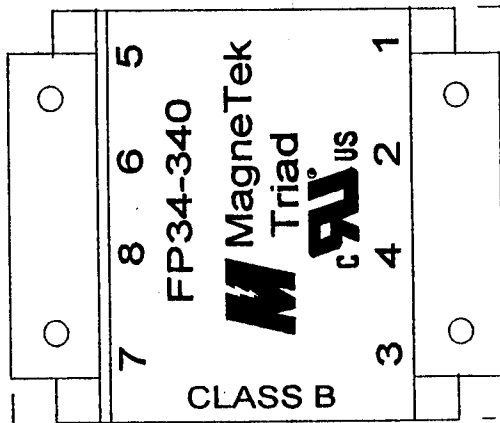

FP34-340
MagneTek
Triad
CORP.
CLASS B

2.00 REF

2.50 REF

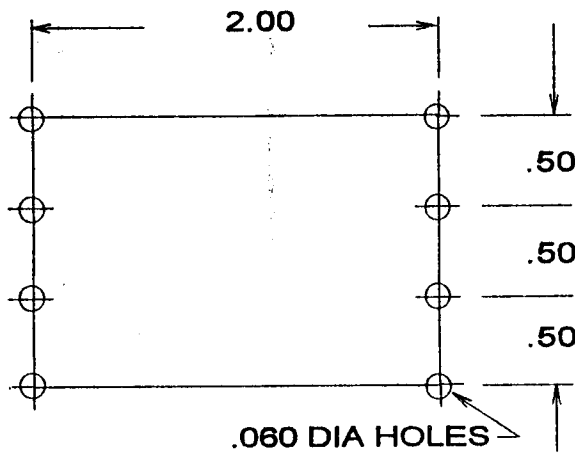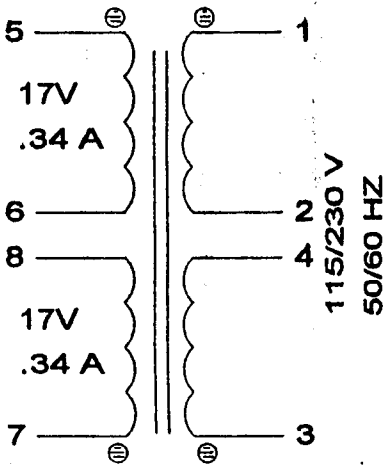

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-2 = 114 TO 140
NOM	3-4 = 114 TO 140
	5-6 = 3.87 TO 4.73
	7-8 = 3.87 TO 4.73

MAX EXCITATION CURRENT = .022 A

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

EACH SEC = 19.8 TO 20.6 V

HIPOT: 2000V PRI'S TO SEC'S
1500V PRI'S, SEC'S TO CORE
500V P-P, S-S

MagneTek

PART NO. FP34-340