



Erem Full Flush
and Super Full
Flush cutters
leave a flat
surface on cut
leads.

Precision is Sought by Many, Achieved by Few: N-Series and Ergo-Series.


Erem resharpenable „Razor“ edges are the result of over 25 years of cutting edge development.

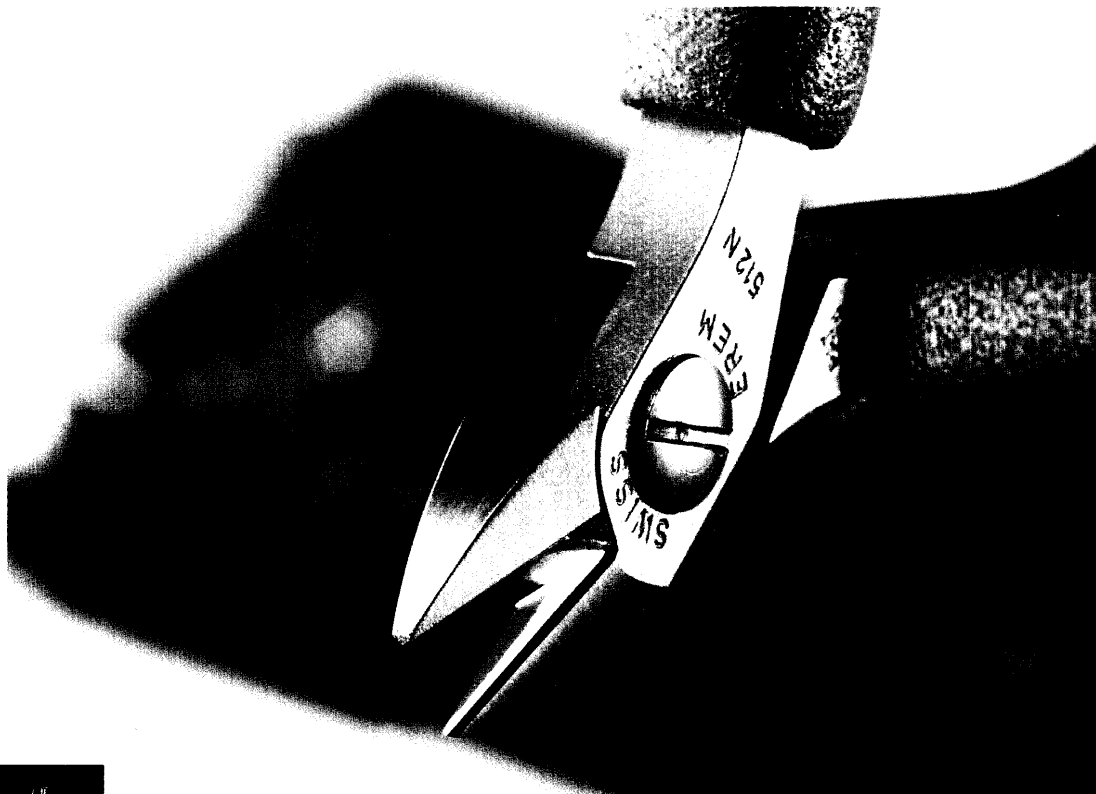

Guaranteed for over 1 million openings, the internal Erem Magic Springs provide constant, fatigue free operation, making them far superior to leaf and coil springs.





Erem's "exclusive" Inter-lock Screw Joint System, Internal Spring and Opening Stop provide smooth, wobble-free operation. The Inter-lock Screw System eliminates blade overlapping, which can cause mechanical shock and damage sensitive components.



EMOS Erem's Maximum Opening Stop limits the blade tips from opening more than 5 mm. Reduces operator fatigue by preventing excessive hand spread.

Erem

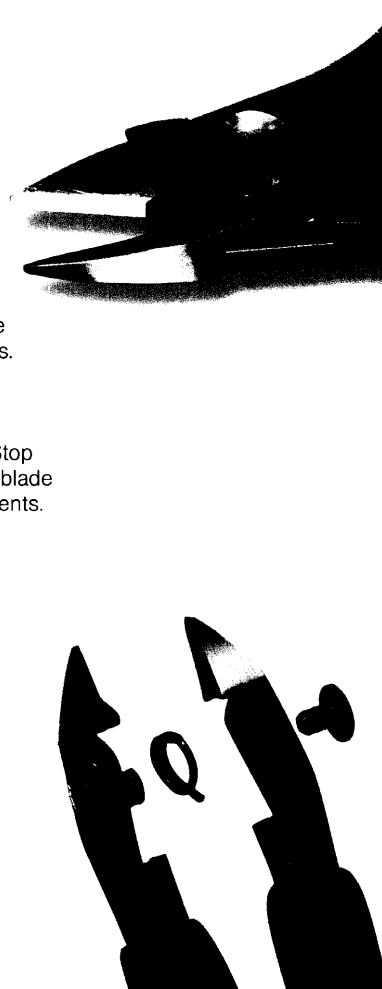

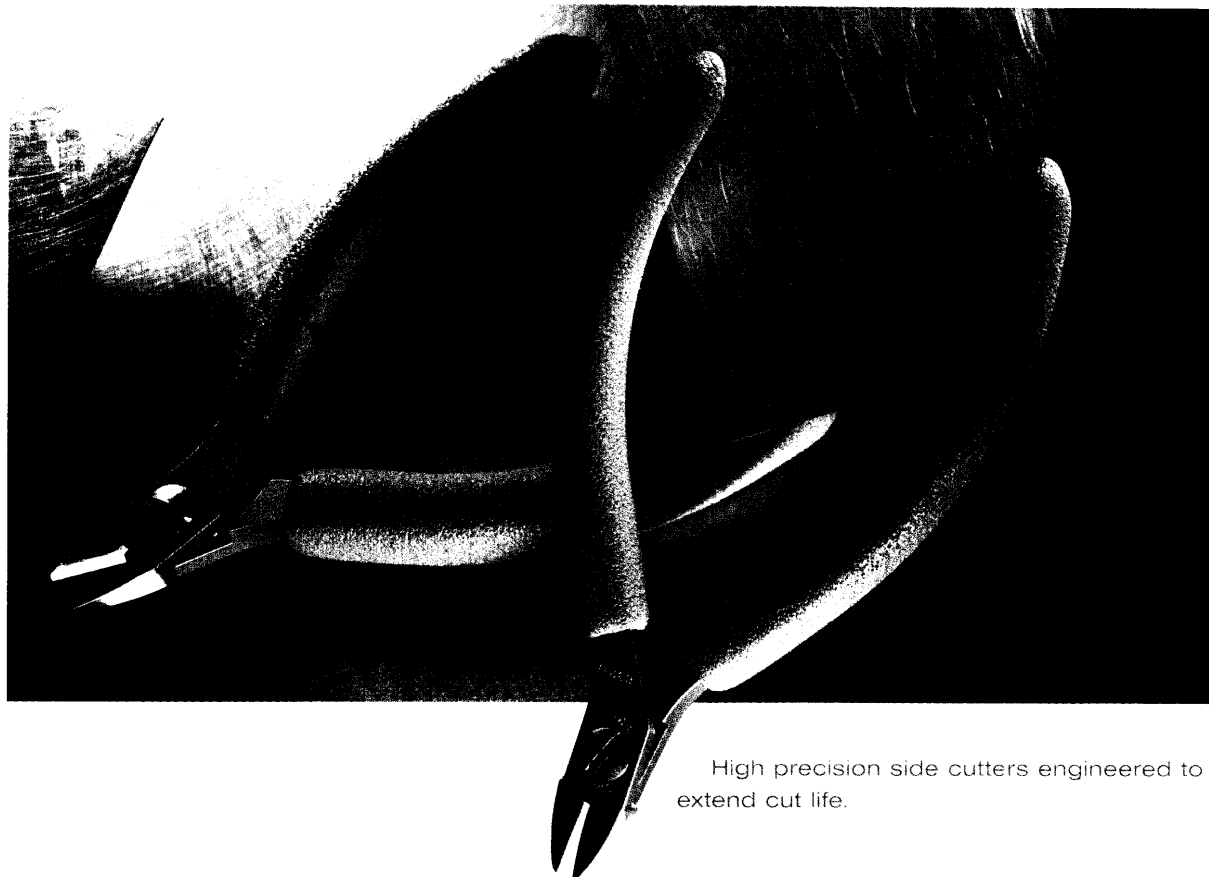

High precision side cutters engineered to extend cut life.

N-Series

No matter how closely you look at our Erem N-Series cutters, there are more qualities that you can't see. These added features make our cutters a superior value and give our products a „must have“ status for demanding users.

	Model			Max ø Cut Cu	Type of Cut
	512 N	Side cutter, Medium oval head. Semi flush cut. 115 mm / 4 1/2".	10 mm/.394	1,6 mm/.063	
	522 N	Full flush cut.	10 mm/.394	1,6 mm/.063	
	532 N	Super full flush cut.	10 mm/.394	1,6 mm/.063	
	612 N	Miniature side cutter, oval head. Semi flush cut. 110 mm / 4 1/4".	9 mm/.354	1,25 mm/.050	
	622 N	Full flush cut.	9 mm/.354	1,25 mm/.050	
	632 N	Super full flush cut.	9 mm/.354	1,25 mm/.050	
 	622 NA	Miniature side cutter, Straight head. Full flush cut. 110 mm / 4 1/4".	9 mm/.354	1 mm/.039	
	622 NB	Straight and relieved head. Full flush cut	9 mm/.354	1 mm/.039	



Erem



The ultimate in comfort, control and performance

Ergo-Series

Comfort and quality are the hallmarks of the Erem Ergo-Series. The compound-curve handles provide a grip that matches the contours of your hand, so gripping pressure is more evenly distributed over the palm. Thumb and fingers self-position easily, so the soft foam cushion grips fall naturally into the curve of the palm, making the tool much more comfortable.

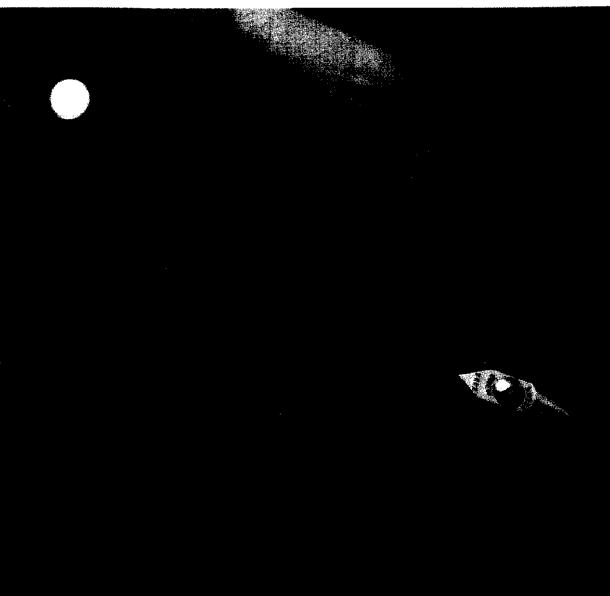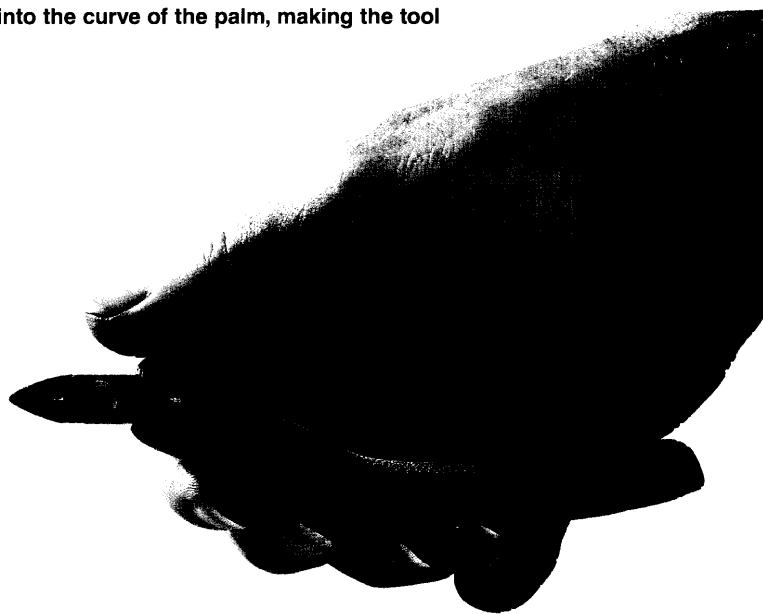

Soft foam cushion grips, ESD safe

Erem[®]

Ergo-Series

Model



Max ø Cut
Cu

Type of Cut



2212E Side cutter, medium oval head.
Long handles. Semi flush cut.
140 mm / 5 1/2".

10 mm/.394

1,6 mm/.063



2222E Full-flush cut.

10 mm/.394

1,6 mm/.063



2232E Super full-flush cut.

10 mm/.394

1,6 mm/.063



2211P Very Fine needle nose pliers for
micro electronics. Smooth full radiused jaws
165 mm / 6 1/2".



35 mm/1 3/8"

-



2242 Fine long flat nose plier.
Precise radiused edges.
160 mm / 6 1/4".


33 mm/1 5/16"



1,5 mm/.059

3,5 mm/.138

-

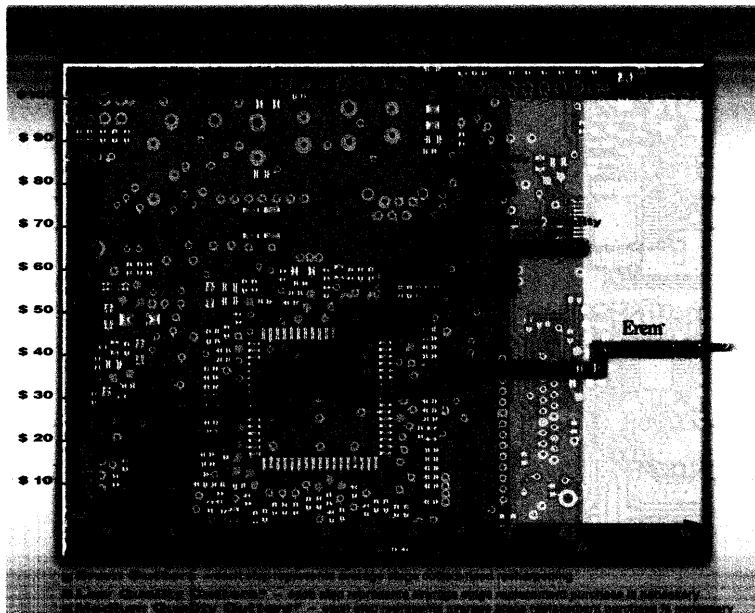

All Erem N and Ergo-Series tools come standard with „ESD Safe“ replaceable cushion grips for superior comfort and protection.

These EREM-Magic tools are manufactured using a unique Swiss Lamination technique, which is a multiple extrusion process that super-compacts the structure of Eremadium® steel and implants extra strength to the tool. This ensures longer wear.



COOPER Tools

Cooper Tools GmbH,
Carl-Benz-Str. 2, 74354 Besigheim, Germany
Postfach 1351, 74351 Besigheim, Germany
Tel: ++49(0)7143) 580-0,
Fax: ++49(0)7143) 580-108
e-mail: info@cooper-tools.de
Internet: http://www.cooper-tools.de

Cooper Tools S.A. B.P. 63,
94382 Bonneuil Cedex,
2 Ave. des Coquelicots, Z.A. des
Petits Carreaux, 94380 Bonneuil
sur Marne France.
Tel: 33 01.4513.16.80.,
Fax: 33 01.43.77.94.24

Cooper Italia S.p.A.
Via Lazio 65
20094 Buccinasco (MI), Italia.
Tel: 39 (02) 457 000 53,
Fax: 39 (02) 488 437 06

Cooper Tools, A Division of Cooper
(Great Britain) Limited, Sedling Road
Wear 6, Washington, Tyne & Wear,
NE38 9BZ England
Admin. Tel: 44 (0)191 4166062,
Sales Office Tel: 44 (0)191 4166326
Sales Office Fax: 44 (0)191 4179421

Erem S.A.,
8, Rue de la Roselière,
1401 Yverdon les Bains,
Switzerland
Tel: 41 (024) 4261206,
Fax: 41 (024) 4250977

Copyright © 1999, Cooper Industries, Inc.