



Rotary Switches

10 x 10 mm Rotary DIP Switches with 3:3 Pinout


RD1 Series



RD1H THT Top Adjust Type Terminals




RD1HF16
Flat Rotor, 16 Positions




RD1HS16
Shaft Rotor, 16 Positions


Technical drawings for RD1H, RD1HF16, and RD1HS16 showing dimensions and PCB layout details.



RD1R1 THT Right Angle Rows Spacing 2.54 mm




RD1R1F16
Flat Rotor, 16 Positions




RD1R1S16
Shaft Rotor, 16 Positions


Technical drawings for RD1R1, RD1R1F16, and RD1R1S16 showing dimensions and PCB layout details.



RD1R2 THT Right Angle Rows Spacing 5.08 mm




RD1R2F16
Flat Rotor, 16 Positions




RD1R2S16
Shaft Rotor, 16 Positions


Technical drawings for RD1R2, RD1R2F16, and RD1R2S16 showing dimensions and PCB layout details.



RD1S SMT with Top Tape Sealed



RD1SF16
Flat Rotor, 16 Positions

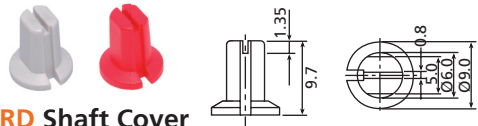

KRD Shaft Cover

Technical drawings for RD1S and KRD showing dimensions and code information.

Code

- Real Code (Rotor Color: White)
- Complementary Code (Rotor Color: Red)

Pin No.	Position															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

How to order:

RD1 + KRD
Optional: Shaft Cover

- | | |
|--|--|
| <p>1 TYPE OF TERMINALS:</p> <p>H THT Top Adjust Type</p> <p>R1 THT Right Angle Side Adjust Type with Rows Spacing 2.54 mm</p> <p>R2 THT Right Angle Side Adjust Type with Rows Spacing 5.08 mm</p> <p>S SMT with Top Tape Sealed</p> <p>2 ROTOR TYPE:</p> <p>F Flat Rotor</p> <p>S Shaft Rotor (RD1H & RD1R Only)</p> <p>3 NO. OF POSITIONS:</p> <p>08 8 Positions</p> <p>10 10 Positions</p> <p>16 16 Positions</p> | <p>4 CODE:</p> <p>R Real Code</p> <p>S Complementary Code</p> <p>5 PACKAGING TYPE:</p> <p>TB Tube</p> <p>TR Tape & Reel (RD1S Only)</p> <p>6 (OPTIONAL): SHAFT COVER COLOR:</p> <p>B White</p> <p>C Red</p> |
|--|--|

General Specifications:

FEATURES

- » Molded-in terminals and fully sealed construction
- » Gold plated contact to ensure low contact resistance

MECHANICAL

- » Mechanical Life: 2,000 steps per position
- » Operating Force: 500 gf max.
- » Operation Temperature: -20°C to +70°C
- » Storage Temperature: -40°C to +85°C

ELECTRICAL

- » Contact Rating: 25mA, 24VDC

SOLDERING PROCESSES

- » Solderability for T.H.T.: After flux 230±5°C for 5±0.5 seconds, 95% coverage
- » Resistance to soldering heat for T.H.T.: 260±5°C for 5±1 seconds
- » Reflow soldering heat for S.M.T. (reference only): 210°C for 20 seconds or less, peak temperature 230°C or less