



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMBT3906T

PNP General Purpose Transistor

Features

- Surface Mount SOT-523 Package
- Epitaxial Planar Die Construction
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:3N

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CE0}	Collector-Emitter Voltage	-40	V
V_{CBO}	Collector-Base Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5.0	V
I_C	Collector Current	-200	mA
$R_{\theta JA}$	Typical Thermal Resistance Junction to Ambient	833	$^{\circ}C/W$
P_D	Power Dissipation	150	mW
T_J	Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25 $^{\circ}C$ Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------



OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1.0mA_{dc}$, $I_B=0$)	-40		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu A_{dc}$, $I_E=0$)	-40		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=-10\mu A_{dc}$, $I_C=0$)	-5.0		Vdc
I_{CBO}	Collector Cut-off Current ($V_{CB}=-30V_{dc}$, $I_E=0$)		-50	nAdc
I_{EBO}	Emitter Cut-off Current ($V_{EB}=-5V_{dc}$, $I_C=0$)		-50	nAdc

ON CHARACTERISTICS

h_{FE}	DC Current Gain* ($I_C=0.1mA_{dc}$, $V_{CE}=-1.0V_{dc}$) ($I_C=1.0mA_{dc}$, $V_{CE}=-1.0V_{dc}$) ($I_C=10mA_{dc}$, $V_{CE}=-1.0V_{dc}$) ($I_C=50mA_{dc}$, $V_{CE}=-1.0V_{dc}$) ($I_C=100mA_{dc}$, $V_{CE}=-1.0V_{dc}$)	60 80 100 60 30	300	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA_{dc}$, $I_B=1.0mA_{dc}$) ($I_C=50mA_{dc}$, $I_B=5.0mA_{dc}$)		-0.25 -0.4	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA_{dc}$, $I_B=1.0mA_{dc}$) ($I_C=50mA_{dc}$, $I_B=5.0mA_{dc}$)	-0.65	-0.85 -0.95	Vdc

SOT-523

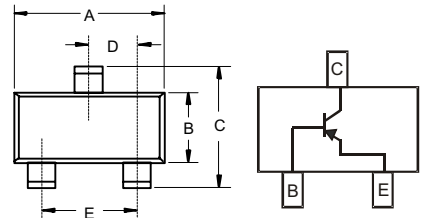

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.059	.067	1.50	1.70	
B	.030	.033	0.75	0.85	
C	.057	.069	1.45	1.75	
D	.020 Nominal		0.50Nominal		
E	.035	.043	0.90	1.10	
G	.000	.004	.000	.100	
H	.028	.031	.70	0.80	
J	.004	.008	.100	.200	
K	.010	.014	.25	.35	

SMALL-SIGNAL CHARACTERISTICS

Symbol	Parameter	Min	Max	Units
f_T	Current Gain-Bandwidth Product ($I_C=-10\text{mA}$, $V_{CE}=-20\text{V}$, $f=100\text{MHz}$)	250		MHz
C_{obo}	Output Capacitance ($V_{CB}=-5.0\text{V}$, $I_E=0$, $f=1\text{MHz}$)		4.5	pF
C_{ibo}	Input Capacitance ($V_{BE}=-0.5\text{V}$, $I_C=0$, $f=1\text{kHz}$)		10.0	pF
NF	Noise Figure ($I_C=-100\mu\text{A}$, $V_{CE}=-5.0\text{V}$, $R_S=1.0\text{k}\Omega$, $f=1\text{kHz}$)		4.0	dB

SWITCHING CHARACTERISTICS

Symbol	Parameter	Min	Max	Units
t_d	Delay Time		35	ns
t_r	Rise Time		35	ns
t_s	Storage Time		225	ns
t_f	Fall Time		75	ns

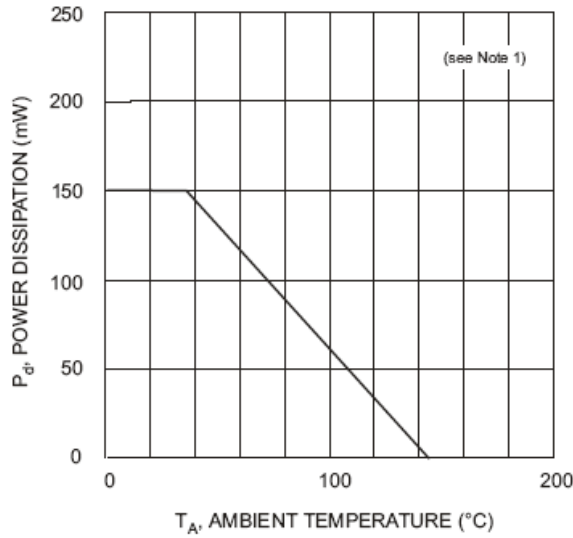


Fig. 1, Power Derating Curve

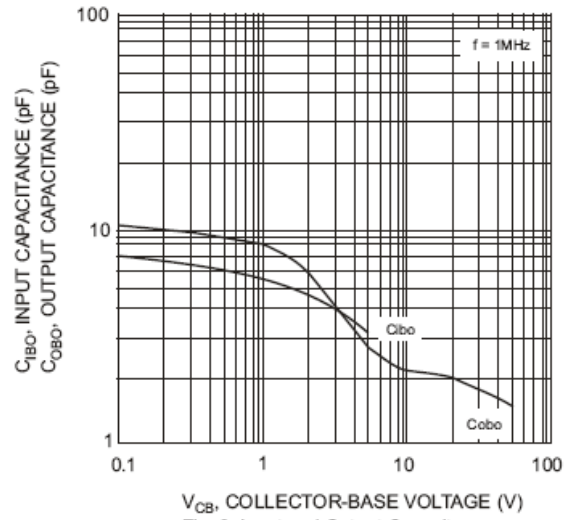


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

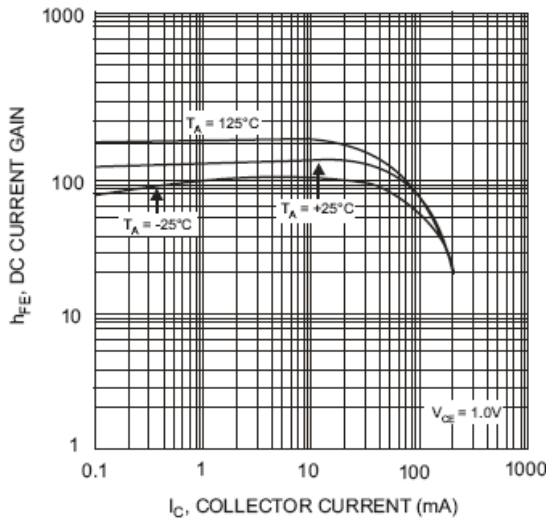


Fig. 3, Typical DC Current Gain vs. Collector Current

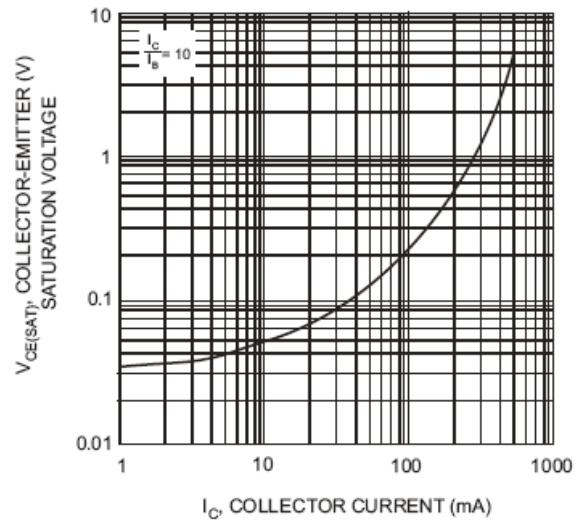


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

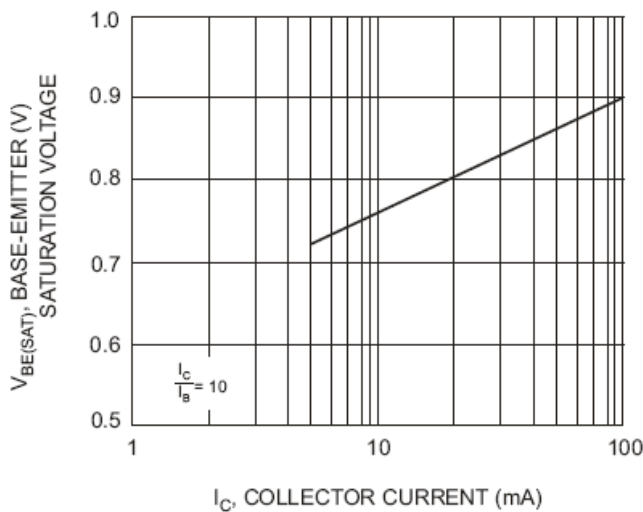


Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.