





95.75

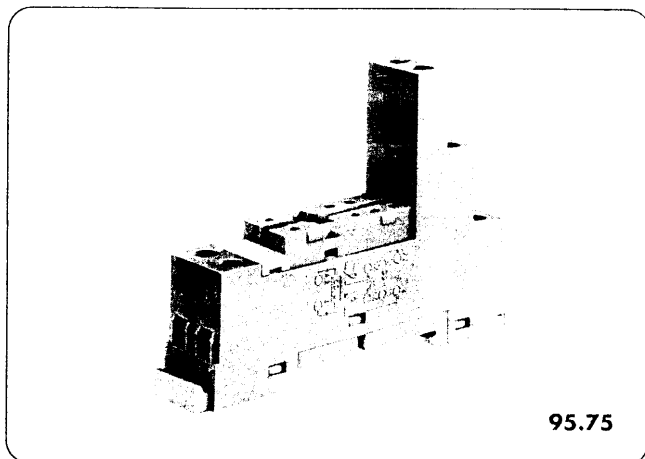

95.85.1

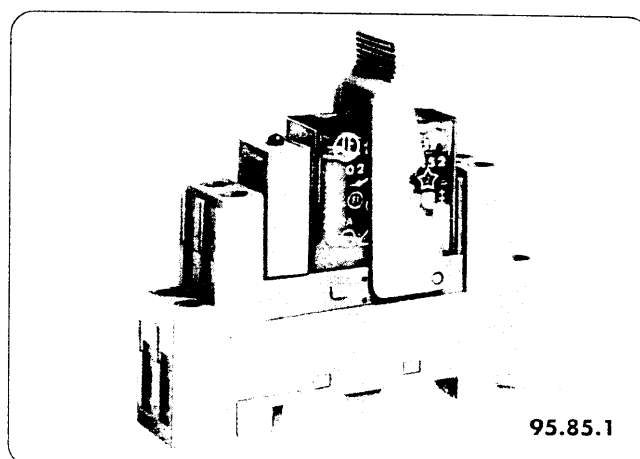

ZOCCOLO A MORSETTI

(montaggio a pannello o su barra DIN 46277)

TIPO 95.75 per relè tipo 40.51 - 40.52 - 40.61

Completo di: **TIPO 095.71** ponticello di ritenuta

Accessori: **SERIE 99.01** moduli di segnalazione e protezione bobina

CARATTERISTICHE

- PORTATA: 10 A 250 V
- ISOLAMENTO: $\geq 10^3$ M Ω
- RIGIDITÀ DIELETTRICA: ≥ 2 kV AC
- MATERIALE ZOCCOLO: PPEm autoestinguente (V1)
- CONNESSIONI: Cu Zn 33 nichelate
- GRADO DI PROTEZIONE: IP 20
- Viti imperdibili con testa a taglio combinato (lama e croce).
- Etichetta d'identificazione.

CLAMP TERMINAL SOCKET

(panel or DIN 46277 rail mounting)


TYPE 95.75 for relay type 40.51 - 40.52 - 40.61

Supplied with: **TYPE 095.71** retaining clip

Accessories: **SERIES 99.01** module facilities

CHARACTERISTICS

- LOAD: 10 A 250 V
- INSULATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- BODY MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

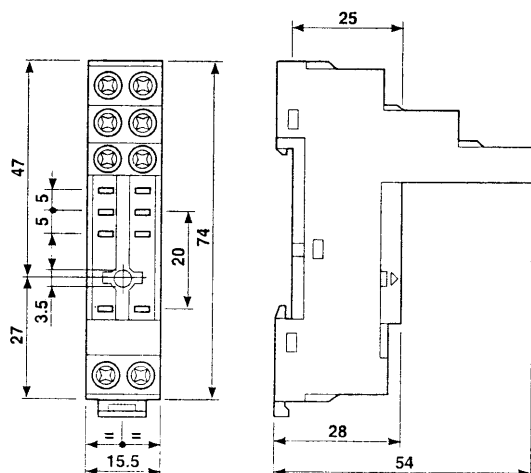

ZOCCOLO A MORSETTI

(montaggio a pannello o su barra DIN 46277)

TIPO 95.83.1 per relè tipo 40.31

TIPO 95.85.1 per relè tipo 40.51 - 40.52 - 40.61

Accessori: **TIPO 095.91** ponticello di ritenuta e sgancio

SERIE 99.80 moduli di segnalazione e protezione bobina

I moduli di segnalazione e protezione bobina, il ponticello di ritenuta e sgancio non sono compresi nella confezione.

CARATTERISTICHE

- PORTATA: 12 A 250 V
- ISOLAMENTO: $\geq 10^3$ M Ω
- RIGIDITÀ DIELETTRICA: ≥ 2 kV AC
- MATERIALE ZOCCOLO: PA 66
- CONNESSIONI: Cu Zn 33 nichelate
- GRADO DI PROTEZIONE: IP 20
- Viti imperdibili con testa a taglio combinato (lama e croce).
- Etichetta d'identificazione.

CLAMP TERMINAL SOCKET

(panel or DIN 46277 rail mounting)

TYPE 95.83.1 for relay type 40.31

TYPE 95.85.1 for relay type 40.51 - 40.52 - 40.61

Accessories: **TYPE 095.91** retaining and release clip

SERIES 99.80 module facilities

Module facilities, retaining and release clip are not included in the packaging.

CHARACTERISTICS

- LOAD: 12 A 250 V
- INSULATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- BODY MATERIAL: PA 66
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

