


COMPACT POWER TWIN RELAY

1POLE X 2, H-BRIDGE—25 A FOR AUTOMOTIVE APPLICATIONS

FTR-P4 Series

■ FEATURES

- Compact for high density packaging.
(60% volume of previous generation FBR512).
- High contact capacity with proven contact material.
(100,000 operations, 14 V, 25 A achieved, even with reduced size).
- Coil power savings
(600mW nominal achieved with state-of-the-art magnetic analysis/design).
- 125°C version is available.
- Ease of PCB layout
(all terminals on perimeter, coil and contact terminals separated).
- Pin compatible with low acoustic noise relay, FTR-P2.
- Optional over-voltage circuit breaking capability
(0.6mm gap, contact our representative).
- Packaging for auto-insertion
(tube packing, 30 relays/tube).

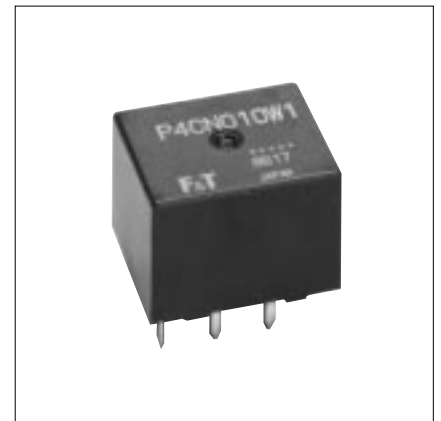

■ ORDERING INFORMATION

[Example] FTR-P4 C N 012 W1 ***
 (a) (b) (c) (d) (e) (f)

(a)	Series Name	FTR-P4 Series
(b)	Contact Arrangement	C : 1 Form C x 2 (H-Bridge)
(c)	Contact Gap	N : 0.3mm gap P : 0.6mm gap
(d)	Nominal Coil Voltage	009 : 9VDC 010 : 10VDC 012 : 12VDC
(e)	Contact Material	W1 : Silver-tin oxide-indium
(f)	Custom Designation	Nil : Standard (85°C) -01 : High temperature (125°C)

Note: The part number stamped on the relay cover does not include "FTR".

Example: Ordering part number: FTR-P4CN012W1

 Stamped on part number: P4CN012W1

■ TYPICAL APPLICATIONS

Power window Door lock	Power seat Sun roof	Tilt steering Retractable antenna
---------------------------	------------------------	--------------------------------------

FTR-P4 SERIES

■ SPECIFICATIONS

Item		Specification	
		Standard	High Temperature version
Contact	Arrangement	1 form C x 2 (H-Bridge)	
	Material	Silver-tin oxide-indium	
	Voltage Drop (Resistance)	Maximum 100 m (at 2 A 12 VDC)	
	Rating	25 A at 14 VDC (locked motor load)	
	Maximum Carrying Current	25 A / 1 hour (20° C, 100% rated coil voltage)	
	Maximum Inrush Current (Reference)	35 A	
	Maximum Switching Current (Reference)	35 A at 16 VDC	
	Minimum Switching Load*1 (Reference)	1 A, 6 VDC	
Coil	Operating Temperature Range	-40° C to +85° C (no frost)	-40° C to +125° C (no frost)
	Storage Temperature Range	-40° C to +100° C (no frost)	-40° C to +125° C (no frost)
Timing Values	Operate (at nominal voltage)	Maximum 10ms (not including bounce)	
	Release (at nominal voltage)	Maximum 5ms (not including bounce, no diode) Maximum 15ms (not including bounce, with diode)	
Life	Mechanical	10 x 10 ⁶ operations minimum	
	Electrical	100 x 10 ³ operations minimum 14 VDC, 25 A (locked motor load) (1 operation = 1 forward, 1 reverse)	
Other	Vibration Resistance	Operational	10-55Hz, 1.5mm double amplitude (=9.13G @ 55Hz) 55-100Hz, 45m/sec ² (4.6G)
		Shock Resistance	Operational Endurance
	Insulation Resistance (initial)		100M ohms @500 VAC
	Dielectric Withstanding Voltage (initial)		500 VAC
	Weight		Approximately 9.0g

*1 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operating environment.

FTR-P4 SERIES

■ COIL DATA CHART FTR-P4 Series

Model	Nominal Coil Voltage	Coil Resistance ($\pm 10\%$ at 20° C)	Must Operate Voltage	Must Release Voltage (at 20° C)	Coil Power at Nominal Voltage	Thermal Resistance (approx.)
FTR-P4CN009W1 ()	9VDC	135 Ω	5.5VDC (at 20° C) 6.9VDC (at 85° C)	0.75VDC	0.6W	73° C/W
FTR-P4CN010W1 ()	10VDC	167 Ω	6.3VDC (at 20° C) 7.9VDC (at 85° C)	0.9VDC	0.6W	73° C/W
FTR-P4CN012W1 ()	12VDC	240 Ω	7.3VDC (at 20° C) 9.2VDC (at 85° C)	1.0VDC	0.6W	73° C/W


Note: () is "Nil" or "-01"

FTR-P4 SERIES


CHARACTERISTIC DATA

1. LIFE TEST (EXAMPLES)


- Test item
14 V DC-25 A
locked motor
100K operations* minimim
0.25 seconds ON,
9.75 seconds OFF



- Change of operate and release voltage

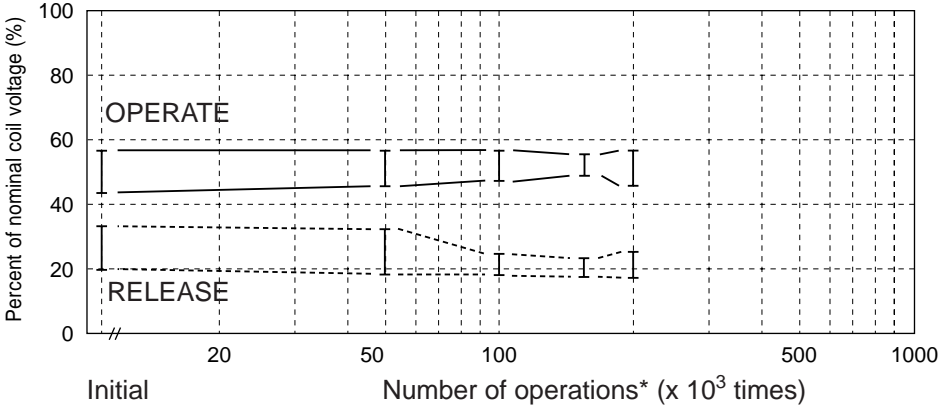


- Current wave form



- Change in contact resistance


(Measured at 6 VDC, 1A wet)

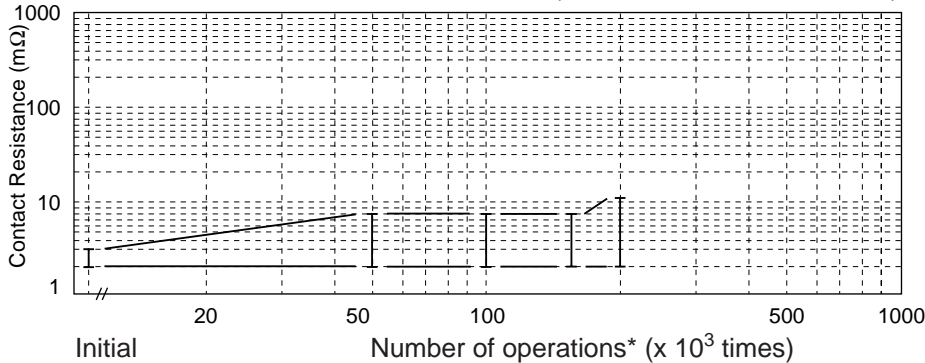


* 1 operation = 1 forward and 1 reverse

FTR-P4 SERIES


2. MAXIMUM BREAK CAPACITY

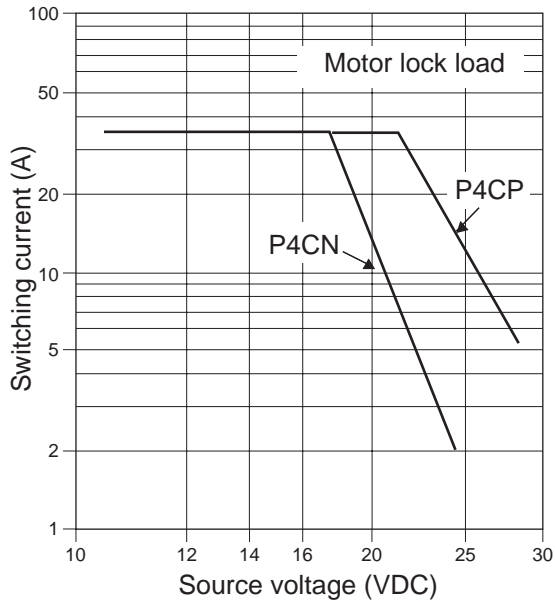

3. COIL TEMPERATURE RISE

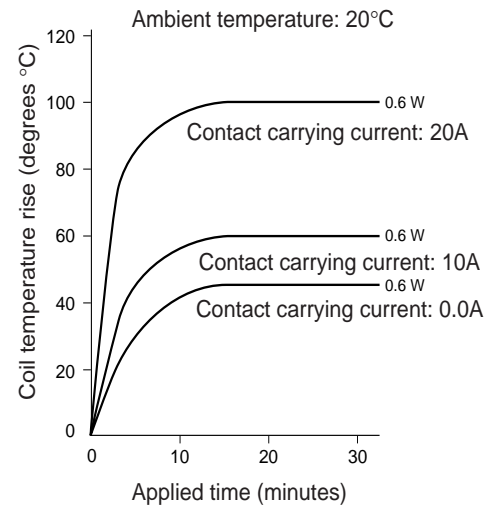


4. OPERATING COIL VOLTAGE RANGE

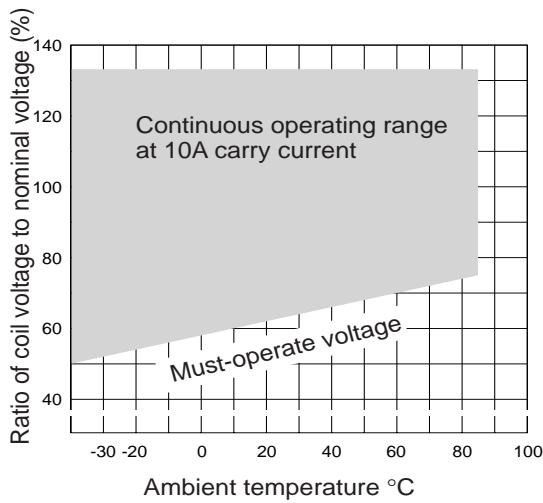


FTR-P4 SERIES




5. VIBRATION RESISTANCE CHARACTERISTIC

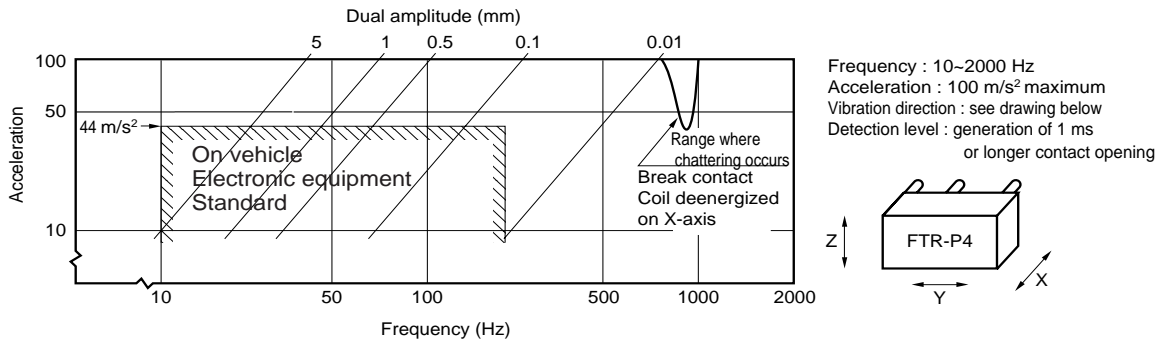

6. SHOCK RESISTANCE CHARACTERISTIC

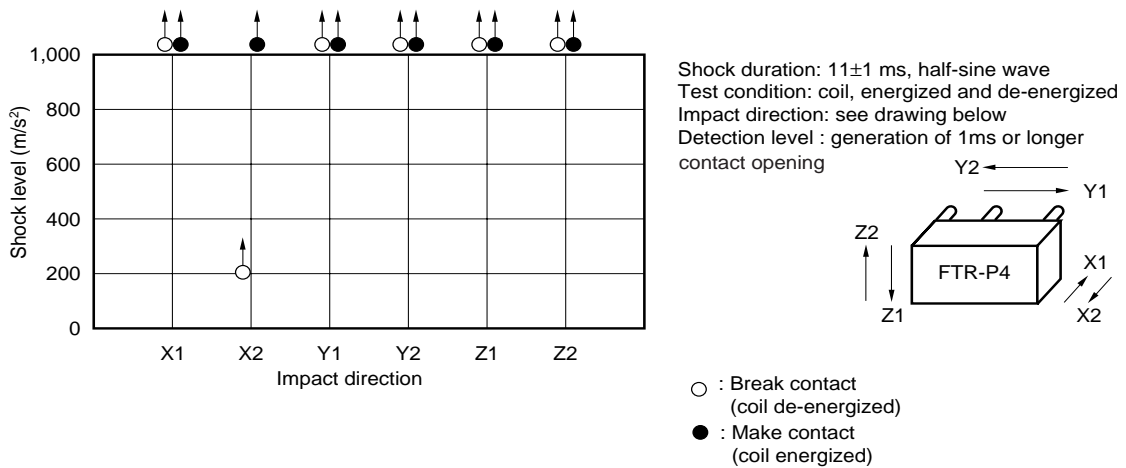


REFERENCE DATA

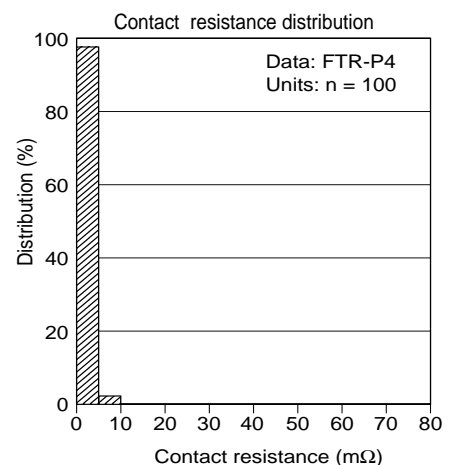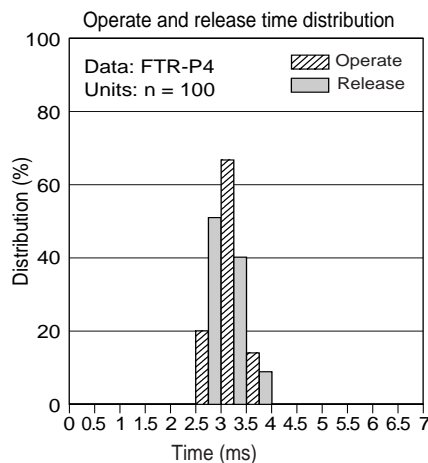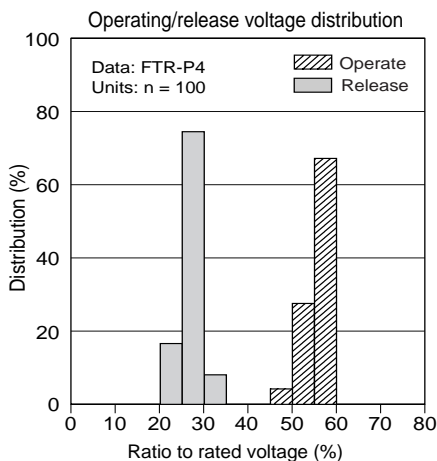

FTR-P4 SERIES

■ DIMENSIONS AND SCHEMATICS

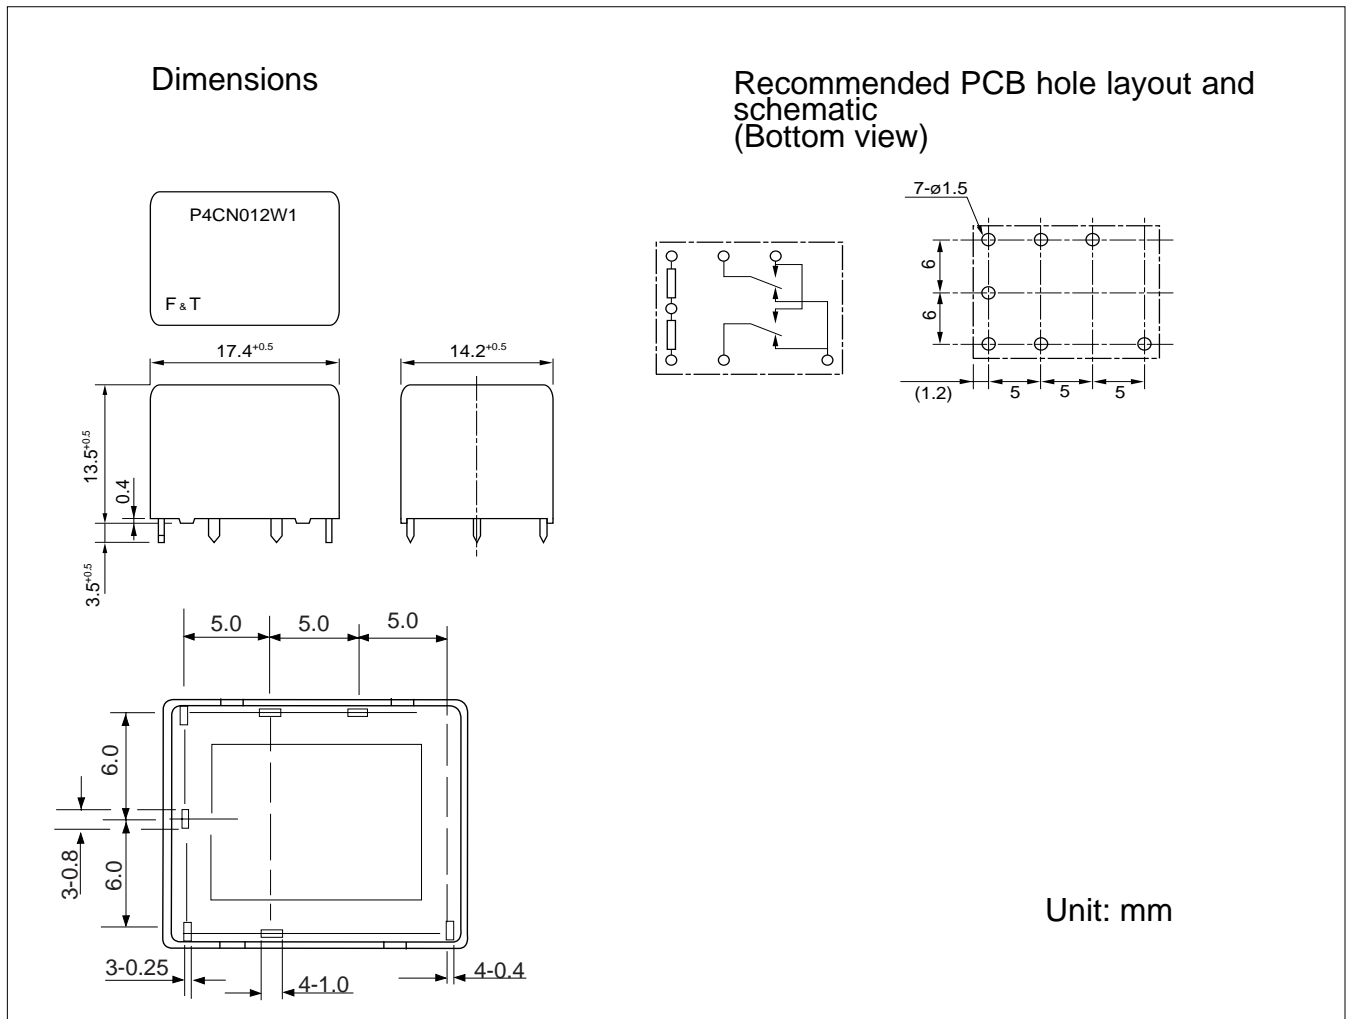

■ PRECAUTIONS

Please refer to the Engineering Reference in our relay databook for general precautions.

<p>Fujitsu Components International Headquarter Offices</p>	<p>Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com</p>	<p>Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fceu.fujitsu.com</p>
	<p>North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: marcom@fcai.fujitsu.com Web: www.fcai.fujitsu.com</p>	<p>Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #04-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com www.fcal.fujitsu.com</p>