

Description


The PUMA67S16000 is a 16Mbit CMOS High Speed Static RAM organised as 512k x 32 in a JEDEC J-leaded Ceramic Surface Mount Substrate. The output width is user configurable to 8, 16 or 32 bits using CS1~4. Access times available are 25ns, 35ns, 45 and 55ns. It has a low power standby and is 3.0V battery back-up compatible. All inputs and outputs are TTL compatible.

All versions can be screened in accordance with MIL-STD-883.


Features

- 16 Mbit Fast SRAM Module.
- Surface mount ceramic package.
- Fast access times of 25/35/45/55 ns.
- Output configurable as 32/16/8 bits wide.
- CMOS Technology.
- Operating Power 4150 / 2800 / 2130 mW (typical)
- Single 5V $\pm$ 10% power supply.
- TTL compatible inputs and outputs.
- Footprint compatible with PUMA67S4000

Block Diagram

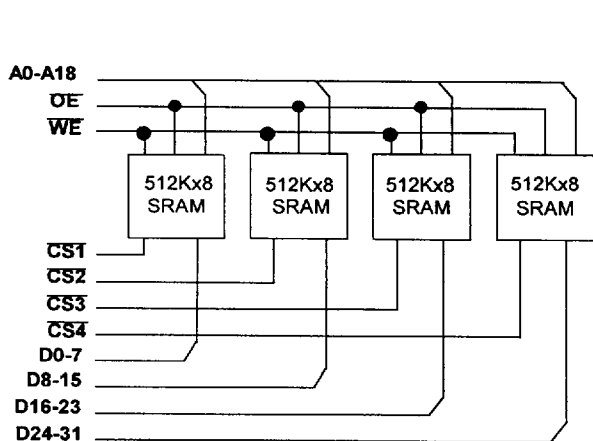

Pin Definition

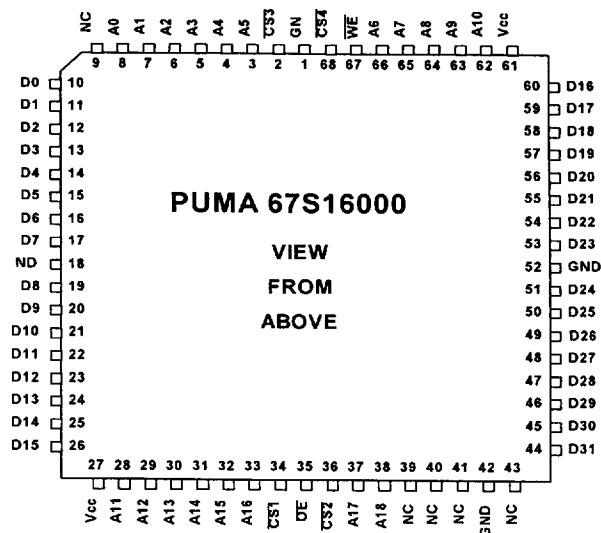

Pin Functions

A0~A18 Address Inputs
CS1~4 Chip Selects
WE Write Enable
V_{cc} Power (+5V)

D0~D31 Data Inputs/Outputs
OE Output Enable
NC No Connect
GND Ground

DC OPERATING CONDITIONS**Absolute Maximum Ratings**⁽¹⁾

Voltage on any pin relative to V_{SS} ⁽²⁾	V_T	-0.5V to +7	V
Power Dissipation	P_T	4	W
Storage Temperature	T_{STG}	-65 to +150	°C

Notes (1) Stresses above those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

(2) Pulse width: -3.0V for less than 10ns.

Recommended Operating Conditions

Parameter	Symbol	min	typ	max	units
Supply Voltage	V_{CC}	4.5	5.0	5.5	V
Input High Voltage	V_{IH}	2.2	-	6.0	V
Input Low Voltage	V_{IL}	-0.5	-	0.8	V
Operating Temperature	T_A	0	-	70	°C
	T_{AI}	-40	-	85	°C (Suffix I)
	T_{AM}	-55	-	125	°C (Suffix M, MB)

DC Electrical Characteristics ($V_{CC}=5V \pm 10\%$, $T_A=-55^\circ\text{C}$ to $+125^\circ\text{C}$)

Parameter	Symbol	Test Condition	min	typ ⁽¹⁾	max	Unit
Input Leakage Current Address, $\overline{OE}$	I_{L1}	$V_{IN}=0V$ to V_{CC}	-8	-	8	μA
	$\overline{WE}$					
	$\overline{CS}^{(1)}$					
Output Leakage Current	I_{L2}	$V_{IN}=0V$ to V_{CC}	-2	-	2	μA
	I_{LO}	$\overline{CS}^{(1)}=V_{IH}$ or $\overline{OE}=V_{IH}$, $V_{I/O}=0V$ to V_{CC} , $\overline{WE}=V_{IL}$	-8	-	8	μA
Average Supply Current	32 BIT I_{CC32}	Minimum cycle, duty=100%, $I_{I/O}=0\text{mA}$	-	-	720	mA
	16 BIT I_{CC16}	Minimum cycle, duty=100%, $I_{I/O}=0\text{mA}$	-	-	480	mA
	8 BIT I_{CC8}	Minimum cycle, duty=100%, $I_{I/O}=0\text{mA}$	-	-	360	mA
Standby Supply Current (TTL)	I_{SB}	$\overline{CS}^{(1)} \geq V_{IH}$, $V_{CC}=5.5V$	-	-	240	mA
(CMOS)	I_{SB1}	$\overline{CS}^{(1)} \geq V_{CC}-0.2V$, $0.2V \geq I/P's \geq V_{CC}-0.2V$	-	-	40	mA
Output Voltage Low	V_{OL}	$I_{OL}=8.0\text{mA}$	-	-	0.4	V
Output Voltage High	V_{OH}	$I_{OH}=-4.0\text{mA}$	2.4	-	-	V

Notes: (1) $\overline{CS}$ above is accessed through CS1-4. These inputs must be operated simultaneously for 32 bit mode, in pairs for 16 bit mode and singly for 8 bit mode.

Capacitance ($V_{CC}=5V \pm 10\%$, $T_A=25^\circ\text{C}$) Note: These parameters are calculated and not measured.

Parameter	Symbol	Test Condition	typ	max	Unit
Input Capacitance Address, $\overline{OE}$	C_{IN1}	$V_{IN}=0V$	-	34	pF
	C_{IN2}	$V_{IN}=0V$	-	6	pF
I/O Capacitance	D0-31 $C_{I/O}$	$V_{I/O}=0V$	-	42	pF (8 bit mode)

Operating Modes

The Table below shows the logic inputs required to control the operating modes of each of the SRAMs on the PUMA67S16000 module.

Mode	$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	V_{CC} Current	I/O Pin	Reference Cycle
Not Selected	1	X	X	I_{SB1}, I_{SB2}	High Z	Power Down
Output Disable	0	1	1	I_{CC}	High Z	
Read	0	0	1	I_{CC}	D_{OUT}	Read cycle
Write	0	X	0	I_{CC}	D_{IN}	Write Cycle

1 = V_{IH} ,
 0 = V_{IL} ,
 X = Don't Care

Note: $\overline{CS}$ above is accessed through $\overline{CS1\sim4}$. For correct operation, $\overline{CS1\sim4}$ must operate simultaneously for 32 bit operation, in pairs for 16 bit operation, or singly for 8 bit operation.


Low V_{CC} Data Retention Characteristics - L Version Only ($T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$)

Parameter	Symbol	Test Condition	min	typ	max	Unit
V_{CC} for Data Retention	V_{DR}	$\overline{CS1\sim4} \geq V_{CC} - 0.2\text{V}$	2.0	-	5.5	V
Data Retention Current	I_{CCDR}	$V_{CC} = 3.0\text{V}, \overline{CS1\sim4} \geq V_{CC} - 0.2\text{V},$ $0.2\text{V} \geq V_{IN} \geq V_{CC} - 0.2\text{V}$	-	-	0.8	mA
Chip Deselect to Data Retention	t_{CDR}	See Retention Waveform	0	-	-	ns
Operation Recovery Time	t_R	See Retention Waveform	5	-	-	ms

AC Test Conditions

Output Load

- *Input pulse levels: 0.0V to 3.0V
- *Input rise and fall times: 3 ns
- *Input and Output timing reference levels: 1.5V
- * $V_{CC} = 5\text{V} \pm 10\%$
- *PUMA module is tested in 32 bit mode.




AC OPERATING CONDITIONS**Read Cycle**

Parameter	Symbol	025		35		45		55		Units
		min	max	min	max	min	max	min	max	
Read Cycle Time	t_{RC}	25	-	35	-	45	-	55	-	ns
Address Access Time	t_{AA}	-	25	-	35	-	45	-	55	ns
Chip Select Access Time	t_{ACS}	-	25	-	35	-	45	-	55	ns
Output Enable to Output Valid	t_{OE}	-	15	-	15	-	15	-	15	ns
Output Hold from Address Change	t_{OH}	5	-	5	-	5	-	5	-	ns
Chip Selection to Output in Low Z	t_{CLZ}	5	-	5	-	5	-	5	-	ns
Output Enable to Output in Low Z	t_{OLZ}	0	-	0	-	0	-	0	-	ns
Chip Deselection to Output in High Z ⁽³⁾	t_{CHZ}	0	10	0	10	0	10	-	10	ns
Output Disable to Output in High Z ⁽³⁾	t_{OHZ}	0	10	0	10	0	10	0	10	ns

Write Cycle

Parameter	Symbol	025		35		45		55		Unit
		min	max	min	max	min	max	min	max	
Write Cycle Time	t_{WC}	25	-	35	-	45	-	55	-	ns
Chip Selection to End of Write	t_{CW}	15	-	15	-	15	-	15	-	ns
Address Valid to End of Write	t_{AW}	15	-	15	-	15	-	15	-	ns
Address Setup Time	t_{AS}	0	-	0	-	0	-	0	-	ns
Write Pulse Width	t_{WP}	15	-	15	-	15	-	15	-	ns
Write Recovery Time	t_{WR}	0	-	0	-	0	-	0	-	ns
Write to Output in High Z ⁽⁹⁾	t_{WHZ}	0	10	0	10	0	10	0	10	ns
Data to Write Time Overlap	t_{DW}	10	-	10	-	10	-	10	-	ns
Data Hold from Write Time	t_{DH}	0	-	0	-	0	-	0	-	ns
Output Active from End of Write	t_{OW}	5	-	5	-	5	-	5	-	ns


Read Cycle Timing Waveform^(1,2)

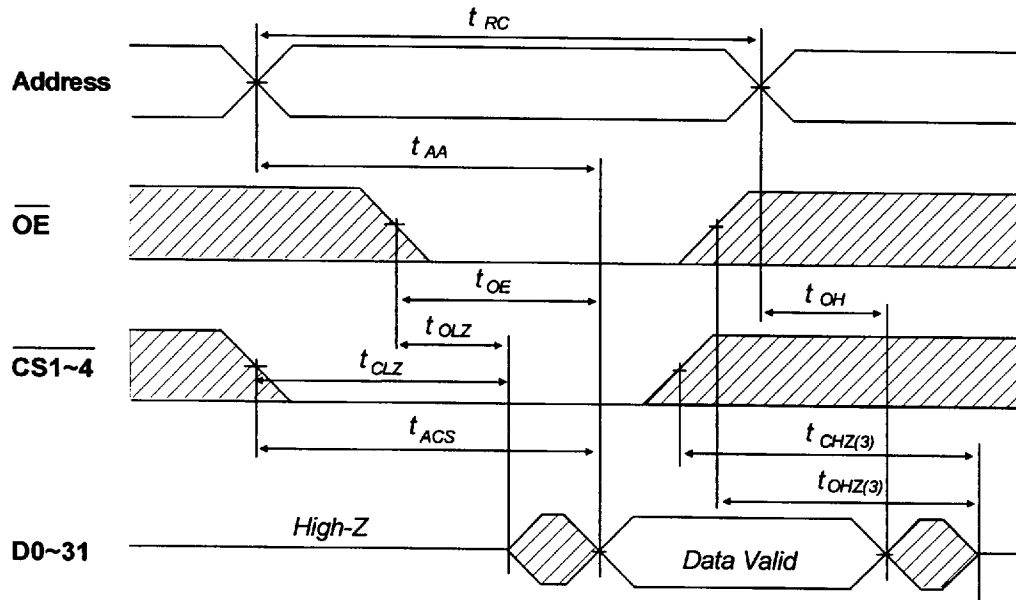


Notes:

- (1) During the Read Cycle, $\overline{WE}$ is high for the PUMA67S16000 module.
- (2) Address valid prior to or coincident with $\overline{CS}$ transition Low.
- (3) t_{CHZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels. These parameters are sampled and not 100% tested.

Write Cycle No.1 Timing Waveform

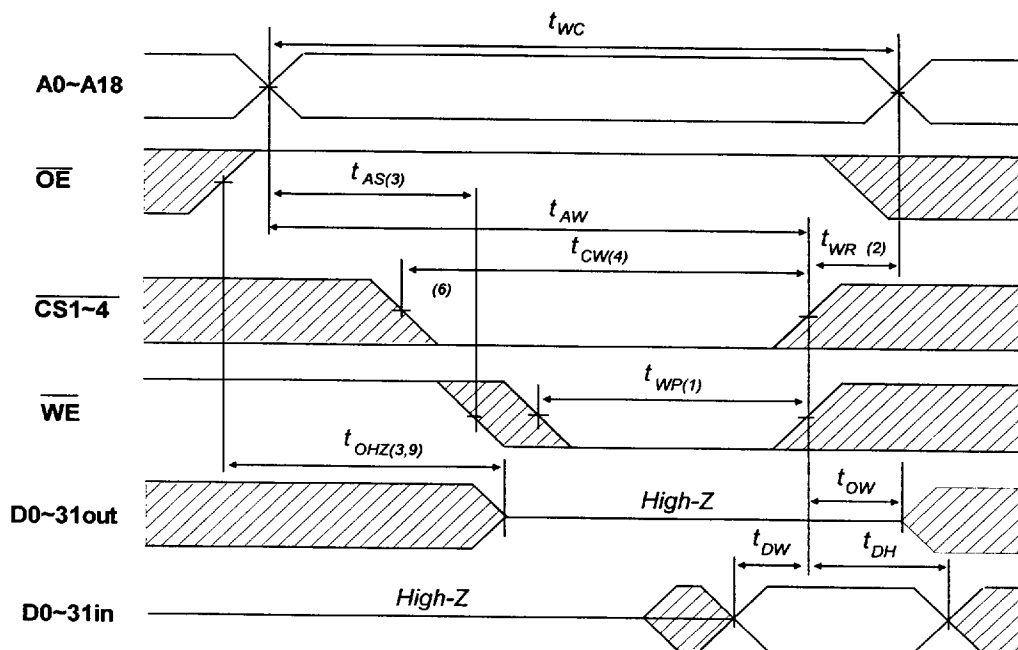


Write Cycle No.2 Timing Waveform ⁽⁵⁾

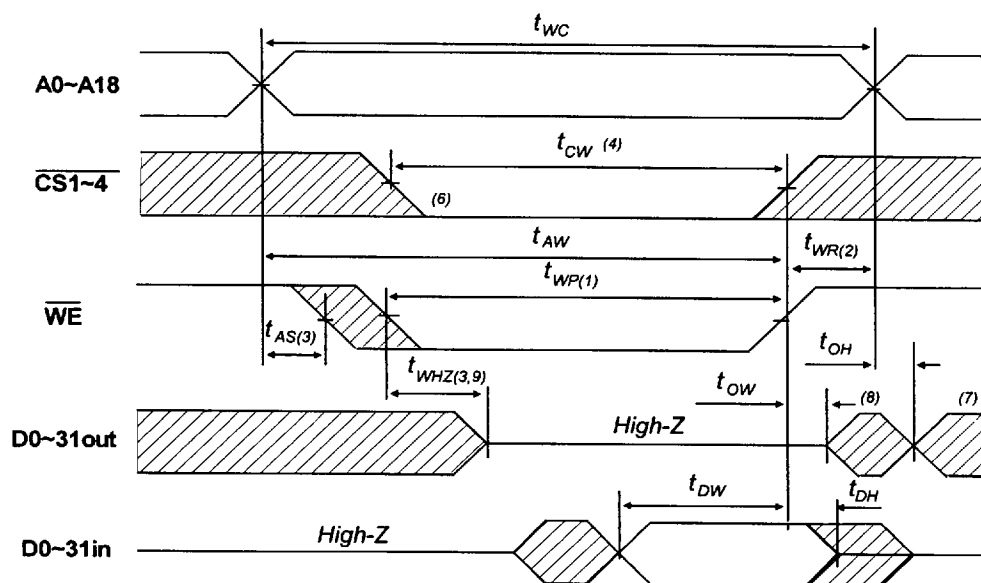


Note: These waveforms are shown for the PUMA 67S16000.

- (1) A write occurs during the overlap (t_{WP}) of a low $\overline{CS}$ and a low $\overline{WE}$.
- (2) t_{WR} is measured from the earlier of $\overline{CS}$ or $\overline{WE}$ going high to the end of write cycle.
- (3) During this period, I/O pins are in the output state. Input signals out of phase must not be applied.
- (4) If the $\overline{CS}$ low transition occurs simultaneously with the $\overline{WE}$ low transition or after the $\overline{WE}$ low transition, outputs remain in a high impedance state.
- (5) $\overline{OE}$ is continuously low. ($\overline{OE} = V_{IL}$)
- (6) D_{OUT} is in the same phase as written data of this write cycle.
- (7) D_{OUT} is the read data of next address.
- (8) If $\overline{CS}$ is low during this period, I/O pins are in the output state. Input signals out of phase must not be applied.
- (9) t_{WHZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels. These parameters are sampled and not 100% tested.

Low V_{CC} Data Retention Timing Waveform

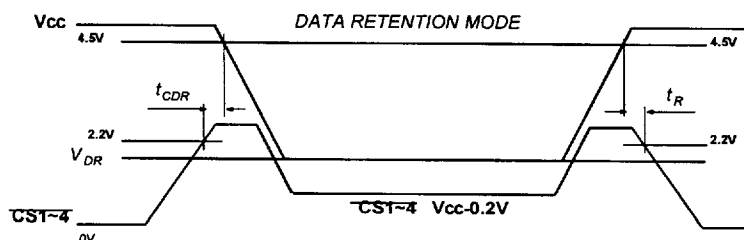

Package Details Dimensions in inches. Lead finish gold.

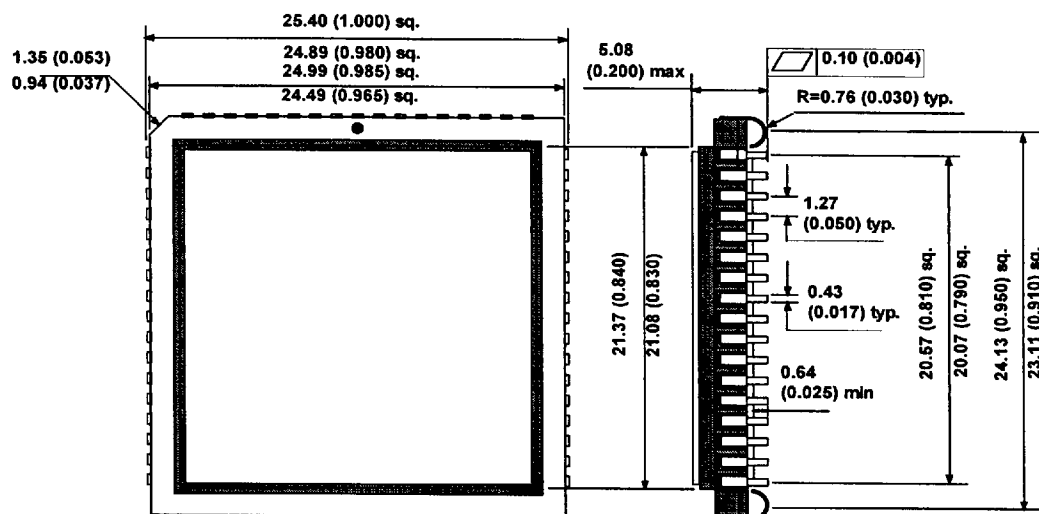

SCREENING

Military Screening Procedure

MultiChip Screening Flow for high reliability product is in accordance with Mil-883 method 5004.

MB MULTICHIP MODULE SCREENING FLOW		
SCREEN	TEST METHOD	LEVEL
Visual and Mechanical Internal visual Temperature cycle Constant acceleration	2010 Condition B or manufacturers equivalent 1010 Condition C (10 Cycles, -65°C to +150°C) 2001 Condition B (Y1 & Y2) (10,000g)	100% 100% 100%
Burn-In Pre-Burn-in electrical Burn-in	Per applicable device specifications at $T_A = +25^\circ\text{C}$ $T_A = +125^\circ\text{C}$, 160hrs minimum.	100% 100%
Final Electrical Tests Static (DC) Functional Switching (AC)	Per applicable Device Specification a) @ $T_A = +25^\circ\text{C}$ and power supply extremes b) @ temperature and power supply extremes a) @ $T_A = +25^\circ\text{C}$ and power supply extremes b) @ temperature and power supply extremes a) @ $T_A = +25^\circ\text{C}$ and power supply extremes b) @ temperature and power supply extremes	100% 100% 100% 100% 100% 100%
Percent Defective allowable (PDA)	Calculated at post-burn-in at $T_A = +25^\circ\text{C}$	10%
Hermeticity Fine Gross	1014 Condition A Condition C	100% 100%
Quality Conformance	Per applicable Device Specification	Sample
External Visual	2009 Per vendor or customer specification	100%

ORDERING INFORMATION**PUMA 67S16000LMB-025**