


Power Divider

P/N: JXWBGF-T-6-10-1000

Frequency Range(MHz)	10~1000
Insertion Loss(dB)	L: 1.0 Typ.
	M: 2.2 Typ.
	U: 3.2 Typ.
Isolation(dB)	L: 25 Typ.; 20 min
	M: 23 Typ.; 20 min
	U: 20 Typ.; 18 min
Amplitude Balance(dB)	0.6 max
Phase Balance(°)	8 max
Connectors	BNC-Female
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.245 Around

Outline Drawing (Size: mm)

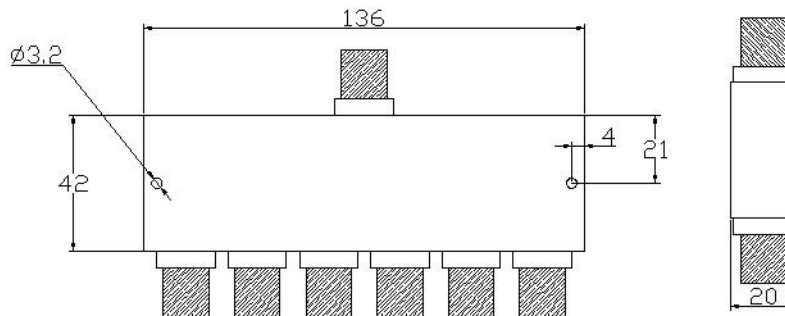

For current data sheets, please contact: sales@aacix.com