

**APPLIED  
CONCEPTS INC.**

397 Route 281 - P.O. BOX 1175  
Tully, New York 13159-1175  
Phone: (315) 696-6676 Fax: (315) 696-9923  
[www.acipower.com](http://www.acipower.com)

# AC8-V2-1476

PRODUCT DATA SHEET - PAGE 1 OF 2

## CCFL INVERTER (For Quad Tube Applications)

03/17/05

### GENERAL DESCRIPTION

This AC8-V2-1476 is designed to power 4 CCFL's up to power levels of 16 watts from a nominal +12V source.

Enable control is accomplished @ pin 5 of CON1. In addition, a +5V reference voltage is available @ pin 7 of CON1 for external use.


Intensity control is accomplished by the user providing DC level @ pin 6 of CON1.


If desired, the pwm dimming frequency of the inverter can be synchronized to the LCD frame rate via pin 8 of CON1.

All outputs are open and short circuit protected.

### MECHANICAL / ENVIRONMENTAL

Weight = 40 grams  
Altitude = 10,000 Ft maximum  
Humidity < 85% non-condensing  
Size (L x W x H) = 6.34 IN x 1.26 IN x 0.360 IN  
PCB thickness = 0.062 IN  
Mounting Holes = 0.138 IN diameter (X2)  
Input Power & Control Connector = CON1  
CCFL Output Connector(s) = CON2 - CON3- CON4 - CON5

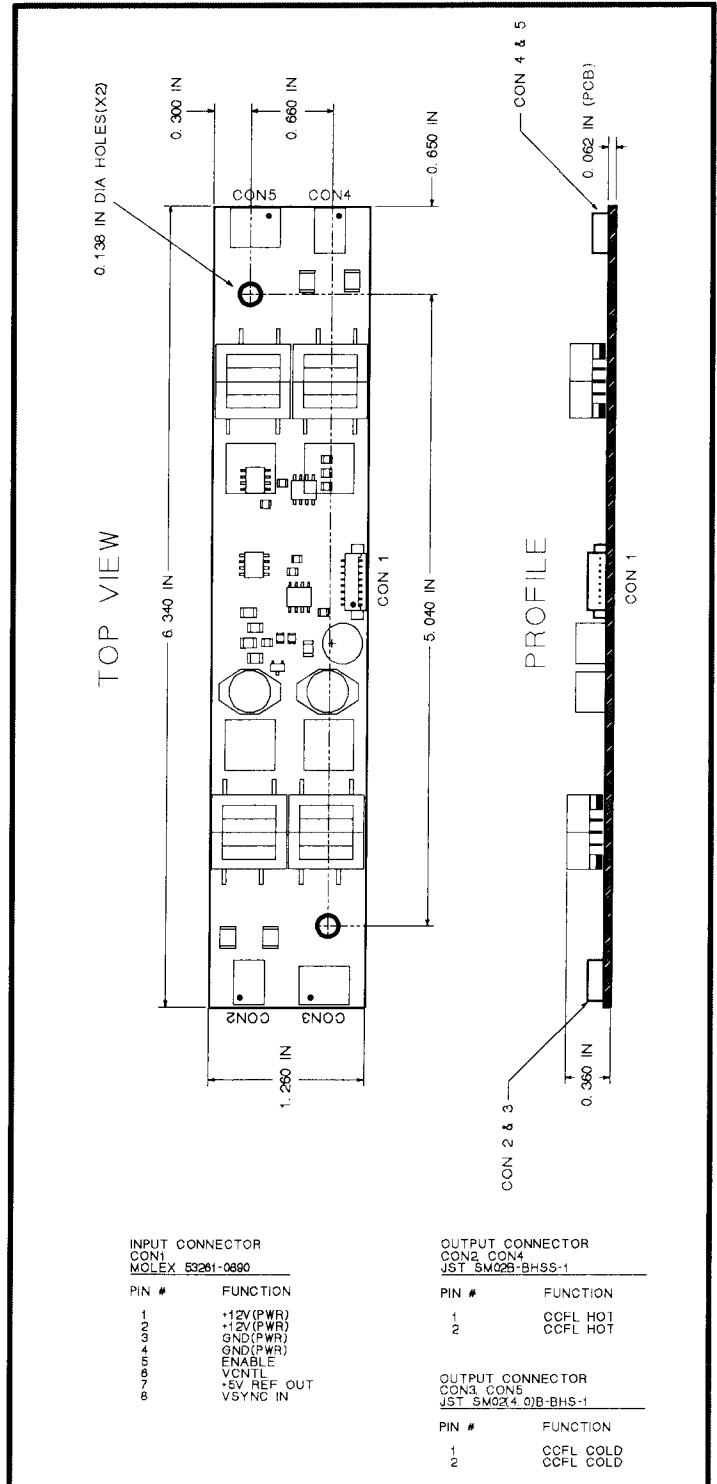



# APPLIED CONCEPTS INC.

397 Route 281 - P.O. BOX 1175  
Tully, New York 13159-1175  
Phone: (315) 696-6676 Fax: (315) 696-9923  
[www.acipower.com](http://www.acipower.com)

# AC8-V2-1476

PRODUCT DATA SHEET - PAGE 2 OF 2

## MAXIMUM RATINGS\*

03/17/05

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 14	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	27	W
Top	Operating Temperature (Still air ambient around Inverter)	0 to +70	DegC
Tstg	Storage Temperature	-20 to +105	DegC

\* Maximum Ratings are those values beyond which damage to the inverter may occur

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.8	13.2	Vdc
Lsv	Cold Cathode Fluorescent Lamp Sustaining Voltage	430	720	Vrms
VSYif	Vertical Synchronization Input Frequency	48	62	Hz
Vcntl	Intensity Control Voltage	0.5	4.5	Vdc

## ELECTRICAL CHARACTERISTICS

Vin = +12V, Lsv = 570Vrms, Vcntl = +4.5V, ENon = +4.5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Max	Unit
Lstart	Lamp Starting Voltage		1500		Vrms
Lout	Lamp Output Current		6.25	7.75	mArms
Lfreq	Lamp-Current Frequency		44	54	Khz
Pfreq	PWM Dimming Frequency	Vcntl (Pin 6) = +2.5V Vsync-In (Pin 8) = 0V	95	101	Hz
		Vsync-In (Pin 8) = 60Hz	119.8	120.2	Hz
Pdc	PWM Duty Cycle Range	Vcntl (Pin 6) = 0.5 to +4.5V	0	100	%
ENoff	Enable Control, unit OFF (Pin 5)		0	0.7	Vdc
ENon	Enable Control, unit ON (Pin 5)		3.5	5.0	Vdc
VSYhi	Vertical Sync In HI Level (Pin 8)		0	0.7	Vdc
VSYlo	Vertical Sync In LO Level (Pin 8)		3.5	5.0	Vdc
+5Vout	+5V Reference Out (Pin 7)	10k load to ground	4.6	5.3	Vdc
Iin	Input Current Draw			1.6	Adc
Eff	Electrical Efficiency		90		%