


Features

- **Advanced, High Speed Programmable Logic Device**
Improved Performance - 7.5 ns tPD, 95 MHz External Operation
Enhanced Logic Flexibility
Backward Compatible with ATV750/L Software and Hardware
- **New Flip-Flop Features**
D- or T-Type
Product Term or Direct Input Pin Clocking
- **Highest Density Programmable Logic Available in a 24-Pin Package**
- **Increased Logic Flexibility**
42 Array Inputs, 20 Sum Terms and 20 Flip-Flops
- **Enhanced Output Logic Flexibility**
All 20 Flip-Flops Feed Back Internally
10 Flip-Flops are Also Available as Outputs
- **Low Power ATV750BL - 1.0 mA Standby (Typical)**
- **Reprogrammable - 100% Tested for Programming**
- **Full Military, Commercial and Industrial Temperature Ranges**
- **24-Pin, 0.300" DIP, 24-Lead SOIC, and 28-Lead Surface Mount Packages**

**High Speed
UV Erasable
Programmable
Logic Device**

Logic Diagram

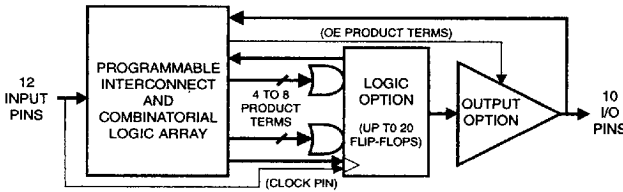

Description



The ATV750Bs are twice as powerful as most other 24-pin programmable logic devices. Increased product terms, sum terms, flip-flops and output logic configurations translate into more usable gates. High speed logic and uniform, predictable delays guarantee fast in-system performance.

Each of the ATV750B's 22 logic pins can be used as an input. Ten of these can be used as inputs, outputs or bi-directional I/O pins. Each flip-flop is individually configurable as either D- or T-type. Each flip-flop output is fed back into the array independently. This allows burying of all the sum terms and flip-flops.

There are 171 total product terms available. A variable format is used to assign between four to eight product terms per sum term. There are two sum terms per output, providing added *(continued on next page)*

Pin Configurations

Pin Name	Function
CLK	Clock
IN	Logic Inputs
I/O	Bidirectional Buffers
*	No Internal Connection
Vcc	+5 V Supply



Description (Continued)

flexibility. Much more logic can be replaced by this device than by any other 24-pin PLD. With 20 sum terms and flip-flops, complex state machines are easily implemented with logic to spare.

Product terms provide individual clocks and asynchronous resets for each flip-flop. Each flip-flop may also be individually configured to have direct input pin controlled clocking. Each output has its own enable product term. One product term provides a common synchronous preset for all flip-flops. Register

preload functions are provided to simplify testing. All registers automatically reset upon power up.

The ATV750BL is a low power device with speeds as fast as 15 ns. The ATV750BL provides the optimum low power PLD solution, with full CMOS output levels. This device significantly reduces total system power, thereby allowing battery-powered operation.

Absolute Maximum Ratings*

Temperature Under Bias.....	-55°C to +125°C
Storage Temperature.....	-65°C to +150°C
Voltage on Any Pin with Respect to Ground.....	-2.0 V to +7.0 V ⁽¹⁾
Voltage on Input Pins with Respect to Ground During Programming.....	-2.0 V to +14.0 V ⁽¹⁾
Programming Voltage with Respect to Ground.....	-2.0 V to +14.0 V ⁽¹⁾
Integrated UV Erase Dose.....	7258 W-sec/cm ²

*NOTICE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.


Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note:


1. Minimum voltage is -0.6 V dc which may undershoot to -2.0 V for pulses of less than 20 ns. Maximum output pin voltage is $V_{CC}+0.75$ V dc which may overshoot to +7.0 V for pulses of less than 20 ns.

Logic Options


Combinatorial Output

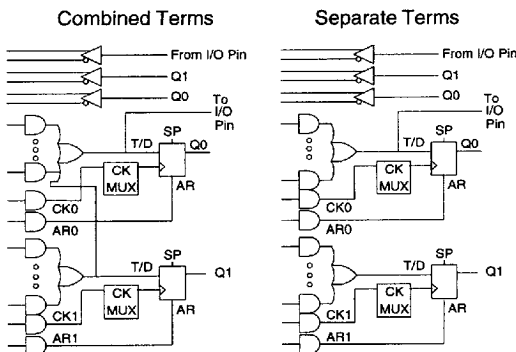

Registered Output


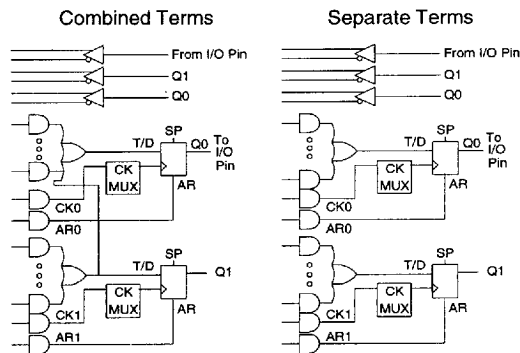


Clock MUX

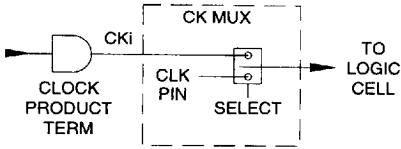

1

Output Options



D.C. and A.C. Operating Conditions ⁽¹⁾

	Commercial -7, -10, -15	Commercial -25	Industrial	Military
Operating Temperature (Case)	0°C - 70°C	0°C - 70°C	-40°C - 85°C	-55°C - 125°C
V _{CC} Power Supply	5 V ± 5%	5 V ± 10%	5 V ± 10%	5 V ± 10%

Note: 1. See ordering information for valid speed and temperature combination.




1074177 0007242 2T9

D.C. Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Units	
I_{LI}	Input Load Current	$V_{IN} = -0.1 \text{ V to } V_{CC}+1 \text{ V}$			10	μA	
I_{LO}	Output Leakage Current	$V_{OUT} = -0.1 \text{ V to } V_{CC}+0.1 \text{ V}$			10	μA	
I_{CC}	Power Supply Current, Standby	$V_{CC} = \text{MAX},$ $V_{IN} = \text{GND or } V_{CC}$ $f = 0 \text{ MHz},$ Outputs Open	ATV750B	Com.		180	mA
				Ind.,Mil.			190
			ATV750BL	Com.	1	4	mA
				Ind.,Mil.	1	5	mA
I_{CC2}	Clocked Power Supply Current	$V_{CC} = \text{MAX},$ $V_{IN} = \text{GND or } V_{CC},$ Outputs Open	ATV750BL	Com.	10	$\text{mA/MHz}^{(2)}$	
				Ind.,Mil.	15	$\text{mA/MHz}^{(2)}$	
$I_{OS}^{(1)}$	Output Short Circuit Current	$V_{OUT} = 0.5 \text{ V}$			-120	mA	
V_{IL}	Input Low Voltage	$4.5 \leq V_{CC} \leq 5.5 \text{ V}$	-0.6		0.8	V	
V_{IH}	Input High Voltage		2.0		$V_{CC}+0.75$	V	
V_{OL}	Output Low Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $V_{CC} = \text{MIN}$	$I_{OL} = 16 \text{ mA Com., Ind.}$		0.5	V	
			$I_{OL} = 12 \text{ mA Mil.}$		0.5	V	
			$I_{OL} = 24 \text{ mA Com.}$		0.8	V	
V_{OH}	Output High Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $V_{CC} = \text{MIN}$	$I_{OH} = -100 \mu\text{A}$	$V_{CC}-0.3$		V	
			$I_{OH} = -4.0 \text{ mA}$	2.4		V	


- Notes: 1. Not more than one output at a time should be shorted. Duration of short circuit test should not exceed 30 sec.
2. See I_{CC} versus frequency characterization curves.

Input Test Waveforms and Measurement Levels




$t_R, t_F < 3 \text{ ns (10\% to 90\%)}$

Output Test Load



A.C. Waveforms, Product Term Clock⁽¹⁾

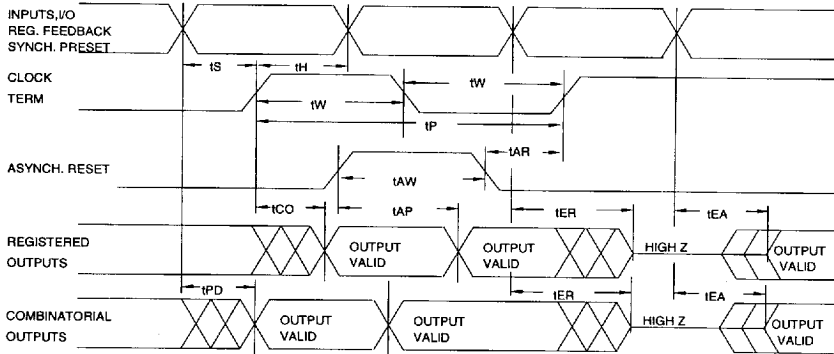

Note: 1. Timing measurement reference is 1.5 V. Input AC driving levels are 0.0 V and 3.0 V, unless otherwise specified.

A.C. Characteristics, Product Term Clock⁽¹⁾


Symbol Parameter		-7		-10		B/BL -15		B/BL -25		Units
		Min	Max	Min	Max	Min	Max	Min	Max	
t _{PD}	Input or Feedback to Non-Registered Output		7.5		10		15		25	ns
t _{EA}	Input to Output Enable		7.5		10		15		25	ns
t _{ER}	Input to Output Disable		7.5		10		15		25	ns
t _{CO}	Clock to Output	3	7.5	4	10	5	14	6	22	ns
t _{CF}	Clock to Feedback	1	5	4	7.5	5	9	5	10	ns
t _S	Input Setup Time	3		4		8/10		12		ns
t _{SF}	Feedback Setup Time	3		4		7		7		ns
t _H	Hold Time	1		2		5/7		5/7		ns
t _P	Clock Period	7		11		14		17		ns
t _W	Clock Width	3.5		5.5		7		8.5		ns
F _{MAX}	External Feedback 1/(t _S +t _{CO})		95		71		45/41		29	MHz
	Internal Feedback 1/(t _{SF} +t _{CF})		125		86		62		58	MHz
	No Feedback 1/(t _P)		142		90		71		58	MHz
t _{AW}	Asynchronous Reset Width	5		10		15		20		ns
t _{AR}	Asynchronous Reset Recovery Time	3		10		15		20		ns
t _{AP}	Asynchronous Reset to Registered Output Reset		8		12		15		25	ns
t _{SP}	Setup Time, Synchronous Preset	4		7		8		15		ns

Note: 1. See ordering information for valid part numbers.



1074177 0007244 071

A.C. Waveforms, Input Pin Clock ⁽¹⁾

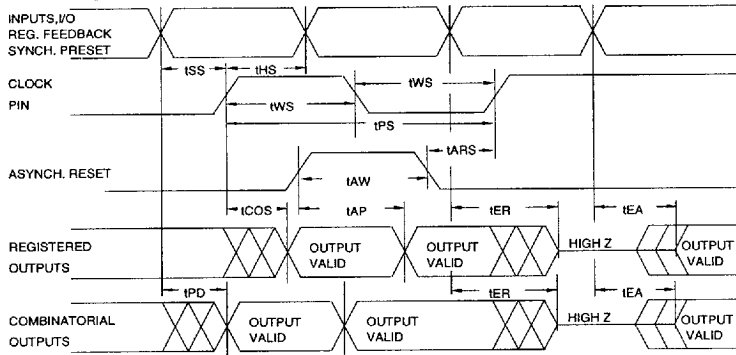


Note: 1. Timing measurement reference is 1.5 V. Input AC driving levels are 0.0 V and 3.0 V, unless otherwise specified.

A.C. Characteristics, Input Pin Clock

Symbol	Parameter	-7		-10		B/BL -15		B/BL -25		Units
		Min	Max	Min	Max	Min	Max	Min	Max	
t _{PD}	Input or Feedback to Non-Registered Output		7.5		10		15		25	ns
t _{EA}	Input to Output Enable		7.5		10		15		25	ns
t _{ER}	Input to Output Disable		7.5		10		15		25	ns
t _{COS}	Clock to Output	0	6.5	0	7	0	9	0	15	ns
t _{CFS}	Clock to Feedback	0	3.5	0	5	0	5.5	0	7	ns
t _{SS}	Input Setup Time	4		5		8/10		9/12		ns
t _{SFS}	Feedback Setup Time	4		5		7		9		ns
t _{HS}	Hold Time	0		0		0		0		ns
t _{PS}	Clock Period		7		10		12		16	ns
t _{WS}	Clock Width		3.5		5		6		8	ns
F _{MAXS}	External Feedback 1/(t _{SS} +t _{COS})		95		83		58/52		41/37	MHz
	Internal Feedback 1/(t _{SFS} +t _{CFS})		133		100		80		62	MHz
	No Feedback 1/(t _{PS})		142		100		83		62	MHz
t _{AW}	Asynchronous Reset Width	5		10		15		20		ns
t _{ARS}	Asynchronous Reset Recovery Time	5		10		15		25		ns
t _{AP}	Asynchronous Reset to Registered Output Reset		8		10		15		25	ns
t _{SPS}	Setup Time, Synchronous Preset	5		5/9		11		15		ns

Functional Logic Diagram ATV750B, Upper Half

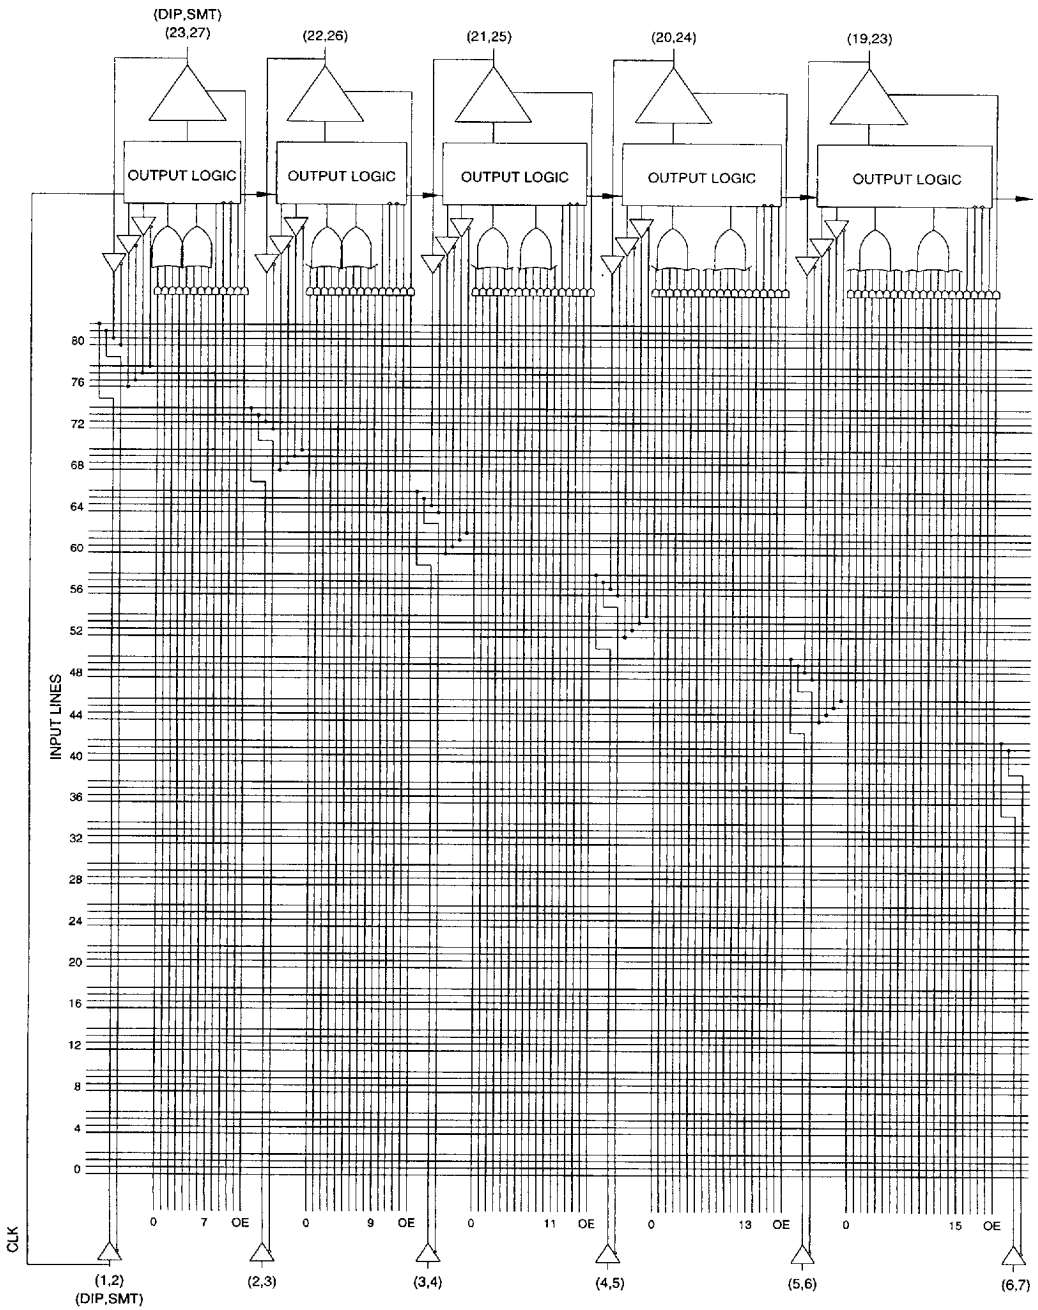


1



1074177 0007246 944



Functional Logic Diagram ATV750B, Lower Half

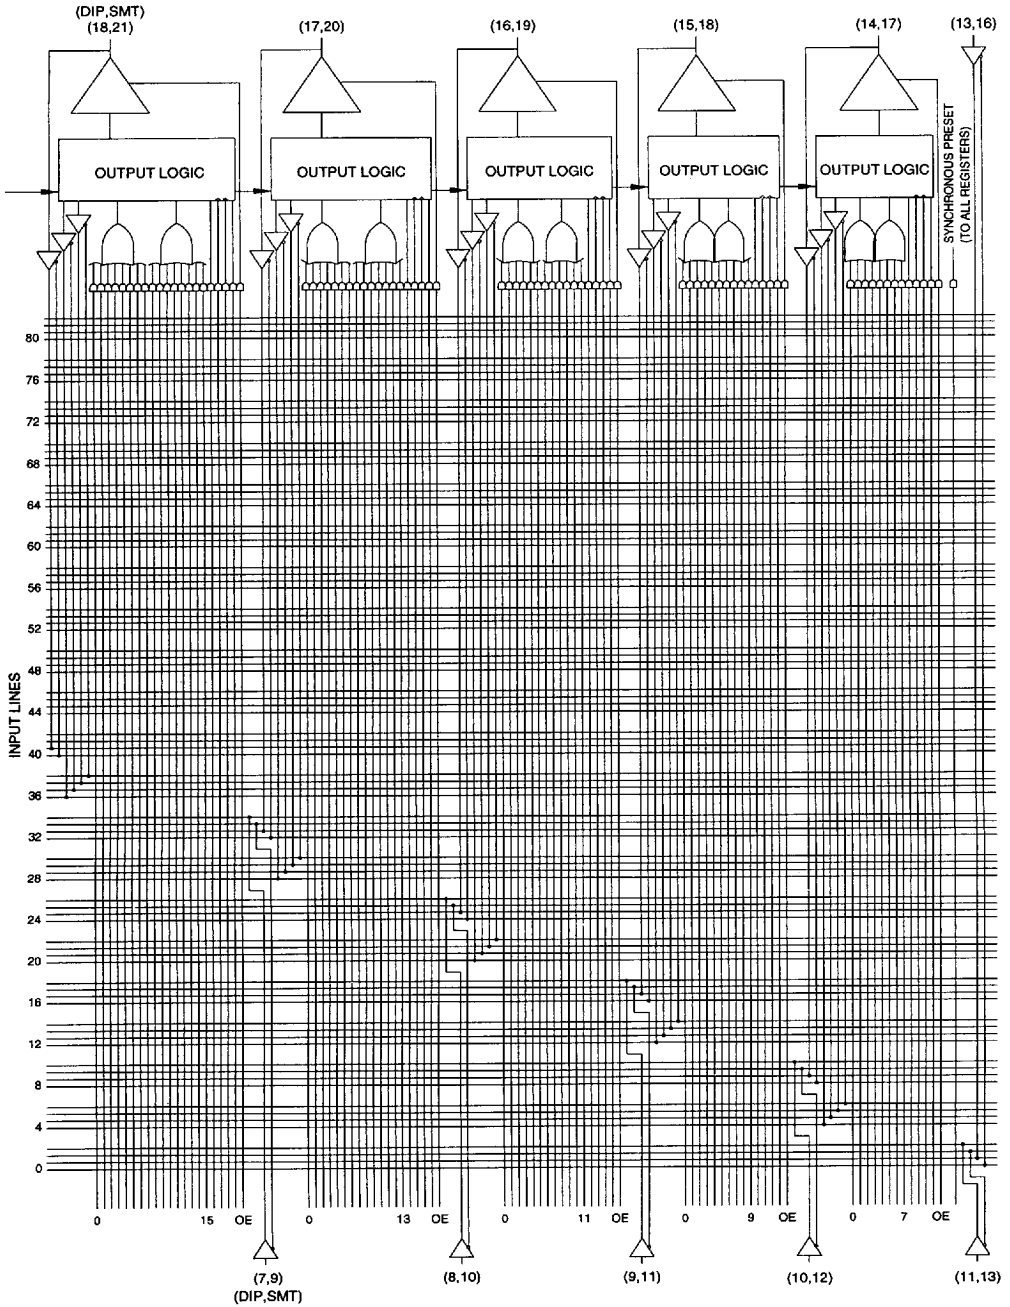

1-120


ATV750B/BL

■ 1074177 0007247 880 ■

Preload of Registered Outputs

The ATV750B's registers are provided with circuitry to allow loading of each register asynchronously with either a high or a low. This feature will simplify testing since any state can be forced into the registers to control test sequencing. A V_{IH} level on the I/O pin will force the register high; a V_{IL} will force it low,

independent of the output polarity. The PRELOAD state is entered by placing a 10.25 V to 10.75 V signal on pin 8 on DIPs, and lead 10 on SMDs. When the clock term is pulsed high, the data on the I/O pins is placed into the register chosen by the Select Pin.

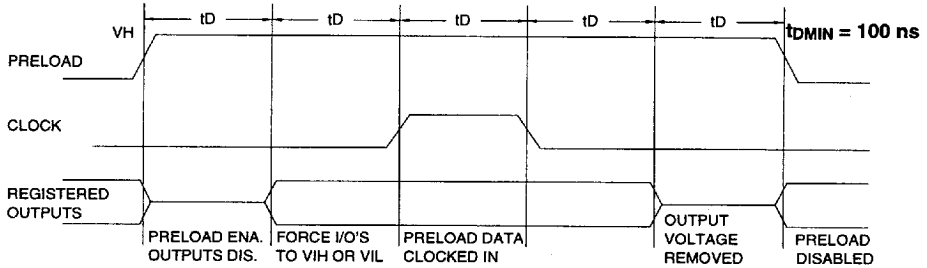


Level forced on registered output pin during PRELOAD cycle	Select Pin State	Register #0 state after cycle	Register #1 State after cycle
V_{IH}	Low	High	X
V_{IL}	Low	Low	X
V_{IH}	High	X	High
V_{IL}	High	X	Low

Power Up Reset

The registers in the ATV750Bs are designed to reset during power up. At a point delayed slightly from V_{CC} crossing V_{RST} , all registers will be reset to the low state. The output state will depend on the polarity of the output buffer.

This feature is critical for state machine initialization. However, due to the asynchronous nature of reset and the uncertainty of how V_{CC} actually rises in the system, the following conditions are required:

- 1) The V_{CC} rise must be monotonic,
- 2) After reset occurs, all input and feedback setup times must be met before driving the clock term high, and
- 3) The signals from which the clock is derived must remain stable during t_{PR} .

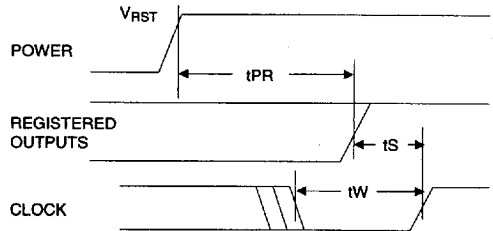

Parameter	Description	Typ	Max	Units
t_{PR}	Power-Up Reset Time	600	1000	ns
V_{RST}	Power-Up Reset Voltage	3.8	4.5	V

Pin Capacitance (f = 1 MHz, T = 25°C) ⁽¹⁾

	Typ	Max	Units	Conditions
C_{IN}	5	8	pF	$V_{IN} = 0 V$
C_{OUT}	6	8	pF	$V_{OUT} = 0 V$

Note: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.



Using the ATV750B's Many Advanced Features

The ATV750B's advanced flexibility packs more usable gates into 24 pins than any other logic device. The ATV750Bs start with the popular 22V10 architecture, and add several enhanced features:

- **Selectable D- and T-Type Registers** - Each ATV750B flip-flop can be individually configured as either D- or T-type. Using the T-type configuration, JK and SR flip-flops are also easily created. These options allow more efficient product term usage.
- **Selectable Asynchronous Clocks** - Each of the ATV750B's flip-flops may be clocked by its own clock product term or directly from Pin 1 (SMD Lead 2). This removes the constraint that all registers must use the same clock. Buried state machines, counters and registers can all coexist in one device while running on separate clocks. Individual flip-flop clock source selection further allows mixing higher performance pin clocking and flexible product term clocking within one design.
- **A Full Bank of Ten More Registers** - The ATV750B provides two flip-flops per output logic cell for a total of 20. Each register has its own sum term, its own reset term and its own clock term.
- **Independent I/O Pin and Feedback Paths** - Each I/O pin on the ATV750B has a dedicated input path. Each of the 20 registers has its own feedback terms into the array as well. This feature, combined with individual product terms for each I/O's output enable, facilitates true bi-directional I/O design.

Programming Software Support

As with all other Atmel PLDs, several third party development software products support the ATV750Bs. Several third party programmers support the ATV750B as well. Additionally, the ATV750B may be programmed to perform the ATV750L's functional subset (no T-type flip-flops or pin clocking) using the ATV750L JEDEC file. In this case, the ATV750B becomes a direct replacement or speed upgrade for the ATV750L. The ATV750L programming algorithm is different from the ATV750B/BL algorithm. Choose the appropriate device in your programmer menu to ensure proper programming. Please refer to the *Programmable Logic Development Tools* section for a complete PLD software and programmer listing.

Synchronous Preset and Asynchronous Reset

One synchronous preset line is provided for all 20 registers in the ATV750B. The appropriate input signals to cause the internal clocks to go to a high state must be received during a synchronous preset. Appropriate setup and hold times must be met, as shown in the switching waveform diagram.

An individual asynchronous reset line is provided for each of the 20 flip-flops. Both master and slave halves of the flip-flops are reset when the input signals received force the internal resets high.

Security Fuse Usage

A single fuse is provided to prevent unauthorized copying of the ATV750B fuse patterns. Once the security fuse is programmed, all fuses will appear programmed during verify.

The security fuse should be programmed last, as its effect is immediate.

Erase Characteristics


The entire memory array of an ATV750B is erased after exposure to ultraviolet light at a wavelength of 2537 Å. Complete erasure is assured after a minimum of 20 minutes exposure using 12,000 $\mu\text{W}/\text{cm}^2$ intensity lamps spaced one inch away from the chip. Minimum erase time for lamps at other intensity ratings can be calculated from the minimum integrated erasure dose of 15 $\text{W}\cdot\text{sec}/\text{cm}^2$. To prevent unintentional erasure, an opaque label is recommended to cover the clear window on any UV erasable PLD which will be subjected to continuous fluorescent indoor lighting or sunlight.

Atmel CMOS PLDs


The ATV750B utilizes an advanced 0.65-micron CMOS EPROM technology. This technology's state of the art features are the optimum combination for PLDs:

- CMOS technology provides high speed, low power, and high noise immunity.
- EPROM technology is the most cost effective method for producing PLDs - surpassing bipolar fusible link technology in low cost, while providing the necessary reprogrammability.
- EPROM reprogrammability, which is 100% tested before shipment, provides inherently better programmability and reliability than one-time fusible PLDs.


SUPPLY CURRENT vs. INPUT FREQUENCY
ATV750B (TA = 25C, VCC = 5V)

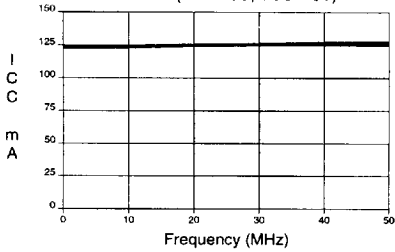


SUPPLY CURRENT vs. INPUT FREQUENCY
ATV750BL (TA = 25C, VCC = 5V)

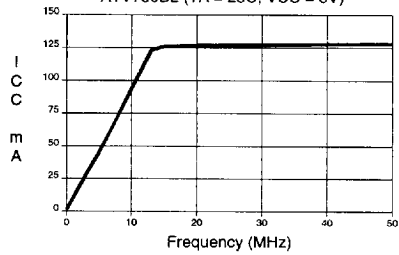


NORMALIZED SUPPLY CURRENT vs. SUPPLY VOLTAGE

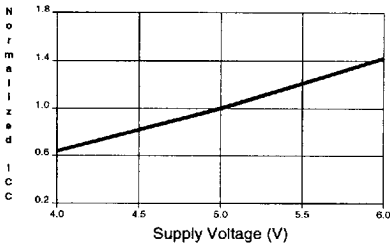


NORMALIZED ICC vs. AMBIENT TEMP.
f = 50 MHz

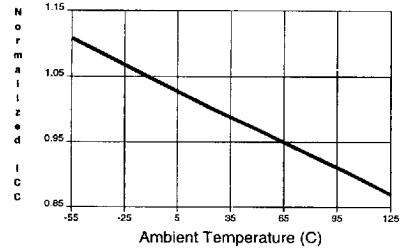


OUTPUT SINK CURRENT vs. SUPPLY VOLTAGE (VOL = 0.5V)

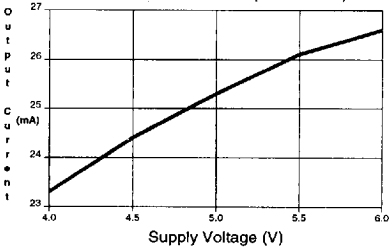


OUTPUT SINK CURRENT vs. OUTPUT VOLTAGE (TA = 25C, VCC = 5V)

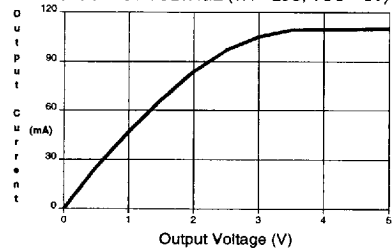

OUTPUT SOURCE CURRENT vs. SUPPLY VOLTAGE (VOH = 2.4V)

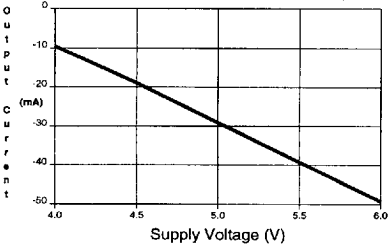


OUTPUT SOURCE CURRENT vs. OUTPUT VOLTAGE (TA = 25C, VCC = 5V)

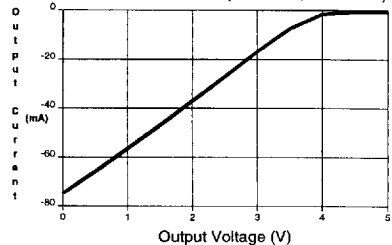


1074177 0007250 375

1


**NORMALIZED TPD
vs. SUPPLY VOLTAGE**

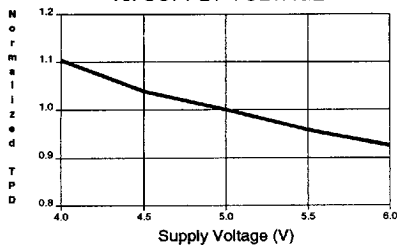


**NORMALIZED TPD
vs. TEMPERATURE**

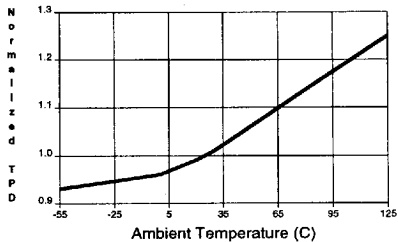


**NORMALIZED TCO
vs. SUPPLY VOLTAGE**

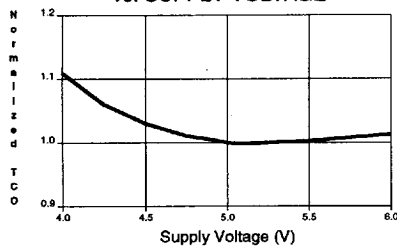


**NORMALIZED TCO
vs. TEMPERATURE**

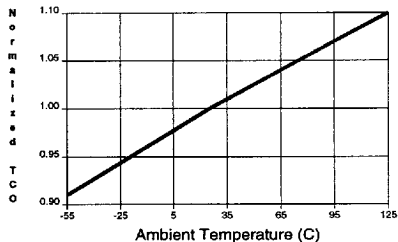


**NORMALIZED TS
vs. SUPPLY VOLTAGE**

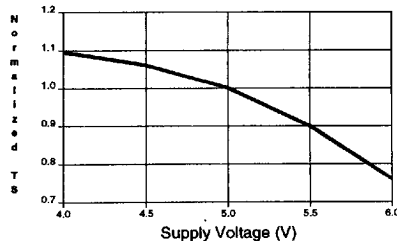


**NORMALIZED TS
vs. TEMPERATURE**

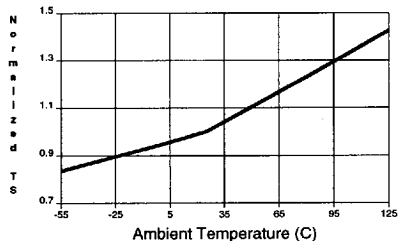

**DELTA TPD vs. OUTPUT LOADING
(VCC = 4.5V, OUTPUT LOAD = COMMERCIAL)**

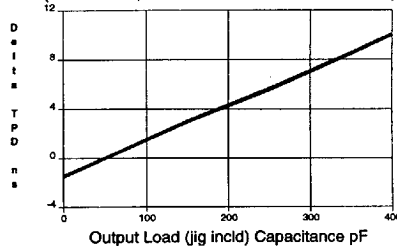

**DELTA TCO vs. OUTPUT LOADING
(VCC = 4.5V, OUTPUT LOAD = COMMERCIAL)**

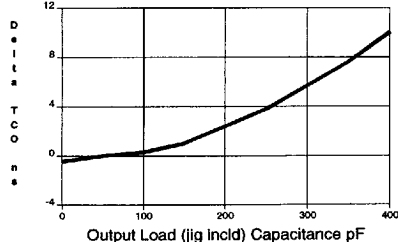

Ordering Information

tpd (ns)	tcos (ns)	Ext. fMAXS (MHz)	Ordering Code	Package	Operation Range
7.5	6.5	95	ATV750B-7DC	24DW3	Commercial (0°C to 70°C)
			ATV750B-7JC ATV750B-7PC	28J 24P3	
10	7	83	ATV750B-10DC	24DW3	Commercial (0°C to 70°C)
			ATV750B-10JC ATV750B-10KC ATV750B-10PC ATV750B-10SC	28J 28KW 24P3 24S	
			ATV750B-10DI ATV750B-10JI ATV750B-10KI ATV750B-10PI ATV750B-10SI	24DW3 28J 28KW 24P3 24S	Industrial (-40°C to 85°C)
			ATV750B-10DM ATV750B-10KM ATV750B-10LM	24DW3 28KW 28LW	Military (-55°C to 125°C)
15	10	58	ATV750B-15DC	24DW3	Commercial (0°C to 70°C)
			ATV750B-15JC ATV750B-15KC ATV750B-15PC ATV750B-15SC	28J 28KW 24P3 24S	
			ATV750B-15DI ATV750B-15JI ATV750B-15KI ATV750B-15PI ATV750B-15SI	24DW3 28J 28KW 24P3 24S	Industrial (-40°C to 85°C)
			ATV750B-15DM ATV750B-15KM ATV750B-15LM	24DW3 28KW 28LW	Military (-55°C to 125°C)
25	15	41	ATV750B-15DM/883 ATV750B-15KM/883 ATV750B-15LM/883	24DW3 28KW 28LW	Military/883C (-55°C to 125°C) Class B, Fully Compliant
			ATV750B-25DC	24DW3	Commercial (0°C to 70°C)
			ATV750B-25JC ATV750B-25KC ATV750B-25PC ATV750B-25SC	28J 28KW 24P3 24S	
			ATV750B-25DI ATV750B-25JI ATV750B-25KI ATV750B-25PI ATV750B-25SI	24DW3 28J 28KW 24P3 24S	Industrial (-40°C to 85°C)

1



1074177 0007252 148



Ordering Information

t _{PD} (ns)	t _{CO5} (ns)	Ext. f _{MAXS} (MHz)	Ordering Code	Package	Operation Range
10	7	83	5962-88726 08 LX 5962-88726 08 3X 5962-88726 08 YX	24DW3 28LW 28KW	Military/883C (-55°C to 125°C) Class B, Fully Compliant
15	9	58	5962-88726 09 LX 5962-88726 09 3X 5962-88726 09 YX	24DW3 28LW 28KW	Military/883C (-55°C to 125°C) Class B, Fully Compliant
25	15	41	5962-88726 10 LX 5962-88726 10 3X 5962-88726 10 YX	24DW3 28LW 28KW	Military/883C (-55°C to 125°C) Class B, Fully Compliant

1-126

ATV750B/BL

■ 1074177 0007253 084 ■

Ordering Information

tpd (ns)	tcos (ns)	Ext. fMAXS (MHz)	Ordering Code	Package	Operation Range
15	9	92	ATV750BL-15DC ATV750BL-15JC ATV750BL-15KC ATV750BL-15PC ATV750BL-15SC	24DW3 28J 28KW 24P3 24S	Commercial (0°C to 70°C)
			ATV750BL-15DI ATV750BL-15JI ATV750BL-15KI ATV750BL-15PI ATV750BL-15SI	24DW3 28J 28KW 24P3 24S	Industrial (-40°C to 85°C)
			ATV750BL-15DM ATV750BL-15KM ATV750BL-15LM	24DW3 28KW 28LW	Military (-55°C to 125°C)
			ATV750BL-15DM/883 ATV750BL-15KM/883 ATV750BL-15LM/883	24DW3 28KW 28LW	Military/883C (-55°C to 125°C) Class B, Fully Compliant
25	15	37	ATV750BL-25DC ATV750BL-25JC ATV750BL-25KC ATV750BL-25PC ATV750BL-25SC	24DW3 28J 28KW 24P3 24S	Commercial (0°C to 70°C)
			ATV750BL-25DI ATV750BL-25JI ATV750BL-25KI ATV750BL-25PI ATV750BL-25SI	24DW3 28J 28KW 24P3 24S	Industrial (-40°C to 85°C)
15	9	92	5962-88726 11 LX 5962-88726 11 3X 5962-88726 11 YX	24DW3 28LW 28KW	Military/883C (-55°C to 125°C) Class B, Fully Compliant
25	15	37	5962-88726 12 LX 5962-88726 12 3X 5962-88726 12 YX	24DW3 28LW 28KW	Military/883C (-55°C to 125°C) Class B, Fully Compliant

Package Type

24DW3	24 Lead, 0.300" Wide, Windowed, Ceramic Dual Inline Package (Cerdip)
28J	28 Lead, Plastic J-Leaded Chip Carrier OTP (PLCC)
28KW	28 Lead, Windowed, Ceramic J-Leaded Chip Carrier (JLCC)
28LW	28 Pad, Windowed, Ceramic Leadless Chip Carrier (LCC)
24P3	24 Lead, 0.300" Wide, Plastic Dual Inline Package OTP (PDIP)
24S	24 Lead, 0.300" Wide, Plastic Gull Wing Small Outline OTP (SOIC)

1074177 0007254 T10



1-127