

CRYSTAL CLOCK OSCILLATORS
LQT Series

■ How to Order

LQT- X-

(1) (2) (3)

- (1) Model name
(2) Representative frequency
(3) Number of output

■ Specifications

Feature	Name of Product		LQT-50X-3	LQT-60X-3	LQT-64X	LQT-100X	LQT-1KX	LQT-10KX	LQT-100KX
PIN No.	1	OUT (50Hz)	OUT (60Hz)	OUT (256Hz)	OUT (200Hz)	OUT (500Hz)	OUT (10KHz)	OUT (12.5KHz)	
	2	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)	V _{DD} (+5.0V)
	3	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)	V _{SS} (GND)
	4	RESET	RESET	RESET	RESET	OUT (4KHz)	OUT (80KHz)	OUT (100KHz)	
	5	OUT (12.5Hz)	OUT (16Hz)	OUT (64Hz)	OUT (50Hz)	OUT (2KHz)	OUT (40KHz)	OUT (50KHz)	
	6	OUT (25Hz)	OUT (30Hz)	OUT (128Hz)	OUT (100Hz)	OUT (1KHz)	OUT (20KHz)	OUT (25KHz)	
Voltage (in Operation)		5.0V(4.5 to 5.5V)					5.0V(4.5 to 5.5V)		
Output Frequency		12.5, 25, 50Hz	15, 30, 60Hz	64, 128, 256Hz	50, 100, 200Hz	500, 1K, 2K4KHz	10K, 20K40K, 80KHz	12.5K, 25K50K, 100KHz	
Current Consumption (at no load)		1.5mA max					1.5mA max		
Operating temperature range		-20°C to +70°C					-20°C to +70°C		
Frequency precision (25°C ±2°C, 5V)	0	10ppm							
	1	50ppm							
	2	110ppm							
	3	0.2%							
Frequency Variation Rate	Voltage Characteristic	±0.5ppm/0.1V TYPICAL					±0.5ppm/0.1V TYPICAL		
	Temperature Characteristic	±20ppm (-10°C to +60°C)					±20ppm (-10°C to +60°C)		
RESET		YES					NO		
Output From		C-MOS INVERTER					C-MOS INVERTER		
Output Wave Shape		Rectangular wave 50% duty					Rectangular wave 50% duty		
Case		NO CONNECTION					NO CONNECTION		

Adjustment to frequencies other than the standard types above is possible upon request.

■ Characteristics

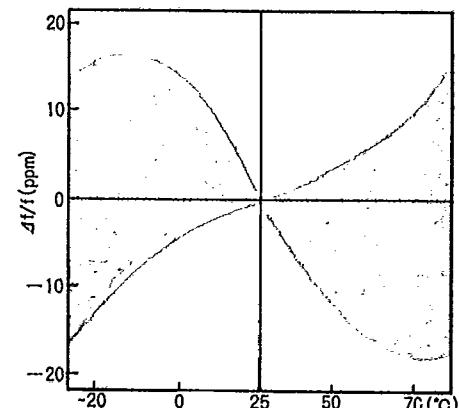


Fig. 1 Temperature - Oscillation Frequency Variation

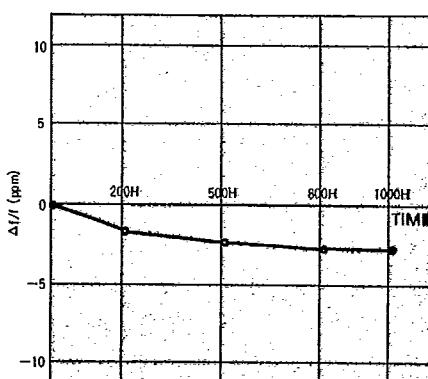


Fig. 2 High Temperature Exposure (85°C)

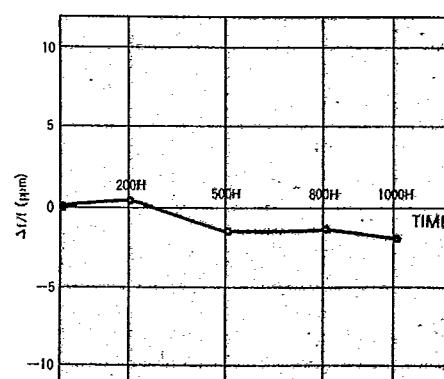


Fig. 3 Low Temperature Exposure (-40°C)

CRYSTAL CLOCK OSCILLATORS
LQT Series

TBM LQT50X-1, 60X-1 are high-precision crystal oscillators composed of AT-cut crystal with excellent temperature features and low-energy, high-drive CMOS IC.

Existing power synchronization system can be revised into a high-precision crystal synchronization system with little effort, realizing improved sophistication, reliability, and global application of the system.



In particular, it has been simplified for output only of power frequencies most frequently used for high precision, high reliability, and low cost.

■ Features

- 1) Revision of the oscillator to the power supply sync system produces high-precision quartz synchronization.
- 2) The simple function (at 50 Hz or 60 Hz) realized low price and high precision.
- 3) Use of CMOS IC produces high output (TTL one-gate drive possible) at low energy consumption (5.0V 0.5mA at maximum).
- 4) The metal package makes it easy to prevent radiation of unwanted oscillation output, and maintains high reliability.

■ Applications

- 1) Quartz synchronization for power synchronization equipment
- 2) Oscillation for various high-precision timers
- 3) Oscillation for high-precision clocks

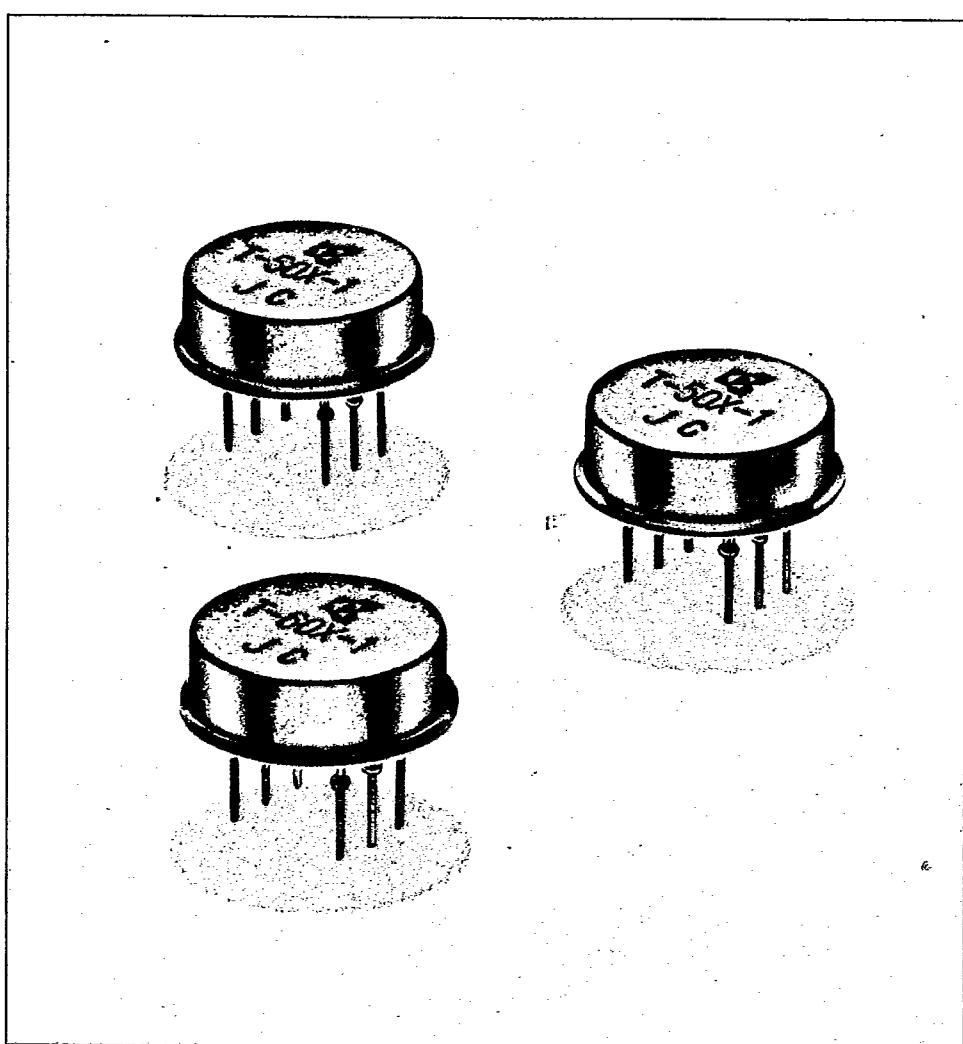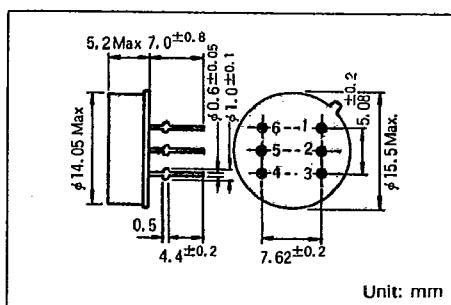
■ Dimensions & Pin Distribution

■ Pin Connection

PIN No.	1	OUT 50Hz
	2	V _{cc}
	3	V _{ss}
	4	NO CONNECTION
	5	NO CONNECTION
	6	NO CONNECTION
	Case	NO CONNECTION

■ How to Order

LQT - 50 X - 1

(1) (2) (3)

- ① Model name
- ② Output frequency (50Hz or 60Hz)
- ③ Number of output

■ Maximum Absolute Rating

Classification	Code	Rating	Unit
Voltage	V _{CC}	-0.3 to +7.0	V
Operation Temperature	T _{OPR}	-20 to +70	°C
Storage Temperature	T _{STG}	-40 to +90	°C

■ Specifications

Classification	Code	Rating	Unit	Remarks
Output Frequency	f _{OUT}	50 or 60	Hz	Cosine Wave 50% Duty
Output Frequency Error	Δf/f (25°C)	0 : ±10	ppm	
		1 : ±50	ppm	
		2 : ±100	ppm	
		3 : ±0.2	%	
Frequency Temperature Characteristic	Δf/f (T)	±20Max	ppm	-10°C--+60°C range based on Ta=25°C, V _{CC} =5.0V
Voltage Characteristic	Δf/f (V _{CC})	±2 Typical	ppm/V	
Range of Temperature in Operation	T _{OPR}	-20 to +70	°C	
Range of Voltage	V _{CC}	+5.0±0.5	V	DC
Current Consumption (at no load)	I _{CC}	0.5Max	mA	
Output Current	I _{OH}	-1.6Min	mA	V _{CC} =5.0V, V _{OL} =AT3.8V
	I _{OL}	1.6Min	mA	V _{CC} =5.0V, V _{OL} =AT0.4V
Fan Out	n	TTL 1 Gate		

■ Comparative Study of LQT-50X-1 and 60X-1 with LQT-50X-3 and 60X-3

		LQT-50X-1, 60X-1	LQT-60X-3, 60X-3	Unit
I _{OL} (0.4V)	Allowance Value (Minimum)	1.6	0.5	mA
	Actual Value	6.2	1.4	mA
I _{OH} (3.8V)	Allowance Value (Minimum)	-1.6	-0.5	mA
	Actual Value	-12.0	-0.6	mA
Current Consumption (at no load)	Maximum	0.5	1.5	mA
	Actual Value	0.2	0.9	mA
Voltage (V _{st}) at Oscillation Start		2.8	4.0	V
Voltage Characteristic		±2 Typical	±5 Typical	ppm/V

■ Test Circuit

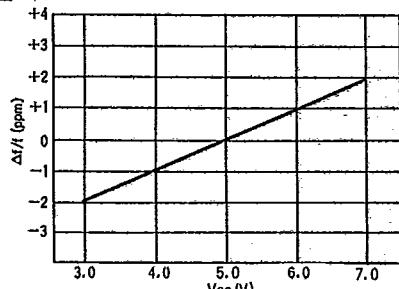


Fig. 4 Voltage - Example of Oscillation Frequency Variation Characteristic (Ta = 25°C)

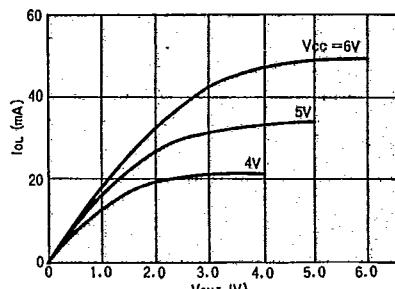


Fig. 6 Example of V_{OUT} Characteristic (Ta = 25°C)

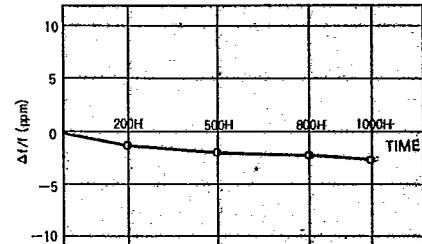


Fig. 8 High Temperature Exposure

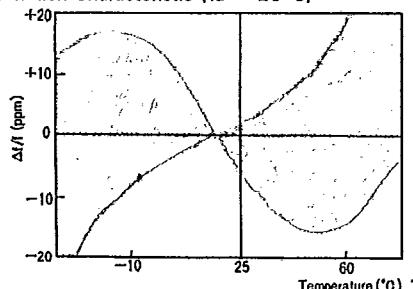


Fig. 5 Temperature - Oscillation Frequency Variation Characteristic (Vdd = 5.0V)

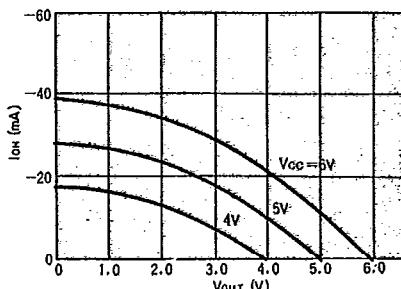


Fig. 7 Example of I_{OH} - V_{OUT} Characteristic (Ta = 25°C)

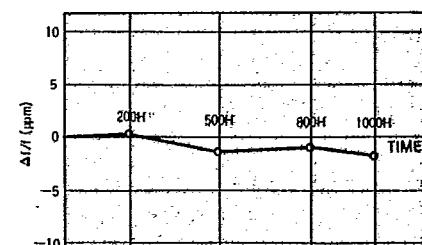


Fig. 9 Low Temperature Exposure Characteristic (Ta = 25°C)