

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
AR	35				O	RLSE PER NPR 3149	7-11-90	FMH
					A	REVISED PER ECN BD4491	11-15-90	FMH
					B	REV PER ECN BD4933	4-18-91	FMH
					C	REV PER EC 0020-53-94	04/27/94	DK
					D	REV PER EC 0020-1023-95	21 SEP 95	KD

- △

FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; BLACK.
- △

2.54μm [.000100] MIN BRIGHT TIN-LEAD ON TERMINATION END, 0.76μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27μm [.000050] MIN NICKEL.
- △

NO SLOT ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- △

NO SLOT FOR SNAP-IN POLARIZER ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
5. FOR MILITARY POLARIZATION, ORDER SNAP-IN POLARIZER 499991-2 (BULK PACK OF 50).
- △


POSITION NO 1 INDICATOR.
- △

COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- △

FOR LATCHES ORDER 111451, 2 PER ASSEMBLY.
- △


PHOSPHOR BRONZE PER QQ-B-750.
- △

STRAIN RELIEF 111547 MUST BE ORDERED SEPARATELY.

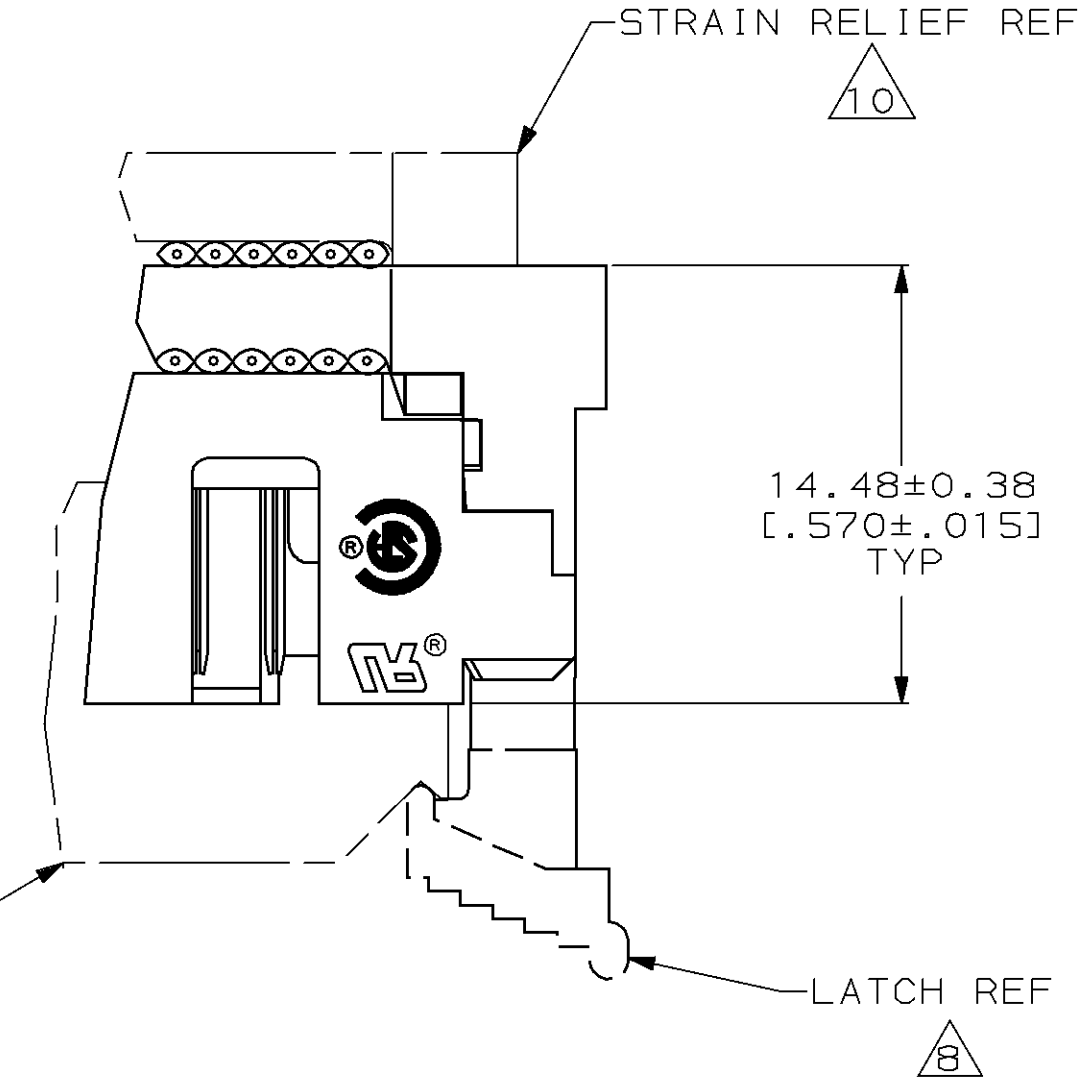


TERMINATED ASSEMBLY
(ASSEMBLED BY CUSTOMER)

95.81 [3.772]	86.21 [3.394]	39.37 [1.550]	31	63	64	1-111446-3
89.59 [3.527]	81.13 [3.194]	36.83 [1.450]	29	59	60	1-111446-2
78.03 [3.072]	68.43 [2.694]	30.48 [1.200]	24	49	50	1-111446-1
70.41 [2.772]	60.81 [2.394]	26.67 [1.050]	21	43	44	1-111446-0
65.33 [2.572]	55.73 [2.194]	24.13 [.950]	19	39	40	111446-9
57.71 [2.272]	48.11 [1.894]	20.32 [.800]	16	33	34	111446-8
52.63 [2.072]	43.03 [1.694]	17.78 [.700]	14	29	30	111446-7
47.55 [1.872]	37.95 [1.494]	15.24 [.600]	12	25	26	111446-6
45.01 [1.772]	35.41 [1.394]	13.97 [.550]	11	23	24	111446-5
39.93 [1.572]	30.33 [1.194]	11.43 [.450]	9	19	20	111446-4
34.85 [1.372]	25.25 [.994]	8.89 [.350]	7	15	16	111446-3
32.31 [1.272]	22.71 [.894]	7.62 [.300]	6	13	14	111446-2
27.230 [1.072]	17.63 [.694]	5.08 [.200]	4	9	10	111446-1
E	D	C	B	A	NO OF POSN	PART NUMBER

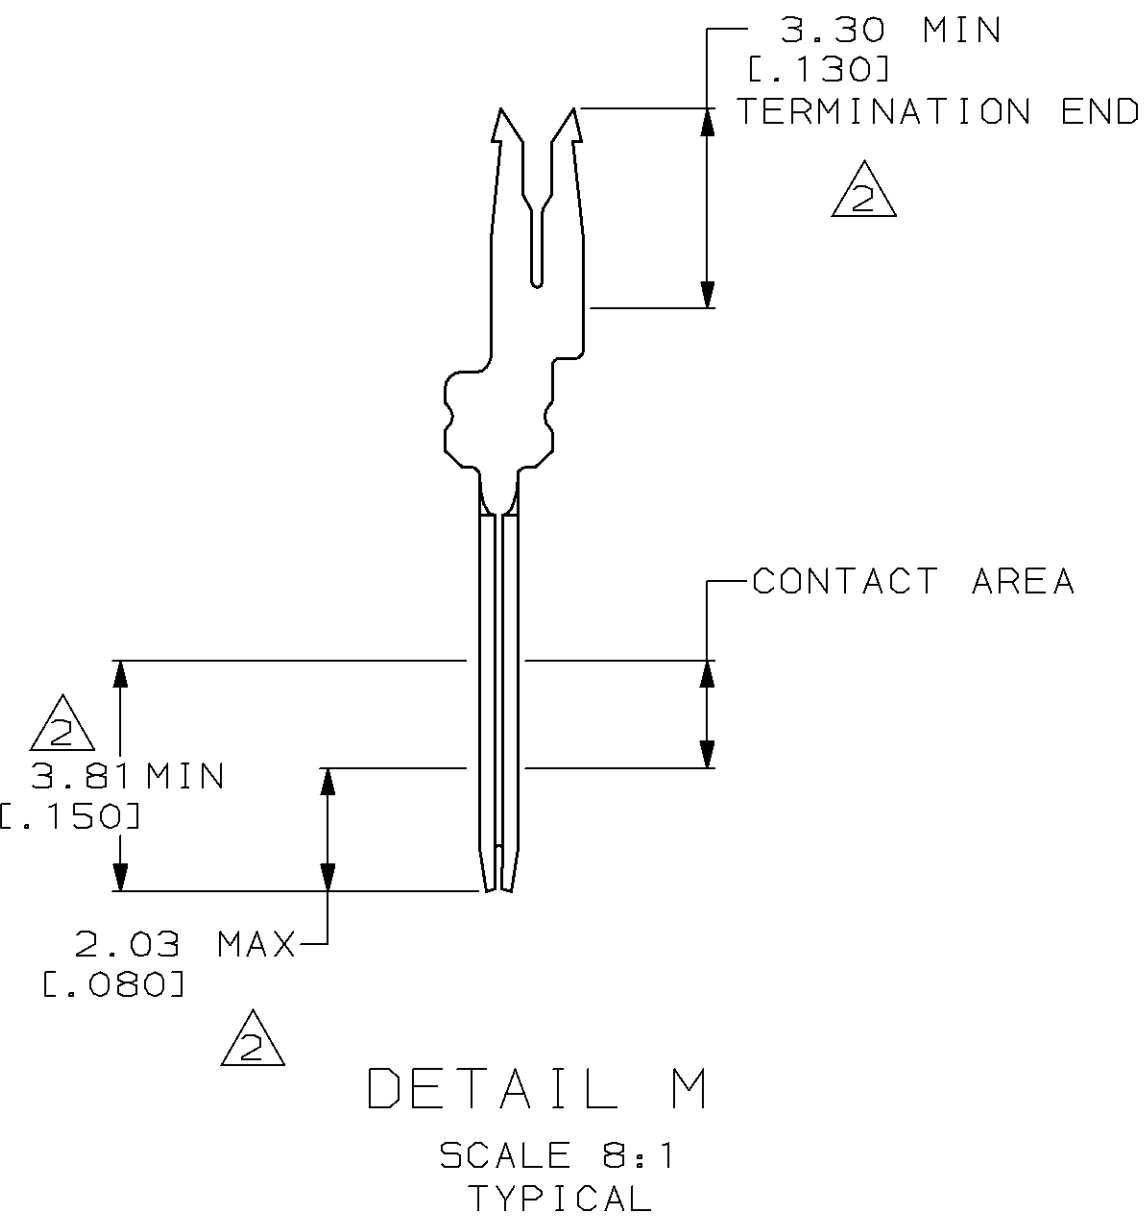

DETAIL M
SCALE 8:1
TYPICAL

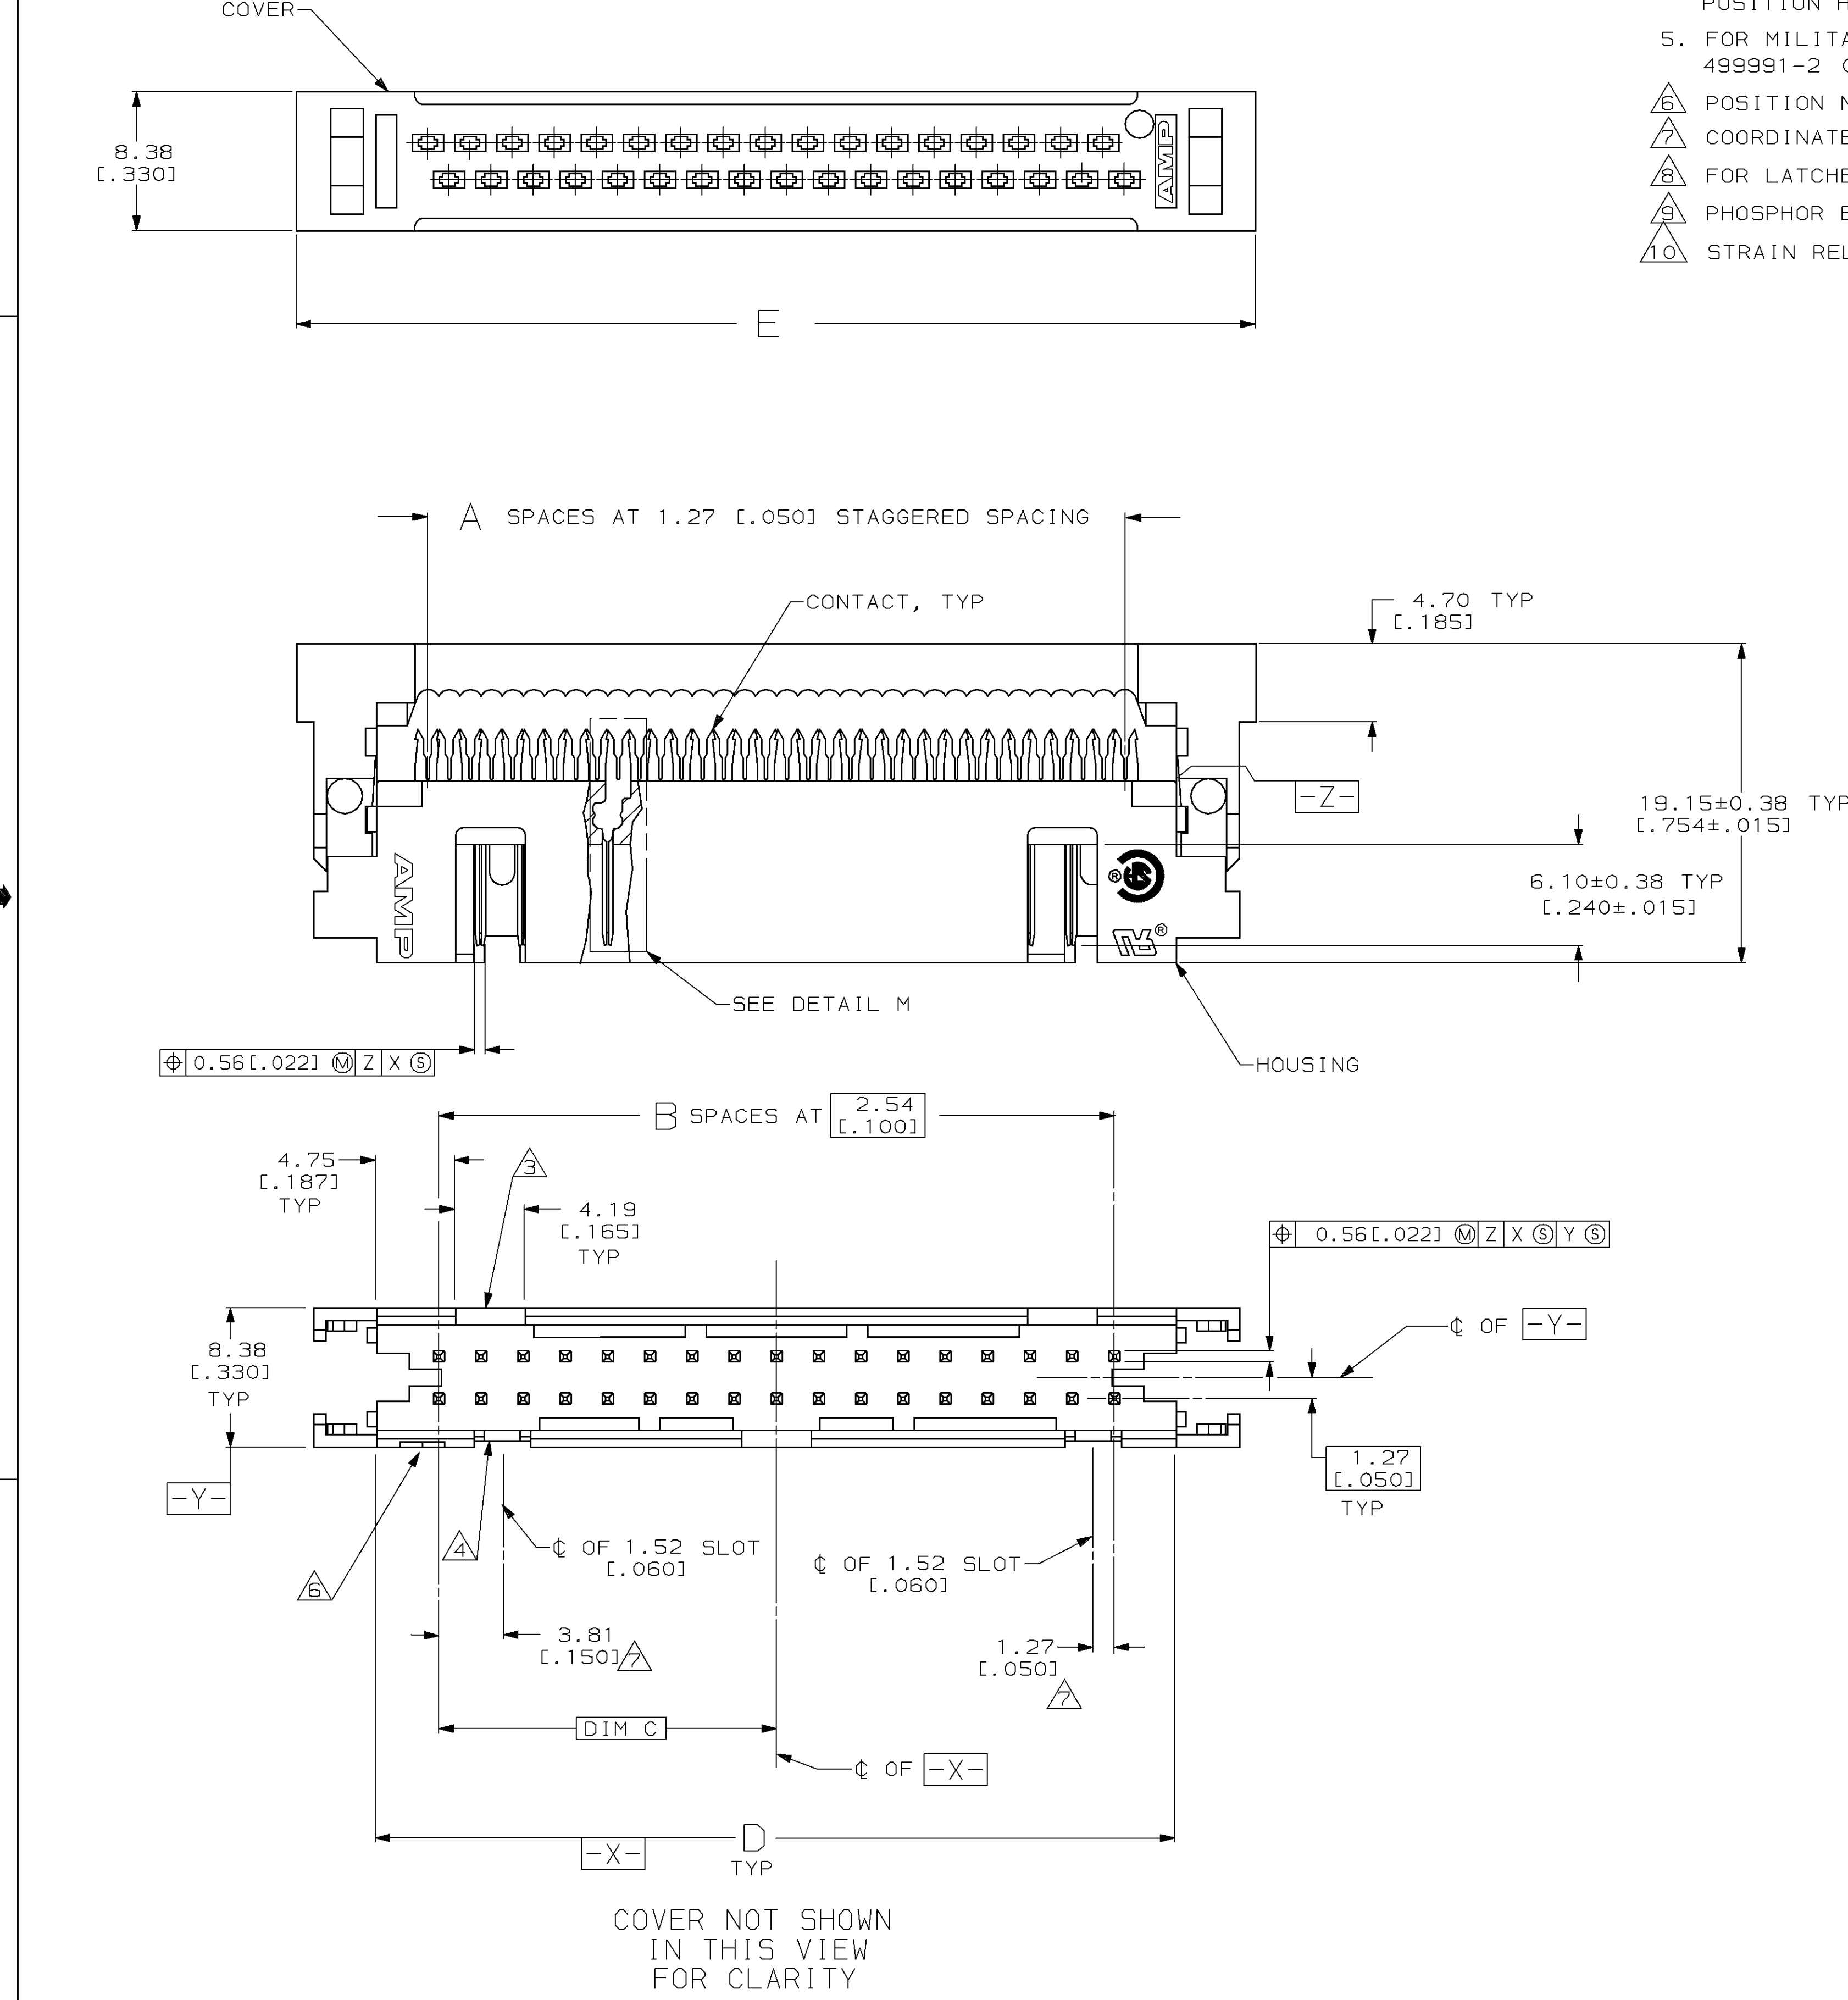

			PART NO				
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13[.005] 3 PLC DEC ± - ANGLES ± - MATERIAL HOUSING & COVER: 		DR 7-11-90 H MOLL				 AMP INCORPORATED Harrisburg, Pa. 17105	
		CHK 8-1-90 F.M.HEINEY					
		APPD 8-2-90 D.HOFFMAN		NAME		UNIV I/O PIN CONN, WITHOUT MOUNTING EARS, AMP-LATCH™	
		APPD 8-3-90 D.HOFFMAN					
PRODUCT SPEC 108-1336							
CONTACTS: 		APPLICATION SPEC 114-7011		SIZE 	CAGE CODE 00779	DRAWING NO 111446	
FINISH CONTACTS: 		WEIGHT -		SCALE 4:1		SHEET 1 OF 1	