■ ISDN standard

■ Industry standard footprint and height

Reference Information

Product Specification: PS-95122

Packaging: Tray

Mates With: FCC 68 plugs Designed In: Millimeters Electrical

Voltage: 125V Current: 1.5A

Contact Resistance: 20mΩ max.
Dielectric Withstanding Voltage: 1000V
Insulation Resistance: 500 MΩ min.
Shielding Effectiveness: 20 dB min.

Physical

Housing: Black polyester, UL 94V-0 Contact: Phosphor Bronze

Plating: Post plate 1.27 to 1.52µm (50 to 60µ") Gold in contact area, 1.90µm (75µ") min. (90/10) Tin/Lead in tail area both over Nickel overall


Operating Temperature: -40 to +80°C




Modular Jack

95123

Vertical, Standard Profile Shielded



CATALOG DRAWING (FOR REFERENCE ONLY)

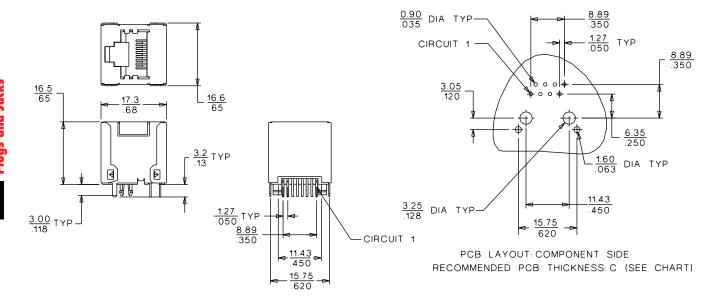

ORDERING INFORMATION AND DIMENSIONS

Circuits	Loaded Contacts	Order No.	Key	Dimension C
8	8	95123-2881	No	1.57 (.059)

0-44 MX01