

FC Series

Features


- Enables surface mounting.
- High rated voltage of 5.5V.
- High reliability solution leakage.

Applications


- Subsidiary power supply.
Buck up power supply line.
Memory backup during battery exchange.

www.DataSheet4U.com


Dimensions

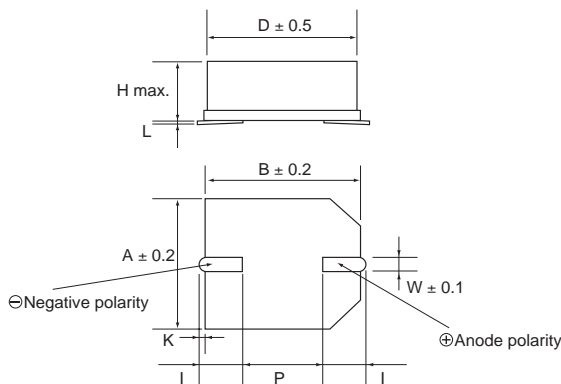

Markings

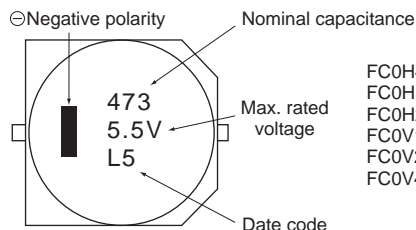

FC0H473ZTBR24
FC0H104ZTBR24
FC0H224ZTBR24
FC0V104ZTBR24
FC0V224ZTBR24
FC0V474ZTBR24

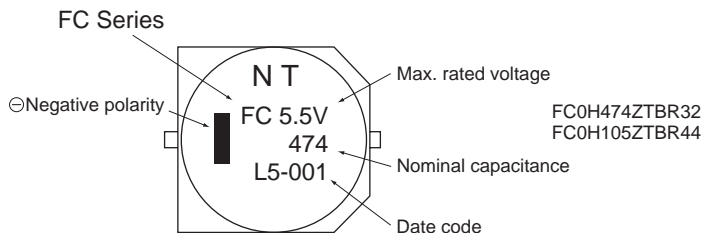

FC0H474ZTBR32
FC0H105ZTBR44



Standard Rating

Part Number	Max. Rated Voltage (Vdc)	Nominal Capacitance Discharge system (F)	Max. ESR (at 1kHz) (Ω)	Max. current at 30 minutes (mA)	Voltage Holding Characteristic Min. (V)	Dimension (Unit:mm)								
						D	H	A	B	I	W	P	K	L
FC0H473ZTBR24	5.5	0.047	50	0.071	4.2	10.5	5.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}
FC0H104ZTBR24	5.5	0.10	25	0.15	4.2	10.5	5.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}
FC0H224ZTBR24	5.5	0.22	25	0.33	4.2	10.5	8.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}
FC0H474ZTBR32	5.5	0.47	13	0.71	4.2	16.0	9.5	16.3	16.3	6.8±1.0	1.2	5.0	1.2±0.35	0 ^{+0.5} _{-0.1}
FC0H105ZTBR44	5.5	1.00	7	1.50	4.2	21.0	10.5	21.6	21.6	7.0±1.0	1.4	10.0	1.2±0.35	0 ^{+0.5} _{-0.1}
FC0V104ZTBR24	3.5	0.10	50	0.090	-	10.5	5.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}
FC0V224ZTBR24	3.5	0.22	25	0.20	-	10.5	5.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}
FC0V474ZTBR24	3.5	0.47	25	0.42	-	10.5	8.5	10.8	10.8	3.6±0.5	1.2	5.0	0.7±0.2	0 ^{+0.3} _{-0.1}

Precautions for use

- This capacitor is exclusive use of reflow soldering. It's designed for thermal conduction system such as infrared ray (IR) or heat blow. For applying other methods, Please consult with us first.
- Graph at the left, "Reflow Condition" indicates the surface temperature at the top of capacitor.

- Reflow Condition

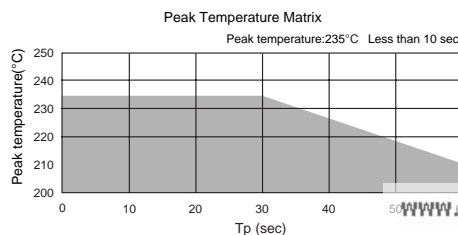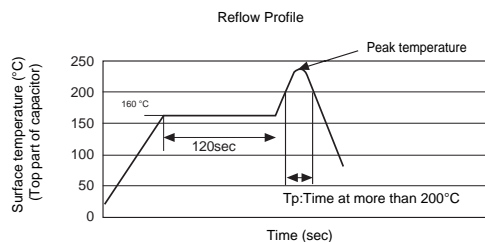


www.DataSheet4U.com

Tape and Reel Dimensions

[Reel Dimensions]


(mm)

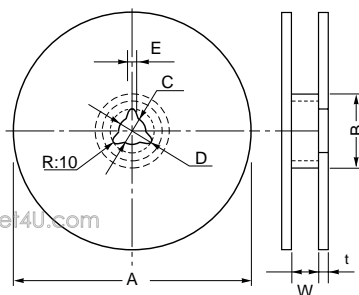

Mark	TBR24	TBR32	TBR44
A	380±2	330±2	380±2
B	Product height 5.5mm	80±1	100±1
	Product height 8.5mm	100±1	
C	13±0.5	13±0.5	13±0.5
D	21±0.8	21±0.8	21±0.8
E	2±0.5	2±0.5	2±0.5
W	25.5±0.5	32.5±0.5	44.5±0.5
t	Product height 5.5mm	3.0	2.8
	Product height 8.5mm	2.8	

Dimensions of indented [square-hole plastic tape]

(mm)

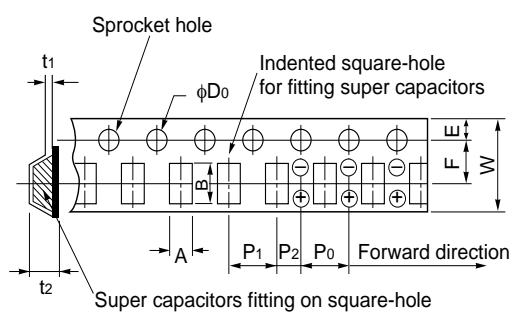

Mark	TBR24	TBR32	TBR44
W	24.0	32.0	44.0
A	11.4	18.0	23.0
B	13.0	20.0	25.0
P ₀	4.0	4.0	4.0
P ₁	16.0	24.0	32.0
P ₂	2.0	2.0	2.0
F	11.5	14.2	20.2
φD ₀	1.55	1.55	1.55
t ₁	0.4	0.5	0.5
E	1.75	1.75	1.75
t ₂	5.8	10.0	12.0

Number of packaged Super capacitors

Part Number	Packaging
FC0H473ZTBR24	1000pcs./reel
FC0H104ZTBR24	1000pcs./reel
FC0H224ZTBR24	500pcs./reel
FC0H474ZTBR32	200pcs./reel
FC0H105ZTBR44	150pcs./reel
FC0V104ZTBR24	1000pcs./reel
FC0V224ZTBR24	1000pcs./reel
FC0V474ZTBR24	500pcs./reel

Specifications 5.5V Type

Item		Standard		Test Conditions conforming to JIS C 5102-1994		
Operating Temperature Range		-25°C to +70°C				
Maximum Operating Voltage		5.5 VDC				
Nominal Capacitance Range		0.047 to 1.0F		See characteristics measuring method.		
Capacitance Allowance		+80%, -20%		See characteristics measuring method.		
Equivalent Series Resistance		See standard list		See characteristics measuring method.		
Current (30-minutes value)		See standard list		See characteristics measuring method.		
* Surge Voltage ₂₀		Capacitance	More than 90% of initial requirement	Conforms to 7.14 Surge Voltage: 6.3 V(5.5V products) Temperature: 70 ± 2°C Charge: 30 sec. Discharge: 9 min. 30 sec. Number of cycles 1000 cycles. Charge resistance: 0.047F 300 Ω Discharge resistance: 0 Ω		
		Equivalent series resistance	Not to exceed 120% of initial requirement			
		Current (30-minute value)	Not to exceed 120% of initial requirement			
		Appearance	No obvious abnormality			
* Temperature Variation of Characteristics		Phase 2		Capacitance	50% or higher of initial value	Conforms to 7.12 Phase 1: +25 ± 2°C Phase 2: -25 ± 2°C Phase 3: -40 ± 2°C Phase 4: +25 ± 2°C Phase 5: +70 ± 2°C Phase 6: +25 ± 2°C
				Equivalent series resistance	4 or less times initial value	
		Phase 5		Capacitance	200% or below of initial value	
				Equivalent series resistance	Satisfy initial standard value	
				Current (30-minute value)	1.5 CV (mA) or below	
		Phase 6		Capacitance	Within ±20% of initial value	
				Equivalent series resistance	Satisfy initial standard value	
				Current (30-minute value)	Satisfy initial standard value	
		* Vibration Resistance		Capacitance	Satisfy initial standard value	
Equivalent series resistance						
Current (30-minute value)						
Appearance	No obvious abnormality					
* Soldering Heat Resistance		Capacitance	Satisfy initial standard value	Conforms to 8.5 Solder temperature: 260 ± 10°C Dipping duration: 10 ± 1 sec. Dipped up to 1.6 mm from the lower end of the capacitor.		
		Equivalent series resistance				
		Current (30-minute value)				
		Appearance				No obvious able abnormality
* Temperature Cycle		Capacitance	Satisfy initial standard value	Conforms to 9.3 Temperature condition: -25°C → normal temperature → +70°C → normal temperature Number of cycles: 5 cycles		
		Equivalent series resistance				
		Current (30-minute value)				
		Appearance				No obvious abnormality
* Humidity Resistance		Capacitance	Within 20% of initial value	Conforms to 9.5 Temperature: 40 ± 2°C Relative humidity: 90 to 95% RH Test duration: 240 ± 8 hours		
		Equivalent series resistance	1.2 or less times initial standard value			
		Current (30-minute value)	1.2 or less times initial standard value			
		Appearance	No obvious abnormality			
* High Temperature Load		Capacitance	Within 30% of initial value	Conforms to 9.10 Temperature: 70 ± 2°C Voltage applied: 5.5 Vdc Series protection resistance: 0 Ω Test duration: 1000 ⁺⁴⁸ ₀ hours		
		Equivalent series resistance	Twice or less times initial standard value			
		Current (30-minute value)	Twice or less times initial standard value			
		Appearance	No obvious abnormality			
* Voltage Holding Characteristics (Self Discharge)		Voltage between terminal leads higher than 4.2 V		Charging condition	Voltage applied: 5.0 VDC Series resistance: 0 Ω Charging time: 24hours	
				Storage	Time: 24hours Temperature: Lower than 25°C	

* The characteristics above must be satisfied for asterisked items after the end of reflow soldering (according to the reflow condition shown on page).

Specifications 3.5V Type

Item		Standard		Test Conditions conforming to JIS C 5012 ⁻¹⁹⁹⁴
Operating Temperature Range		-25°C to +70°C		
Maximum Operating Voltage		3.5 VDC		
Nominal Capacitance Range		0.010 to 0.47F		See characteristics measuring method.
Capacitance Allowance		+80%, -20%		See characteristics measuring method.
Equivalent Series Resistance		See standard list		See characteristics measuring method.
Current (30-minutes value)		See standard list		See characteristics measuring method.
* Surge Voltage	Capacitance	More than 90% of initial requirement		Conforms to 7.14 Surge Voltage: 4.0 V(3.5V products) Temperature: 70 ± 2°C Charge: 30 sec. Discharge: 9 min. 30 sec. Number of cycles 1000 cycles. Charge resistance : 0.10F 150 Ω : 0.22F 56 Ω : 0.47F 30 Ω : 1.0F 15 Ω Discharge resistance: 0 Ω
	Equivalent series resistance	Not to exceed 120% of initial requirement		
	Current (30-minute value)	Not to exceed 120% of initial requirement		
	Appearance	No obvious abnormality		
* Temperature Variation of Characteristics	Phase 2	Capacitance	50% or higher of initial value	Conforms to 7.12 Phase 1: +25 ± 2°C Phase 2: -25 ± 2°C Phase 3: -40 ± 2°C Phase 4: +25 ± 2°C Phase 5: +70 ± 2°C Phase 6: +25 ± 2°C
		Equivalent series resistance	4 or less times initial value	
	Phase 5	Capacitance	200% or below of initial value	
		Equivalent series resistance	Satisfy initial standard value	
		Current (30-minute value)	1.5 CV (mA) or below	
	Phase 6	Capacitance	Within ±20% of initial value	
		Equivalent series resistance	Satisfy initial standard value	
		Current (30-minute value)	Satisfy initial standard value	
	* Vibration Resistance	Capacitance	Satisfy initial standard value	Conforms to 8.2.3 Frequency : 10 to 55 Hz Test duration : 6 hours
Equivalent series resistance				
Current (30-minute value)				
Appearance		No obvious abnormality		
* Soldering Heat Resistance	Capacitance	Satisfy initial standard value	Conforms to 8.5 Solder temperature: 260 ± 10°C Dipping duration: 10 ± 1 sec. Dipped up to 1.6 mm from the lower end of the capacitor.	
	Equivalent series resistance			
	Current (30-minute value)			
	Appearance	No obvious able abnormality		
* Temperature Cycle	Capacitance	Satisfy initial standard value	Conforms to 9.3 Temperature condition: -25°C → normal temperature → +70°C → normal temperature Number of cycles: 5 cycles	
	Equivalent series resistance			
	Current (30-minute value)			
	Appearance	No obvious abnormality		
* Humidity Resistance	Capacitance	Within 20% of initial value	Conforms to 9.5 Temperature: 40 ± 2°C Relative humidity: 90 to 95% RH Test duration: 240 ± 8 hours	
	Equivalent series resistance	1.2 or less times initial standard value		
	Current (30-minute value)	1.2 or less times initial standard value		
	Appearance	No obvious abnormality		
* High Temperature Load	Capacitance	Within 30% of initial value	Conforms to 9.10 Temperature: 70 ± 2°C Voltage applied: 3.5 Vdc Series protection resistance: 0 Ω Test duration: 1000 ⁺⁴⁸ ₀ hours	
	Equivalent series resistance	Twice or less times initial standard value		
	Current (30-minute value)	Twice or less times initial standard value		
	Appearance	No obvious abnormality		

* The characteristics above must be satisfied for asterisked items after the end of reflow soldering (according to the reflow condition shown on page).