

4825898 INTEGRATED POWER

82D 00304 D

T-58-11-23

INTEGRATED POWER SEMICONDUCTORS, LTD.

1.5A, 3-Terminal, Negative Adjustable Regulators

Description

The IP137A family of negative adjustable regulators will deliver up to 1.5 amps output current over an output voltage range of -1.2V to -47V. Integrated Power has made significant improvements in these regulators compared to previous devices, such as better line and load regulation, and a maximum output voltage error of 1%.

Internal current and power limiting coupled with true thermal limiting prevents device damage due to overloads or shorts, even if the regulator is not fastened to a heat sink.


Maximum reliability is attained with Integrated Power's advanced processing techniques combined with a 100% burn-in in the thermal limit mode. This assures that all device protection circuits are working and eliminates field failures experienced with other regulators that receive only standard electrical testing.

Features

- 1% initial voltage tolerance
- 0.01%/V line regulation
- 0.5% load regulation
- 0.02%/W thermal regulation
- 100% thermal limit burn-in

Section 5 - Voltage Regulators
IP137A, IP237A, IP337A, LM137, LM237, LM337
IP137AHV, IP237AHV, IP337AHV,
LM137HV, LM237HV, LM337HV

Connections

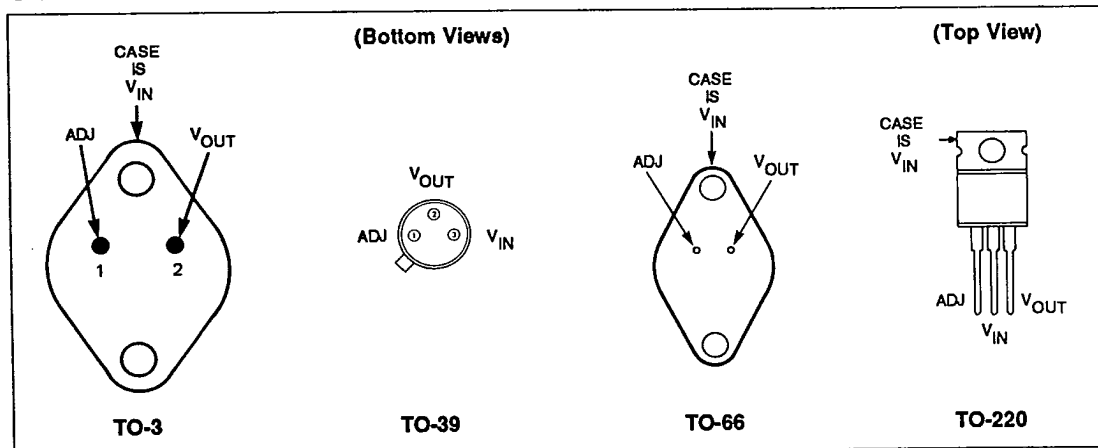
IPS

5-25

4825898 INTEGRATED POWER

82D 00305 D

T-58-11-23

Absolute Maximum Ratings

Power Dissipation	Internally Limited
Input to output voltage differential	40V
Input to output voltage differential(HV)	50V
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	300°C

Operating Junction Temperature Range	
IP137AHV, IP137A	-55°C to +150°C
LM137HV, LM137	-55°C to +150°C
IP237AHV, IP237A	-25°C to +150°C
LM237HV, LM237	-25°C to +150°C
IP337AHV, IP337A	0°C to +125°C
LM337HV, LM337	0°C to +125°C

Absolute maximum ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the device should be operated at these limits. The electrical characteristics provide conditions for actual device operation.

Preconditioning: 100% Thermal Limit Burn-in**Electrical Characteristics (Notes 1 and 3)**

Parameter	Test Conditions	IP137A IP237A IP137AHV IP237AHV			LM137 LM237 LM137HV LM237HV			Units
		Min	Typ	Max	Min	Typ	Max	
Reference Voltage, V_{REF}	$I_{OUT} = 10 \text{ mA}$	-1.238	-1.250	-1.262	-1.225	-1.250	-1.275	V
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq V_{MAX}$	-1.220	-1.250	-1.280	-1.200	-1.250	-1.300	V
	$10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$, $P \leq P_{MAX}$							
Line Regulation, $\Delta V_{OUT}/\Delta V_{IN}$	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq V_{MAX}$		0.005	0.010		0.010	0.020	%/V
	(See Note 2)		0.010	0.030		0.020	0.050	%/V
Load Regulation, $\Delta V_{OUT}/\Delta I_{OUT}$	$10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$		5	25		15	25	mV
	(See Note 2 and 3)		0.1	0.5		0.3	0.5	%
	$[V_O] \leq 5\text{V}$		10	50		20	50	mV
	$[V_O] \geq 5\text{V}$		0.2	1.0		0.3	1.0	%
Thermal Regulation	$T_A = 25^\circ\text{C}$, 10 msec Pulse		0.002	0.02		0.002	0.02	%/W
Ripple Rejection	$V_{OUT} = -10\text{V}$, $C_{ADJ} = 0$	60	66		60			dB
	$f = 120 \text{ Hz}$, $C_{ADJ} = 10\mu\text{F}$	70	80		66	77		dB
Adjust Pin Current, I_{ADJ}			65	100		65	100	μA
Adjust Pin Current Change, ΔI_{ADJ}	$10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$		0.2	2		0.5	5	μA
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq 40\text{V}$		1.0	5		2	5	μA
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq 50\text{V}$, HV Series		2.0	6		3	6	μA
Minimum Load Current, I_{MIN}	$[V_{IN} - V_{OUT}] \leq 40\text{V}$		2.5	5.0		2.5	5.0	mA
	$[V_{IN} - V_{OUT}] \leq 10\text{V}$		1.2	3.0		1.2	3.0	mA
Current Limit, I_{CL}	$[V_{IN} - V_{OUT}] \leq 15\text{V}$ K, R, T Package	1.5	2.2	3.2	1.5	2.2	3.2	A
	H Package	0.5	0.8	1.5	0.5	0.8	1.5	A
	$[V_{IN} - V_{OUT}] = 40\text{V}$ K, R, T Package	0.24	0.4		0.24	0.4		A
	H Package	0.15	0.17		0.15	0.17		A
	$[V_{IN} - V_{OUT}] = 50\text{V}$ K, R, T Package	0.2	0.4	0.8	0.2	0.4	0.8	A
	HV Series H Package	0.1	0.17	0.5	0.1	0.17	0.5	A
Temperature Stability, $\Delta V_{OUT}/\Delta T_{EMP}$			0.6	1.5		0.6		%
Long Term Stability, $\Delta V_{OUT}/\Delta T_{IME}$	$T_A = 125^\circ\text{C}$, 1000 Hrs		0.3	1		0.3	1	%
RMS Output Noise (% of V_{OUT}), e_n	$T_A = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		0.003			0.003		%
Thermal Resistance Junction to Case, θ_{jc}	K Package		2.3	3		2.3	3	$^\circ\text{C/W}$
	R Package		5	7		5	7	$^\circ\text{C/W}$
	H Package		12	15		12	15	$^\circ\text{C/W}$

T-58-11-23

Parameter	Test Conditions	IP337A IP337AHV			LM337 LM337HV			Units
		Min	Typ	Max	Min	Typ	Max	
Reference Voltage, V_{REF}	$I_{OUT} = 10 \text{ mA}$	-1.238	-1.250	-1.262	-1.213	-1.250	-1.287	V
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq V_{MAX}$ $10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$, $P \leq P_{MAX}$	-1.220	-1.250	-1.280	-1.200	-1.250	-1.300	V
Line Regulation, $\Delta V_{OUT}/\Delta V_{IN}$	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq V_{MAX}$ (See Note 2)		0.005	0.010		0.010	0.040	%/V
			0.010	0.03		0.020	0.070	%/V
Load Regulation, $\Delta V_{OUT}/\Delta I_{OUT}$	$10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$, $[V_O] \leq 5\text{V}$ (See Note 2 and 3)		5	25		15	50	mV
	$[V_O] \geq 5\text{V}$		0.1	0.5		0.3	1.0	%
	$[V_O] \leq 5\text{V}$		10	50		20	70	mV
	$[V_O] \geq 5\text{V}$		0.2	1.0		0.3	1.5	%
Thermal Regulation	$T_A = 25^\circ\text{C}$, 10 msec Pulse		0.002	0.020		0.003	0.04	%/W
Ripple Rejection	$V_{OUT} = -10\text{V}$, $C_{ADJ} = 0$		60	66		60		dB
	$f = 120 \text{ Hz}$, $C_{ADJ} = 10\mu\text{F}$		70	80		66	77	dB
Adjust Pin Current, I_{ADJ}			65	100		65	100	μA
Adjust Pin Current Change, ΔI_{ADJ}	$10 \text{ mA} \leq I_{OUT} \leq I_{MAX}$		0.2	2		0.5	5	μA
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq 40\text{V}$		1.0	5		2	5	μA
	$3\text{V} \leq [V_{IN} - V_{OUT}] \leq 50\text{V}$		2.0	6		3	6	μA
Minimum Load Current, I_{MIN}	$[V_{IN} - V_{OUT}] \leq 40\text{V}$		2.5	5		2.5	10	mA
	$[V_{IN} - V_{OUT}] \leq 10\text{V}$		1.2	3.0		1	6	mA
Current Limit, I_{CL}	$[V_{IN} - V_{OUT}] \leq 15\text{V}$, K, R, T Package		1.5	2.2	3.5	1.5	2.2	A
	H Package		0.5	0.8	1.8	0.5	0.8	A
	$[V_{IN} - V_{OUT}] = 40\text{V}$, K, R, T Package		0.24	0.5	1.0	0.15	0.4	A
	H Package		0.15	0.17		0.10	0.17	A
	$[V_{IN} - V_{OUT}] = 50\text{V}$, K, R, T Package		0.2	0.4	0.8	0.1	0.4	A
	H Package		0.1	0.17	0.5	0.05	0.17	A
Temperature Stability, $\Delta V_{OUT}/\Delta T_{EMP}$			0.6	1.5		0.6		%
Long Term Stability, $\Delta V_{OUT}/\Delta T_{IME}$	$T_A = 125^\circ\text{C}$, 1000 Hrs		0.3	1		0.3	1	%
RMS Output Noise (% of V_{OUT}), e_n	$T_A = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		0.003			0.003		%
Thermal Resistance Junction to Case, θ_{JC}	K Package		2.3	3		2.3	3	$^\circ\text{C/W}$
	R Package		5	7		5	7	$^\circ\text{C/W}$
	T Package		4	5		4		$^\circ\text{C/W}$
	H Package		12	15		12	15	$^\circ\text{C/W}$

The • denotes the specifications which apply over the full operating temperature range, all others apply at $T_j = 25^\circ\text{C}$ unless otherwise specified.

Note 1: Unless otherwise specified, $[V_{IN} - V_{OUT}] = 5\text{V}$, $I_{OUT} = 0.1\text{A}$ for the TO-39 (H) Package, and $I_{OUT} = 0.5\text{A}$ for the TO-3 (K), TO-66 (R), and TO-220 (T) Packages. Although power dissipation is internally limited, these specifications apply for dissipations up to 2W for the TO-39, and 20W for the TO-3, TO-66 and TO-220. $I_{MAX} = 0.5\text{A}$ for the TO-39 and 1.5A for the TO-3, TO-66 and TO-220.

Note 2: Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at a point 1/8" from the bottom of the package for the TO-3 and TO-66, at the junction of the wide and narrow portion of the output lead for the TO-220, and 1/8" below the base of the package on the output pin of the TO-39.

Note 3: $V_{MAX} = 40\text{V}$, IP137A, IP237A, IP337A, LM137, LM237, LM337.
 $V_{MAX} = 50\text{V}$ for IP137AHV, IP237AHV, IP337AHV, LM137HV, LM237HV, LM337HV.

Section 5 - Voltage Regulators
 IP137A, IP237A, IP337A, LM137, LM237, LM337
 IP137AHV, IP237AHV, IP337AHV,
 LM137HV, LM237HV, LM337HV




4825898 INTEGRATED POWER

82D 00307 D


T-58-11-23

Typical Performance Characteristics


Dropout Voltage




Temperature Stability




Minimum Load Current




Ripple Rejection




Ripple Rejection




Ripple Rejection




Output Impedance




Line Transient Response




Load Transient Response




Load Regulation*



Current Limit



Adjustment Current



*The IP137A/AHV, IP237A/AHV, IP337A/AHV series has load compensation which makes the typical unit read close to zero. This band represents the typical production spread.




7-58-11-23

Applications Information



High Stability Regulator:

The output stability, load regulation, line regulation, thermal regulation, temperature drift, long term drift, and noise, can be improved by a factor of 6.6 over the standard regulator configuration. This assumes a zener has 20PPM/°C maximum drift and about 10 times lower noise than the regulator.

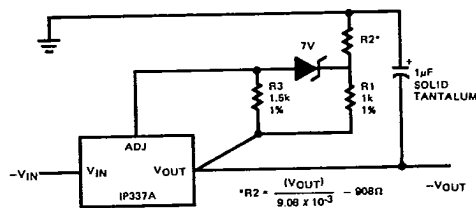


Multiple Tracking Regulators

In the application shown below, regulator #2 to "N" will track regulator #1 to within $\pm 24\text{mV}$ initially, and to $\pm 60\text{mV}$ over all load, line, and temperature conditions. If any regulator output is shorted to ground, all other outputs will drop to $\sim 2\text{V}$. Load regulation of regulators 2 to "N" will be improved by $V_{\text{OUT}}/1.25\text{V}$ compared to a standard regulator, so regulator #1 should be the one which has the lowest load current.

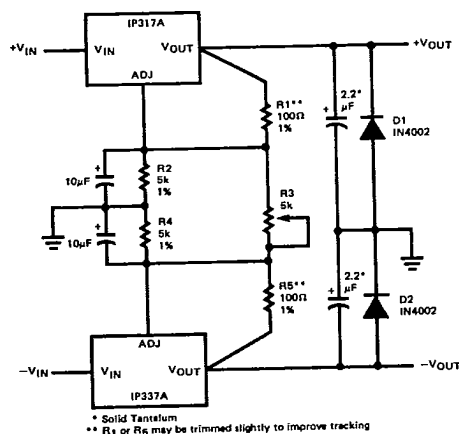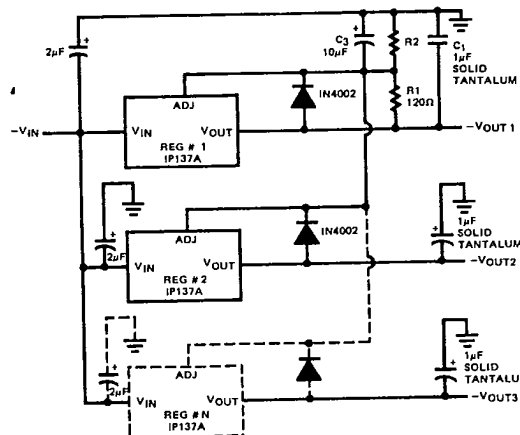

Dual Tracking Supply $\pm 1.25\text{V}$ to $\pm 20\text{V}$

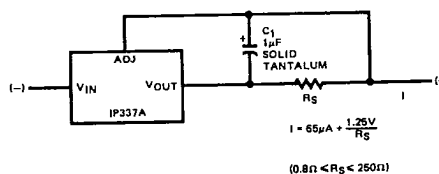

Current Regulator

Section 5 - Voltage Regulators
IP137A, IP237A, IP337A, LM137, LM237, LM337
IP137AHV, IP237AHV, IP337AHV,
LM137HV, LM237HV, LM337HV



82D 00309 D

7-58-11-23

4825898 INTEGRATED POWER

Order Information

Part Number	Temperature Range	Package
IP137AK/IP137AHVK/LM137K/LM137HVK	-55°C to +150°C	TO-3
IP137AH/IP137AHVH/LM137H/LM137HVH	-55°C to +150°C	TO-39
IP137AR/IP137AHVR/IP137R/IP137HVR	-55°C to +150°C	TO-66
IP137AG/IP137AHVG/IP137G/IP137HVG	-55°C to +150°C	Hermetic TO-220
IP237AK/IP237AHVK/LM237K/LM237HVK	-25°C to +150°C	TO-3
IP237AR/IP237AHVR/IP237R/IP237HVR	-25°C to +150°C	TO-66
IP337AK/IP337AHVK/LM337K/LM337HVK	0°C to +125°C	TO-3
IP337AR/IP337AHVR/IP337R/IP337HVR	0°C to +125°C	TO-66
IP337AT/IP337AHVT/LM337T/LM337HVT	0°C to +125°C	TO-220

Section 5 - Voltage Regulators
 IP137A, IP237A, IP337A, LM137, LM237, LM337
 IP137AHV, IP237AHV, IP337AHV, LM137HV, LM237HV, LM337HV

Integrated Power Semiconductors, Ltd. cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an Integrated Power product. No circuit patent licenses are implied. Integrated Power reserves the right to change the circuitry and specifications without notice at any time.

Integrated Power Semiconductors, Ltd.

2727 Walsh Avenue, Suite 201, Santa Clara, CA 95051 • Telephone: 408-727-2772 • Telex: 350073 (IPS SNTA) • FAX: 408-988-6185
 8 Quaker Drive, West Warwick, RI 02893 • Telephone: 401-821-4260 • Telex: 332948 (IPS RI) • FAX: 401-823-7260
 2081 Business Center Drive, Suite 140, Irvine, CA 92715 • Telephone: 714-752-0188 • FAX: 714-752-5019
 789 Timplike Street, North Andover, MA 01845 • Telephone: 617-683-9042 • FAX: 617-975-0193