

NEC[®]**NPN MEDIUM POWER
OSCILLATOR TRANSISTOR****NE243
SERIES**

T-33-05

FEATURES

- **HIGH OSCILLATOR POWER OUTPUT:**
630 mW TYP at 7.5 GHz
- **FREQUENCY USE TO 10 GHz**
- **LOW AM/FM NOISE**
- **HIGH RELIABILITY**

DESCRIPTION AND APPLICATIONS

The NE243 NPN series transistor is designed for oscillator applications to 10 GHz. Reliable operation is assured by NEC's gold, platinum and titanium metallization system. The NE243 series is available as a chip or in hermetically sealed packages.

PERFORMANCE SPECIFICATIONS ($T_A = 25^\circ\text{C}$)

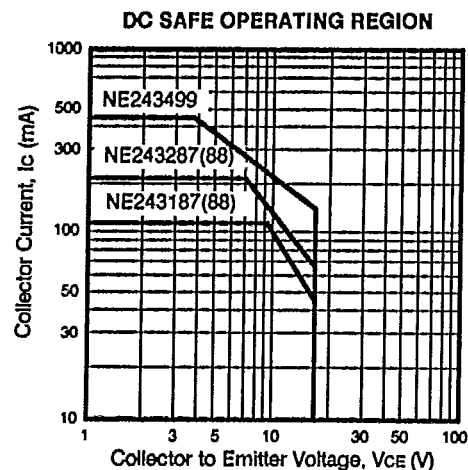
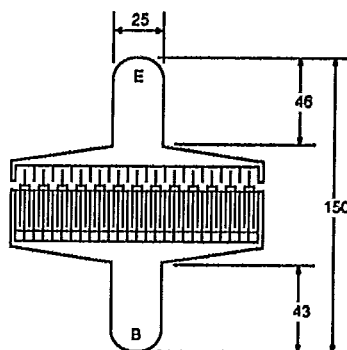
PART NUMBER			NE24300		NE243187 NE243188 87,88		NE243287 NE243288 87,88		NE243499	
PACKAGE OUTLINE			00 (CHIP)						99	
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MIN	TYP	MIN	TYP	MIN	TYP
P _{osc}	Oscillator Power Output at V _{CE} = 12 V, f = 7.5 GHz, I _C = 80 mA I _C = 120 mA I _C = 200 mA	mW mW mW		150		150		320		630
S ₂₁ ²	Insertion Power Gain at V _{CC} = 8 V, f = 1 GHz, I _C = 50 mA I _C = 100 mA I _C = 200 mA	dB dB dB	4.3		4.3		4		3.5	

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

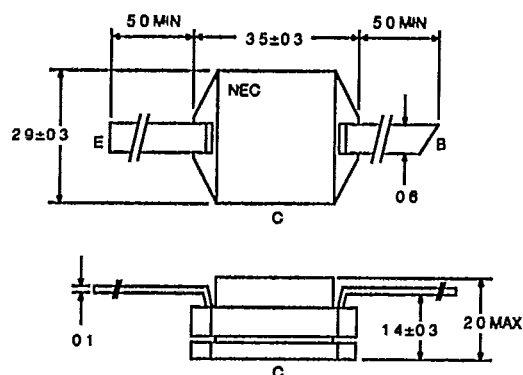
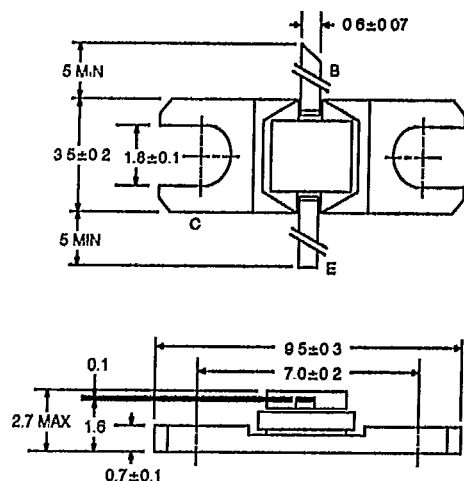
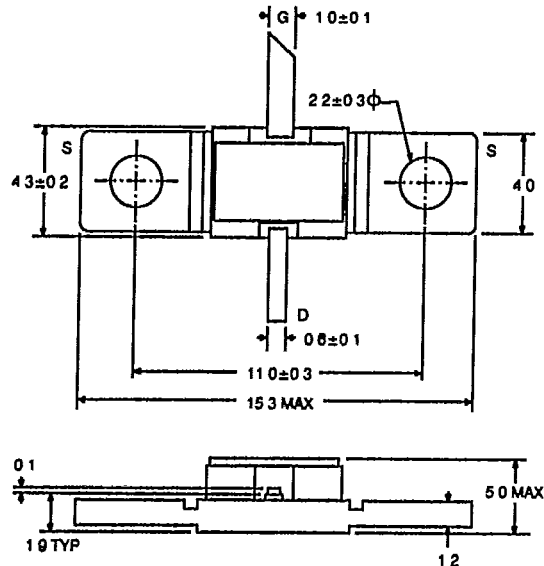
PART NUMBER			NE24300			NE243187 NE243188 87,88			NE243287 NE243288 87,88			NE243499		
PACKAGE OUTLINE			00 (CHIP)									99		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
I _{CBO}	Collector Cutoff Current at V _{CB} = 15 V, I _E = 0	μA			0.25			0.25			0.5			1
I _{EBO}	Emitter Cutoff Current at V _{EB} = 1 V, I _C = 0	μA			1			1			2			4
h _{FE}	Forward Current Gain at V _{CE} = 8 V, I _C = 50 mA I _C = 100 mA I _C = 200 mA		20		200	20		200	20		200	20		200
C _{OB}	Output Capacitance at V _{CB} = 10 V, I _E = 0	pF		0.30			0.65	1		0.95	1.5		2.9	4
R _{TH}	Thermal Resistance (Junction-to-Case)	°C/W			45			45			30			18
P _T	Total Power Dissipation	W			2.75			2.75			5.5			9.7

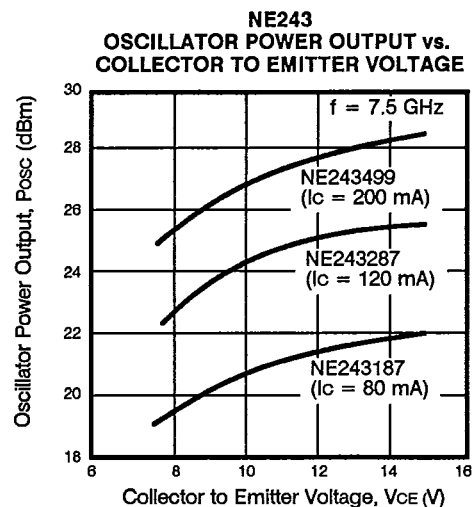
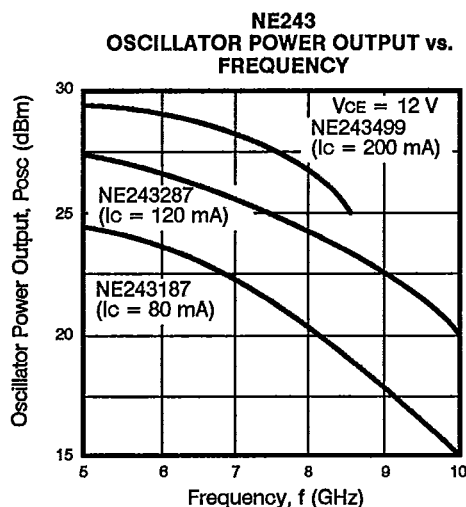
NE243 SERIES**ABSOLUTE MAXIMUM RATINGS** ($T_A = 25^\circ\text{C}$)

SYMBOLS	PARAMETERS	UNITS	RATINGS
V_{CB0}	Collector to Base Voltage	V	25
V_{EB0}	Emitter to Base Voltage	V	1.5
V_{CE0}	Collector to Emitter Voltage	V	16
V_{CER*}	Collector to Emitter Voltage	V	25
I_C	Collector Current		
	NE24300	mA	110
	NE243187, NE243188	mA	110
	NE243287, NE243288	mA	220
	NE243499	mA	440
T_J	Junction Temperature	$^\circ\text{C}$	200
T_{STG}	Storage Temperature	$^\circ\text{C}$	-65 to +200

* $R_{BE} = 300\ \Omega$ **TYPICAL DEVICE CHARACTERISTICS** ($T_A = 25^\circ\text{C}$)**OUTLINE DIMENSIONS** (Units in mm)**NE24300 (CHIP)**

Die Size: $350 \times 350\ \mu\text{m}$
 Die Thickness: 110 to 160 μm

OUTLINE 87**OUTLINE 88****OUTLINE 99**

TYPICAL PERFORMANCE CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

NE243187 COMMON COLLECTOR* SCATTERING PARAMETERS

S-MAGN AND ANGLES:

VCE = 12 V, IC = 80 mA

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
2000	.92	-75	1.70	-53	.46	27	.78	118
3000	.85	-109	1.51	-76	.61	2	.69	89
4000	.81	-140	1.35	-97	.72	-24	.58	64
5000	.77	-171	1.21	-118	.79	-46	.50	39
6000	.72	161	1.06	-137	.83	-68	.42	16
7000	.69	130	.91	-157	.86	-89	.36	-2
8000	.65	105	.83	-175	.87	-115	.30	-20
9000	.68	74	.72	162	.85	-137	.26	-33
10000	.68	44	.60	143	.77	-163	.22	-27

*S₁₁ is base to collector, S₂₂ is emitter to collector.

NE243287 COMMON COLLECTOR* SCATTERING PARAMETERS

S-MAGN AND ANGLES:

VCE = 12 V, IC = 120 mA

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
2000	.97	-91	1.60	-59	.44	22	.72	129
3000	.96	-126	1.36	-82	.56	-3	.58	110
4000	.97	-156	1.16	-103	.62	-29	.45	99
5000	.98	175	.97	-124	.65	-50	.35	93
6000	.96	150	.80	-144	.62	-71	.30	96
7000	.92	127	.69	-159	.64	-92	.28	98
8000	.95	108	.60	-178	.62	-113	.31	99
9000	.97	81	.49	158	.57	-136	.37	89
10000	.96	54	.39	138	.54	-159	.43	75

*S₁₁ is base to collector, S₂₂ is emitter to collector.

NE243188 COMMON COLLECTOR* SCATTERING PARAMETERS

S-MAGN AND ANGLES:

VCE = 12 V, IC = 80 mA

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
2000	.91	-73	1.65	-50	.47	28	.72	120
3000	.83	-104	1.47	-72	.64	6	.65	93
4000	.77	-133	1.30	-91	.74	-20	.55	67
5000	.71	-159	1.17	-108	.81	-40	.49	42
6000	.65	176	1.02	-127	.85	-62	.43	18
7000	.59	148	.92	-145	.89	-81	.40	-2
8000	.51	123	.82	-164	.87	-105	.35	-27
9000	.53	94	.75	178	.88	-127	.32	-46
10000	.53	60	.67	156	.85	-151	.26	-62

*S₁₁ is base to collector, S₂₂ is emitter to collector.

NE243288 COMMON COLLECTOR* SCATTERING PARAMETERS

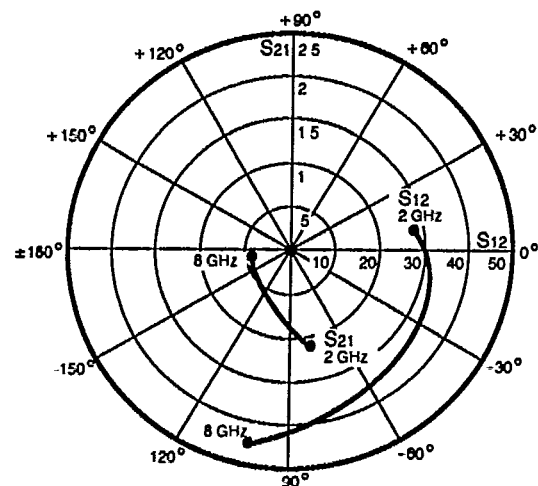
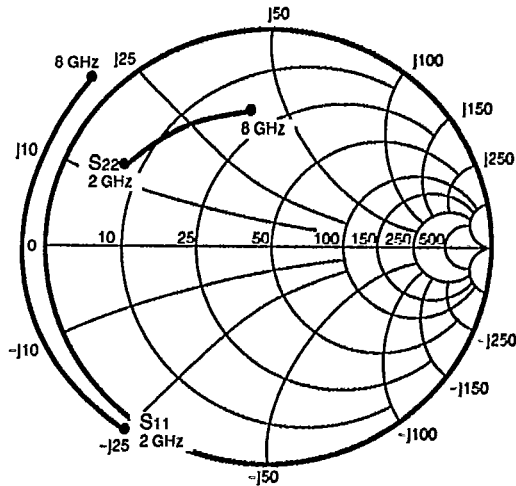
S-MAGN AND ANGLES:

VCE = 12 V, IC = 120 mA

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
2000	.97	-90	1.54	-56	.45	25	.69	132
3000	.96	-120	1.31	-77	.57	2	.55	116
4000	.96	-146	1.11	-95	.64	-22	.42	104
5000	.95	-169	.95	-112	.67	-42	.33	98
6000	.94	171	.81	-130	.68	-62	.25	96
7000	.91	151	.70	-145	.66	-79	.24	96
8000	.89	134	.61	-164	.65	-100	.23	97
9000	.92	112	.54	179	.64	-120	.30	87
10000	.97	87	.49	157	.63	-142	.36	71

*S₁₁ is base to collector, S₂₂ is emitter to collector.

NE243499 COMMON COLLECTOR* SCATTERING PARAMETERS



S-MAGN AND ANGLES:

VCE = 12 V, IC = 200 mA

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
2000	1.04	-125	1.12	-76	.29	8	.72	150
3000	1.06	-151	.84	-97	.32	-11	.67	143
4000	1.08	-170	.67	-114	.34	-33	.66	137
5000	1.10	173	.57	-130	.35	-48	.65	128
6000	1.08	159	.49	-145	.36	-67	.63	118
7000	1.03	146	.45	-159	.39	-82	.62	106
8000	1.06	134	.47	-175	.45	-103	.61	93

*S₁₁ is base to collector, S₂₂ is emitter to collector.