


Recommended P.C.B Layout

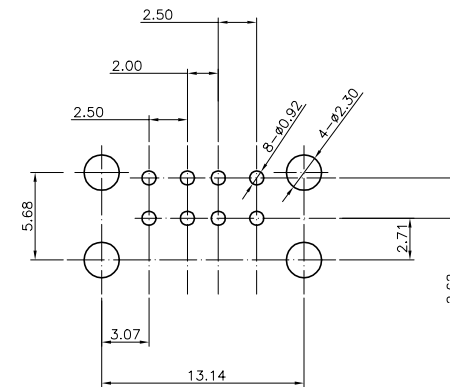

NOTE:
2547A-08□□□

1. Selective plated
 - G1T-05u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G2T-Gold flash in contact area/
100u" Min. Tin in soldr area.
 - G3T-10u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G4T-15u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G5T-30u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G6T-50u" Min. gold in contact area/
100u" Min. Tin in soldr area.

5	Shell	C2680	—	Ni Plated
4	Shell	C2680	—	Ni Plated
3	Shell	C2680	—	Ni Plated
2	Tetminal	C6280	—	Gold Plated
1	Plastic	PBT	Black	UL94V-9
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: USB Series A,R/A Dual Port Dip Type

ECIT-020418-04	A	02/04/18	A1:16.00±0.15->15.60±0.20	林怡豪	宋權哲	Angle 30 ~ ±0.50	DRAW	蔡志鴻	02/02/02	PART NO.					
	0	02/02/04	New			10 ~ 30 ±0.30	DESIGN	蔡志鴻	02/02/02	PART NO. (OLD)	2547A-08GXT				
						~ 10 ±0.15	CHECK	宋權哲	02/02/02	DRAWING NO.	2547A-08GXT				
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	宋權哲	02/02/02	SCALE	2:1	UNIT	mm	A4	