


30 Amp Schottky Rectifier

FST3230

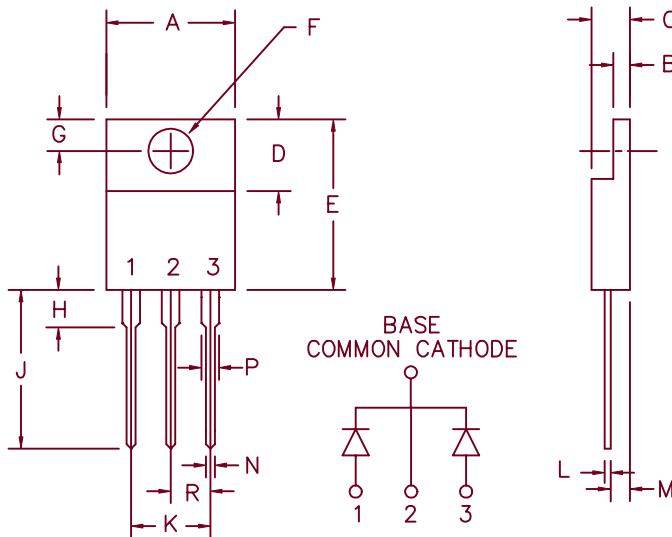

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.161	3.53	4.09	Dia.
G	.100	.135	2.54	3.43	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.022	.357	.559	
M	.080	.115	2.03	2.92	
N	.015	.040	.380	1.02	
P	.045	.070	1.14	1.78	
R	.090	.110	2.29	2.79	

PLASTIC TO-220AB

Microsemi Catalog Number	Industry Part Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
FST3230	30LT30CT 32CTQ030 MBR2030CTL	30V	30V

- Schottky barrier rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- V_{RRM} 30 Volts

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Peak Reverse Current per leg
Typical junction capacitance per leg

$I_{F(AV)}$ 30 Amps
 $I_{F(AV)}$ 15 Amps
 I_{FSM} 250 Amps
 V_{FM} 0.46 Volts
 V_{FM} 0.52 Volts
 I_{RM} 100 mA
 I_{RM} 1.5 mA
 C_J 780 pF

$T_C = 122^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
 $T_C = 122^\circ\text{C}$, Square wave, $R_{\theta JC} = 2.0^\circ\text{C}/\text{W}$
8.3ms, half sine, $T_J = 175^\circ\text{C}$
 $I_{FM} = 15\text{A}$, $T_J = 150^\circ\text{C}$ *
 $I_{FM} = 15\text{A}$, $T_J = 25^\circ\text{C}$ *
 V_{RRM} , $T_J = 125^\circ\text{C}$ *
 V_{RRM} , $T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}$, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec . Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	-55°C to + 150°C
Operating junction temp range	T_J	-55°C to + 150°C
Max thermal resistance per leg	$R_{\theta JC}$	2.0°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	1.0°C/W Junction to case
Mounting torque		15 inch pounds maximum (6-32 screw)
Weight		.06 ounces (1.8 grams) typical

FST3230

Figure 1
Typical Forward Characteristics – Per Leg

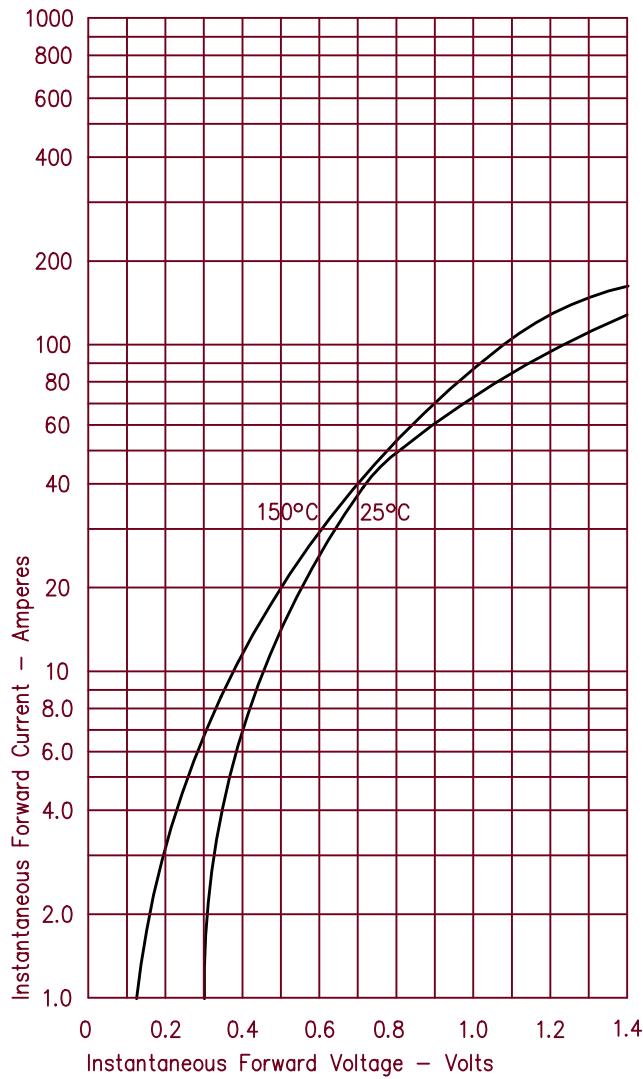


Figure 3
Typical Junction Capacitance – Per Leg

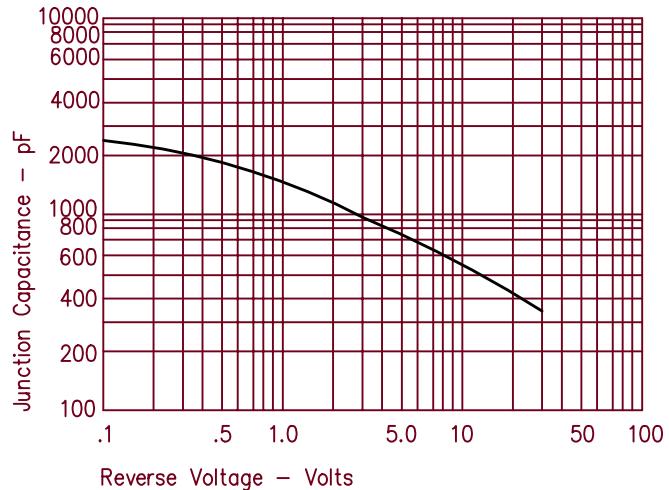


Figure 4
Forward Current Derating – Per Leg

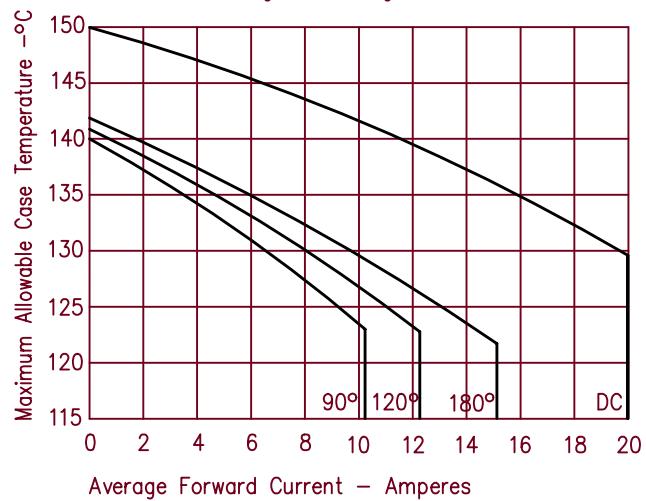


Figure 2
Typical Reverse Characteristics – Per Leg

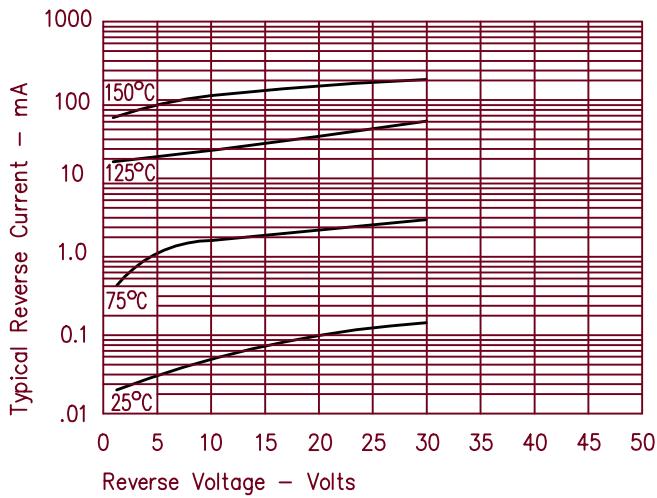


Figure 5
Maximum Forward Power Dissipation – Per Leg

