

GLP1-240M
Cordless TX-LPF

Inquire

Application

for Spurious reduction

Characteristics


| | |
|------------------|--------------------------------------|
| GLP1-240M | |
| Zin/Zout | 50 ohm Nominal |
| Pass Band | 240 up to 250MHz |
| Insertion Loss | 1.0dB max (240 up to 250MHz) |
| V.S.W.R | 1.5 max (240 up to 250MHz) |
| Attenuation | 28 dB min (at 2f : 480 up to 500MHz) |
| | 30 dB min (at 3f : 720 up to 750MHz) |

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

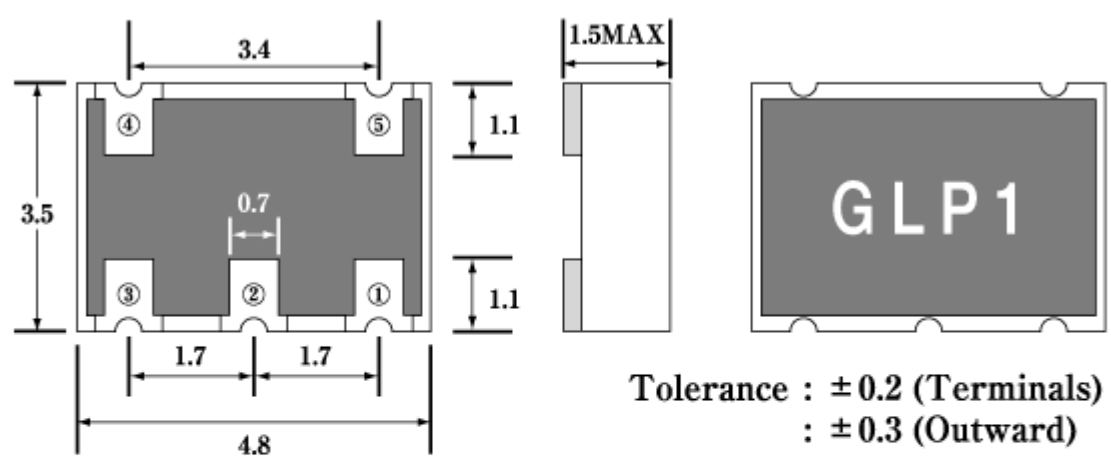

Tolerance : ± 0.2 (Terminals)
: ± 0.3 (Outward)


| Terminal | |
|----------|--------|
| ① | Input |
| ② | GND |
| ③ | Output |
| ④ | Fixed |
| ⑤ | Fixed |

Note

Do not connect any wiring (inclusive of grounding) to terminals No.4 and No.5.

They are provided solely for internal connections.

Frequency Data

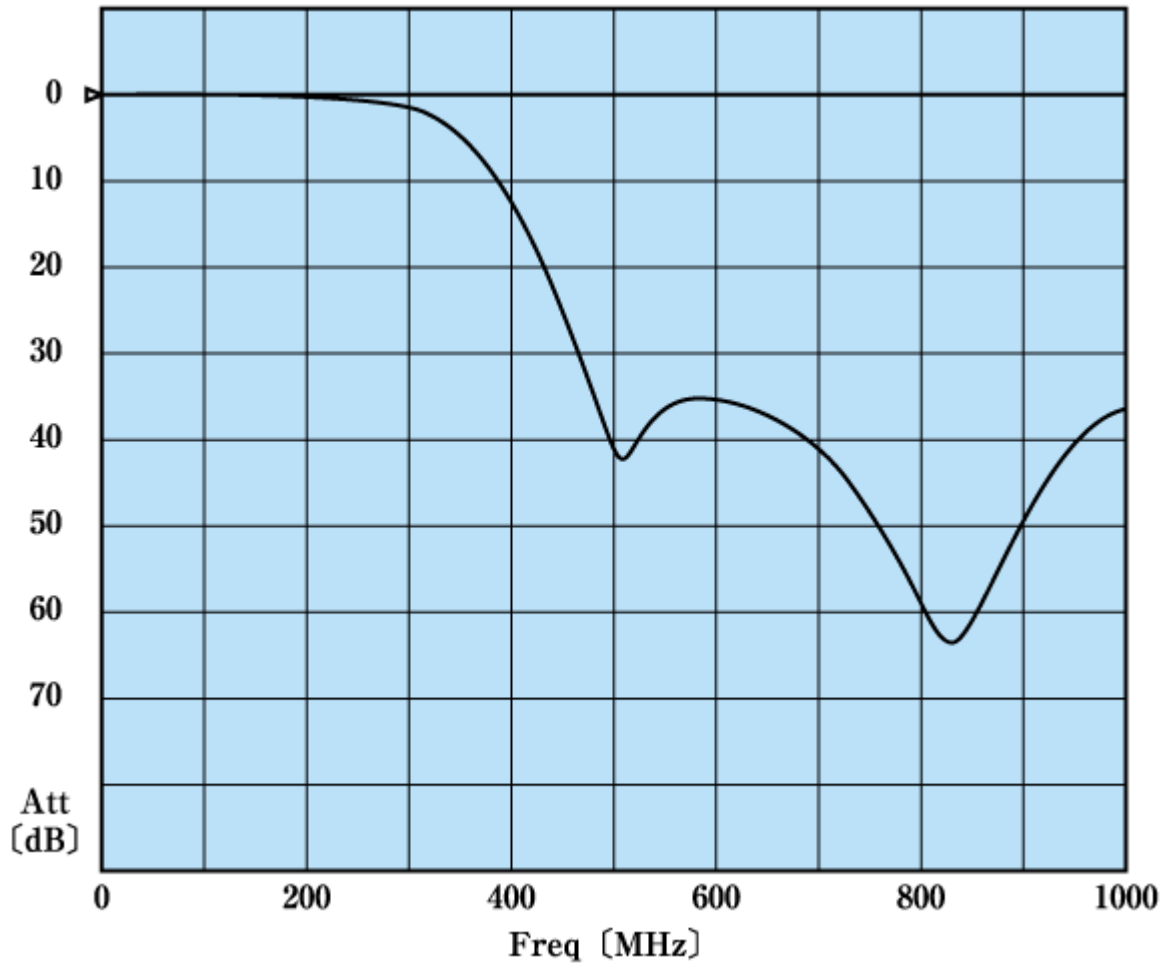

► Products II