


KEST

Your source for reliable Relays & Sockets


KS2E-M - Series

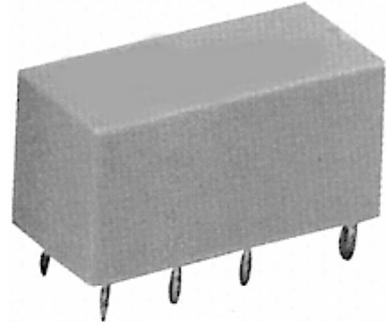

Miniature Power Relay

UL Approved

Dimension:	21 x 10 x 12mm
Coil Power:	<0.36W
Power-up:	<75%
Drop-out:	>10%
Contact Resistance:	<50mΩ
Insulation Resistance:	>100mΩ
Operating Temperature:	-25°C ~ +55°C
Life	Electrical: 10 ⁵ times
	Mechanical: 10 ⁷ times
Dielectric Strength	Open Contact: 1000v rms
	Coil and Contact: 1000v rms



Part Number	Coil Voltage	Contact Capacity	# Pins	
KS2E-M-DC3	3Vdc	2Amps	8	DPDT
KS2E-M-DC5	5Vdc	2Amps	8	DPDT
KS2E-M-DC12	12Vdc	2Amps	8	DPDT
KS2E-M-DC24	24Vdc	2Amps	8	DPDT

Available Socket
N/A

***Compare To:** 4078
DS2E