

E-Series RF 4:1 Transformer

0.15 - 110 MHz

ETC4-1-4

V3.00


Features

- 4:1 Impedance Ratio

Specifications @ 25°C

Frequency Range	0.15 - 110 MHz
Insertion Loss	Maximum
0.4 - 110 MHz	1 dB

Schematic

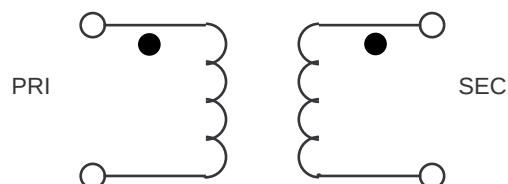


Ordering Information

Part No.	Packaging
ETC4-1-4	Tubes
ETC4-1-4TR	Tape & Reel

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

SM-22

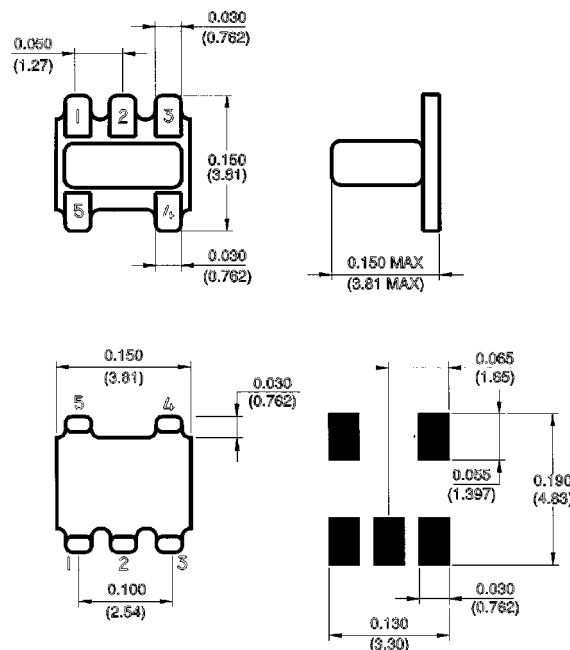

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Primary dot	5
Primary	4
Secondary dot	1
Secondary	3
Not Connected	2

S 0778 C