
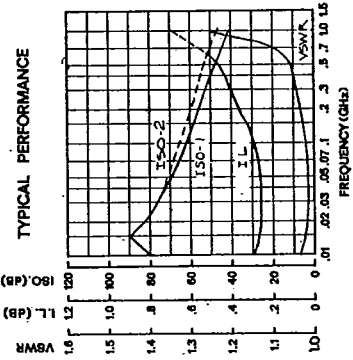

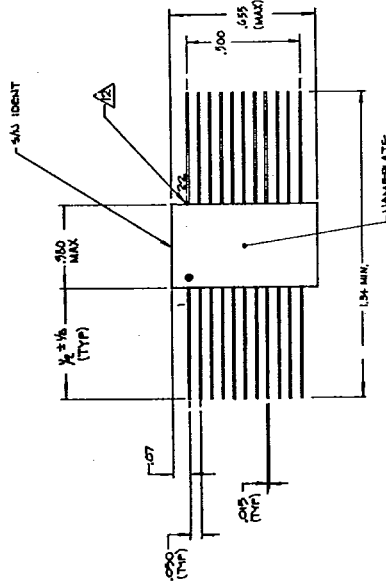


REV	DESCRIPTION	BY	DATE
1	REVISED PER DENOR	PL	10/2/74



1. DC POWER: +5 VOLTS ± 110 % MAXIMUM
2. CROSSTALK: -10-100 MZ 60 DB MINIMUM
3. SUTTING SPEED: 2 MINIMUM
4. CONTROL: 3 MINIMUM
5. ISOLATION: -10-100 MZ 60 DB MINIMUM
6. INSERTION LOSS: 1.0 DB MAXIMUM
7. VSWR: 1.25 MAXIMUM
8. IMPEDANCE: 50 OHMS
9. RF POWER: +15 DB MAXIMUM
10. REVERSE: 10-100 MZ 60 DB MINIMUM
11. PART NUMBER IS - 2000-1 OR 2000-2

NOTES: ALL SPECIFICATIONS ARE TYPICAL, UNLESS OTHERWISE SPECIFIED.

PART NUMBER		PART DESCRIPTION		PART NAME		PART DATE	
150D00031		SWITCH 3-SPST		DAICO INDUSTRIES, INC.		20983 150D00031	
CITY READ PER NOTED ASST		DIMENSIONS ARE IN INCHES		FRACTIONS DECIMALS		TOLERANCES	
DRAWN: J. J. J.		CHECK: J. J. J.		APPD: J. J. J.		ENG TEL: J. J. J.	
MATERIAL		FINISH		MATERIAL		FINISH	
MATERIAL		FINISH		MATERIAL		FINISH	