

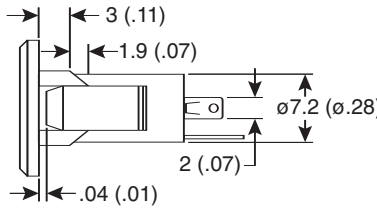




2 Conductor Sub-Miniature Jack 2.5 ϕ - 4


161-068SP

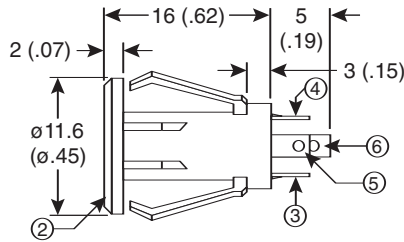

2 Conductor Sub-Miniature Mono Jack 2.5 ϕ - 4



Mounting Hole Dimension



Thickness of mounting board:
t=1.0~1.8
(t=.04~.027)

Part	Material	Finish
Contact D	BSR t=0.3	Ni
Contact C	FAB-EH t=0.25	Ni
Contact B	FAB-EH t=0.25	Ni
Contact A	FAB-EH t=0.25	Ni
Body	PA 66	
Metal	BSBM	Au

Dimensions: mm (In.)

SPECIFICATIONS	
Dielectric strength	500VAC for one minute
Contact Resistance:	50m Ω max.
Insulation Resistance:	100M Ω min. @ 500VDC

Date Last Revised: 3-21-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300246

161-068SP

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.