

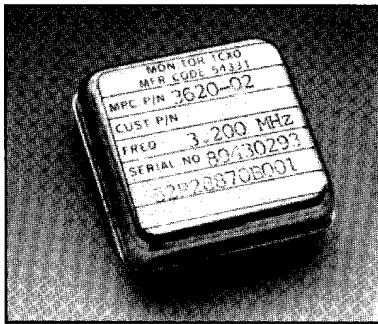


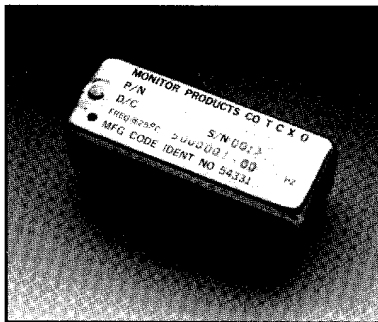


3620

Frequency Range: 3MHz - 20MHz
 Frequency Stability: ± 2 ppm
 Operating Temperature Range: -20°C to +70°C
 Input Voltage: 12VDC
 Input Current: 20mA
 Output Waveform: TTL Compatible
 Features: Ruggedized TCXO

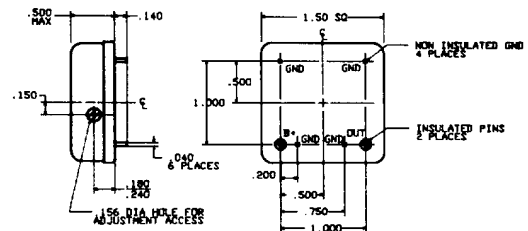



7191

Frequency Range: 4MHz - 10MHz
 Frequency Stability: ± 0.5 ppm
 Operating Temperature Range: -45°C to +85°C
 Input Voltage: 12VDC
 Input Current: 10mA
 Output Waveform: Sine Wave
 Features: Ruggedized, Hermetically Sealed, External Trim Capability

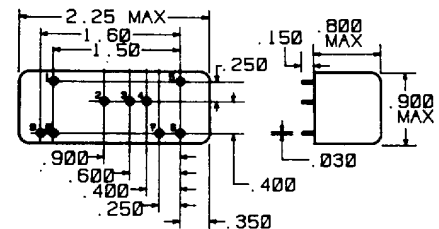

7279

Frequency Range: 6MHz - 20MHz
 Frequency Stability: ± 3 ppm
 Operating Temperature Range: -20°C to +75°C
 Input Voltage: 15VDC
 Input Current: 5mA
 Output Waveform: HCMOS Compatible
 Features: Extreme low profile TCXO, External trim capability

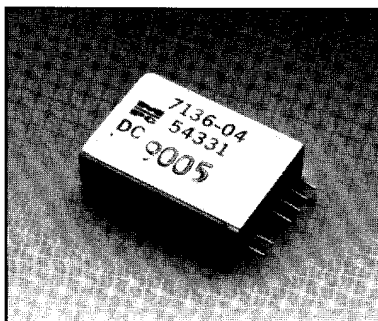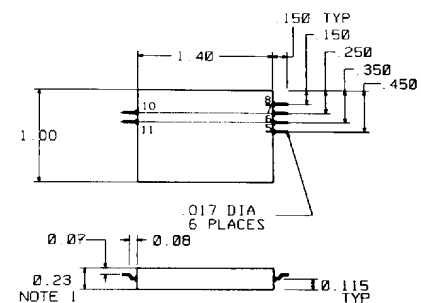

7136

Frequency Range: 25MHz - 75MHz
 Frequency Stability: ± 4 ppm
 Operating Temperature Range: -40°C to +75°C
 Input Voltage: 5.5V/13.5V
 Input Current: 5mA
 Output Waveform: Sine Wave
 Features: Hybrid TCXO, Hermetically sealed, External trim capability

