

SUBMINIATURE

LT-5™ Time Lag Fuse 665 Series



ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Time
100%	4 hours Min
150%	10 minutes Max
200%	60 sec Max

AGENCY APPROVALS: UL248-14 approved 250 mA through 6.3 A. Listed under the Components Program Underwriters Laboratories and recognized by CSA.

INTERRUPTING RATINGS: 50A at 250 VAC.

PACKAGING:

Please refer to the following suffixes when ordering.

Bulk 100 pieces:

Short Lead (Bulk) HXSL

Long Lead (Bulk) HXLL


Tape and Reel 750 pieces:

Long Lead (Tape and Reel IEC 286-2) ZRLL

PATENTED

ORDERING INFORMATION:

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	I ² t at 10 x I _n (A ² Sec)
0665.250	.250	250	.26
0665001.	1.00	250	6.85
066501.6	1.60	250	17.5
06653.15	3.15	250	55
066506.3	6.30	250	287

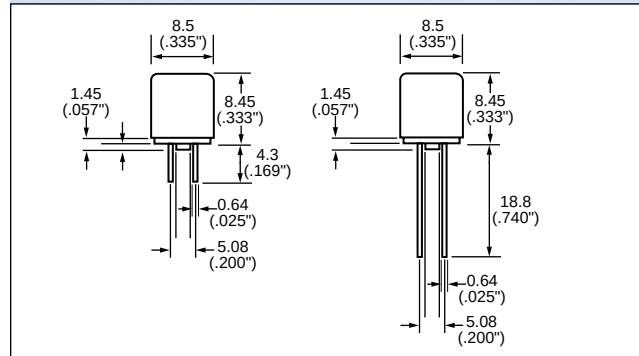

Average Time Current Curves

