



## XFEB322513 SERIES CHIP BEADS

- \* TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING  
3000 PCS PER 13" REEL
- \* FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- \* TEMP. RISE; 15°C TYPICAL ABOVE 60°C AMBIENT
- \* OPERATING TEMP.: -40°C TO +125°C

Schematic:



Mechanical Dimensions:

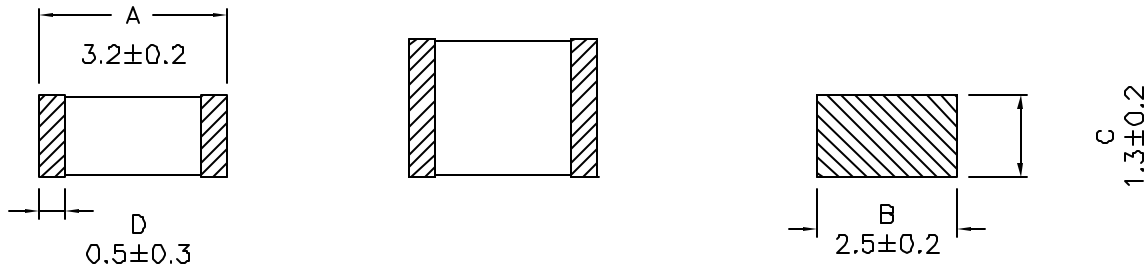

Part Number	IMPEDANCE (Ohms)	Test Frequency (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFEB322513-320	32±25%	100	0.30	400
XFEB322513-600	60±25%	100	0.30	400
XFEB322513-900	90±25%	100	0.30	400
XFEB322513-202	2000±25%	30	1.50	100