



## 7x7 Square/ Single Turn /Trimming Potentiometer

-- 3323W --

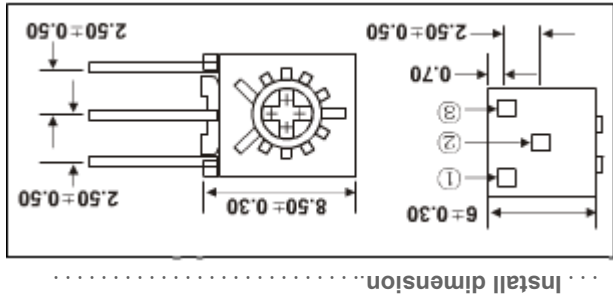

... Install dimension

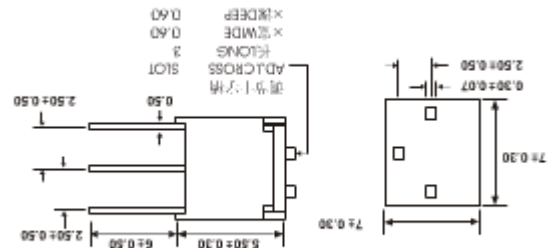


... Mutual dimension


### Standard Resistance Table

Resistance Code	Resistance (Ohms)	Resistance (Ohms)
100	10	100
200	20	200
500	50	500
101	100	101
201	200	201
501	500	501
102	1,000	102
202	2,000	202
502	5,000	502
103	10,000	103
203	20,000	203
503	50,000	503
104	100,000	104
204	200,000	204
504	500,000	504
105	1,000,000	105
205	2,000,000	205

Special resistances available

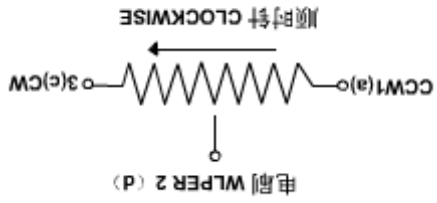

图中公式：除注明外均为±0.25  
Tolerance is ± 0.25 if no identification

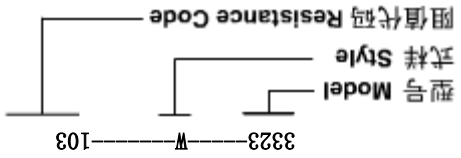

### How To Order

- Collision.....390m/s<sup>2</sup>,4000cycles,ΔR≤5%R
- .....ΔR≤5%R,Δ(Uab/Uac)≤7.5%R
- 500Hz,0.75mm,6h,
- Vibration.....10~
- .....ΔR≤5%R,Δ(Uab/Uac)≤5%
- .....30min cycles
- 55°C,30min,+100°C
- Temperature Variation.....
- Coefficient.....±250ppm/°C
- Temperature
- 100°C
- Temperature Range.....-55°C~
- .....0.25W@70°C,0W@100°C
- Power Rating, 315 volts max

### Environmental Characteristics

- Travel.....250°
- Effective
- Withstand Voltage.....707Vac
- (500Vac)
- Insulation Resistance.....R1≥1GΩ
- 5Ω
- Contact Resistance Variation.....CRV≤3%或
- 10Ω
- Absolute Minimum Resistance.....≤1%R或
- Tolerance.....±10%
- Resistance
- 2MΩ
- Standard Resistance Range.....50Ω~

### Electrical Characteristics