


Comus Group of Companies

PRODUCT DATA SHEET

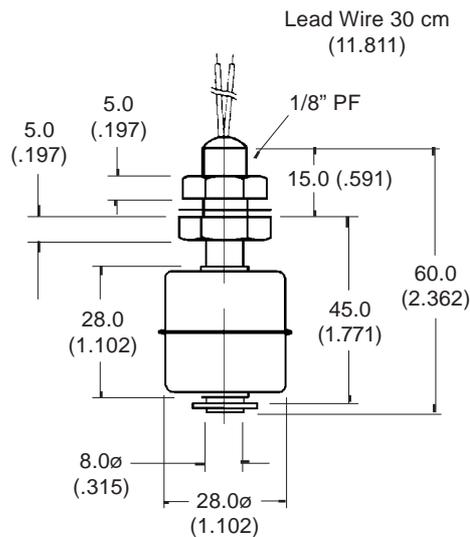

Drawings not to scale
All dimensions in mm (inches) nominal

UL approved

SPECIFICATION

| | | |
|---------------------------|-------------------------|------------------------|
| | | Reversible Float |
| SWITCHING VOLTAGE | Max. V | 240 Vac/200 Vdc |
| SWITCHING CURRENT | Max. A | 0.5 |
| CARRY CURRENT | Max. A | 1.0 |
| SWITCHING CAPACITY | Max. VA | 50 |
| CONTACT RESISTANCE | Max. mΩ | 200 |
| LEAD WIRE | | XLPE (UL3266, AWG22) |
| OPERATING PRESSURE | Max. Kg/cm ² | 10 |
| OPERATING TEMPERATURE | Deg. °C | -10° +120° |
| MATERIAL | | Stainless Steel SUS304 |
| SUITABLE SPECIFIC GRAVITY | | 0.8 |
| WEIGHT | gm. | 35 |
| CLEARANCE HOLE DIA. | mm. | 17 |

FLOAT - Reed Switch - Stainless Steel

PART NUMBER
VFS30

| Rev. No. | Revision Note | Date | Signature |
|----------|---------------|--------|-----------|
| A | Web Site 2003 | 1-7-03 | RG |

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France