

Terminations, Blind Mate

dc – 18 GHz

470X Series


V2.00

Features

- OSSP and OS-50P Blind Mate
- Gold Plate Finish Standard
- Bead Chain Available.


Description

Blind Mate OSSP series connection terminations for use in testing modules with the same series connectors. Ideal for bench and field testing of modules using the OSSP series of blind mate connectors or for termination of unused ports. A floating mount version (similar to 4706-7985-02 panel mount connector) is available for press mounting into a mating panel. Consult factory (ref. 4706-6113-00) for more information.



OSSP Blind Mate Jack

Figure 1

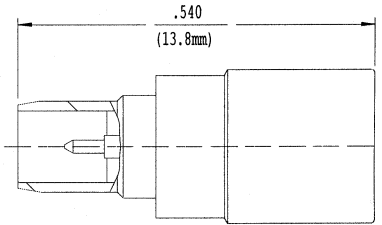

OSSP Blind Mate Plug

Figure 2

Ordering Information and Typical Performance Specifications, dc-18.0 GHz

Part Number Plug	Figure	Part Number Jack	Figure	VSWR dc-4GHz	VSWR 4-12.4GHz	VSWR 12.4-18GHz
4701-6110-00	1	4702-6110-00	2	1.05	1.10	1.20
4701-6111-00	1	4702-6111-00	2	1.05	1.10	1.15
4701-6112-00	1	4702-6112-00	2	1.05	1.15	1.20
4701-6113-00	1	4702-6113-00	2	1.10	1.20	1.30
4701-6115-00	1	4702-6115-00	2	1.10	1.20	1.30

*With Bead Chain Standard. For chains on other parts, contact factory for part numbers.

Power: 0.5 Watts Average.