

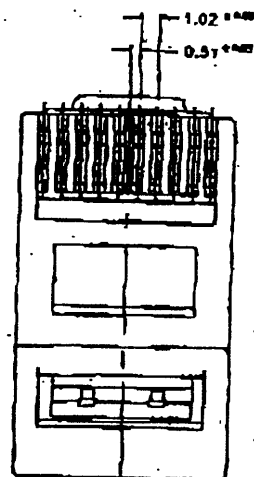
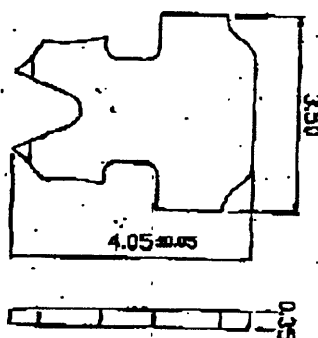
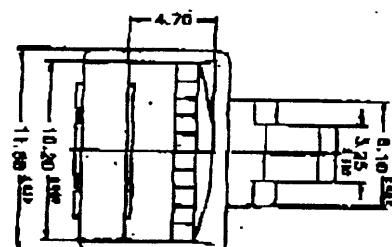




Use dimension lines to indicate the measurement. The technical data being listed are for description purposes only. They do not form any guaranteed characteristics. All descriptions and pictures are subject to technical modifications.
Les caractéristiques techniques servent à la description, elles ne constituent pas des données garanties. Toutes modifications techniques réservées.

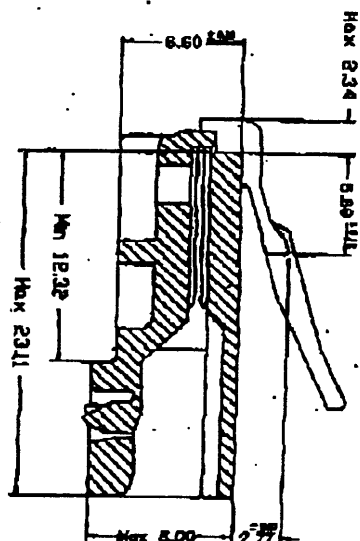



#112: MP10P10C-R



"1": 2 PRONGS FOR STRANDED WIRE
多芯線用二叉型金片

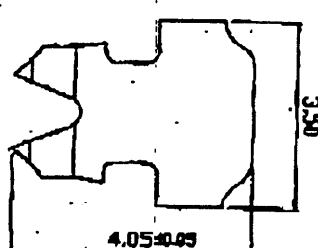

"2": 2 PRONGS FOR SOLID WIRE(S)
單芯線用大插角型金片

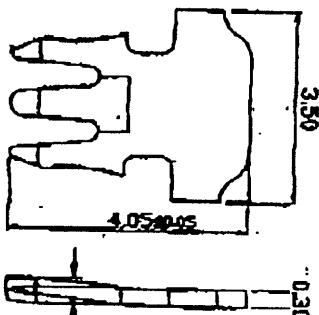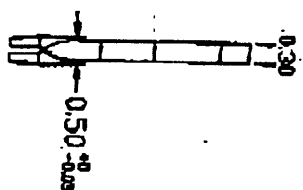

"3": 3 PRONGS FOR SOLID WIRE(S)
單芯線用三叉型金片



☐ Standard Logo: COB

☐ Special Logo:

產品編號 ITEM No.

☐ Blank

#112 B

C

D

E

ITEM No. P-303-10-R-6
CLIENT ITEM No. P-303

鍍金厚度 Gold plating(A,B,C,D,E)

金片型式 Contacts type(blank,2,3)

鍍層材料 Housing Material(O,2)

高級 Logo(COB,other or blank)

UNIT: m/m

94V-2
UL

☐ #112-0A	☐ #112-02A	☐ #112-03A	32"
☐ #112-0B	☐ #112-02B	☐ #112-03B	62"
☐ #112-0C	☐ #112-02C	☐ #112-03C	152"
☐ #112-0D	☐ #112-02D	☐ #112-03D	302"
☐ #112-0E	☐ #112-02E	☐ #112-03E	502"
☐ #112-1A	☐ #112-12A	☐ #112-13A	32"
☐ #112-1B	☐ #112-12B	☐ #112-13B	62"
☐ #112-1C	☐ #112-12C	☐ #112-13C	152"
☐ #112-1D	☐ #112-12D	☐ #112-13D	302"
☐ #112-1E	☐ #112-12E	☐ #112-13E	502"




圖 01