


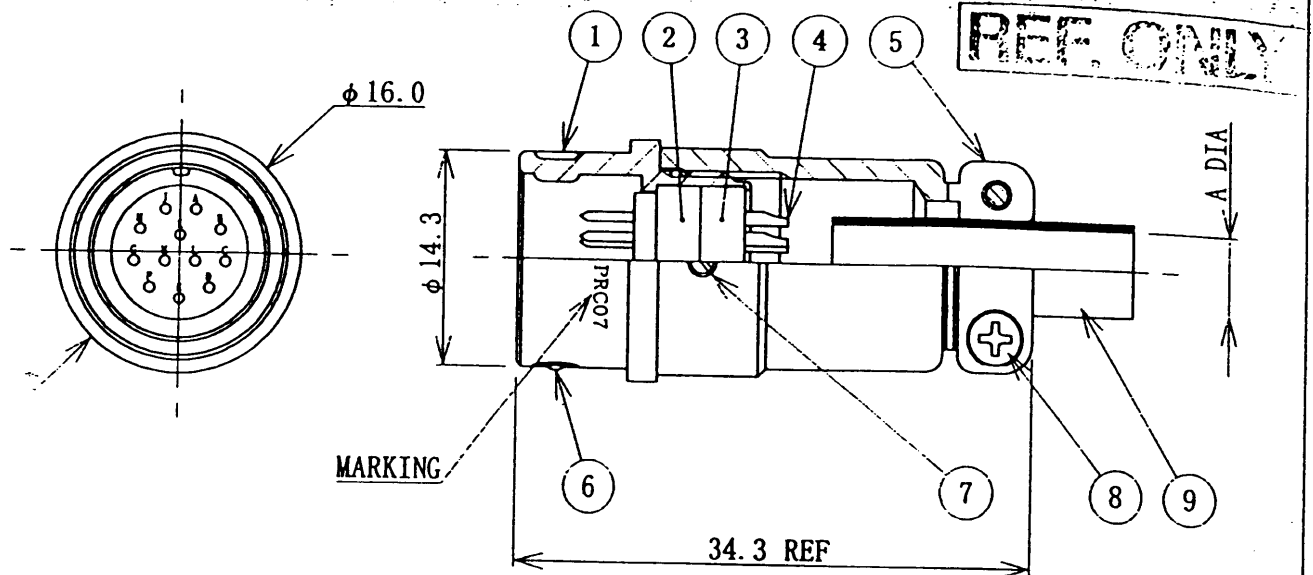

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000MΩ MIN AT 100V D.C.

CONTACT RESISTANCE : 10mΩ MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX


3. SOLDER BUCKET SIZE : 0.5 DIA

4. A DIA : φ6.2 (φ5.2)

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M.W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)



9	SLEEVE	VINYL CHLORIDE	—	1	
8	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
7	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
6	STEEL BALL	STEEL	CHROMIUM PLATED	3	
5	REAR SHELL	BRASS	NICKEL PLATED	1	
4	PIN CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL PLATED	1 2	
3	REAR INSULATOR	PBT RESIN	—	1	
2	FRONT INSULATOR	PBT RESIN	—	1	
1	INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数 量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION		尺 度 SCALE 2 / 1		T.M.W. TAJIMI ELECTRONICS CO., LTD.			
		単位 UNITS mm		製図 DRAWN S. SATO		DATE 11 JAN 1999		PRC07-J12M PRC07-1008	
		交差 TOLERANCES ON ANGLE . X . XX		設計 ENGR T. Waki		DATE 11 JAN 1999			
		止線番号 SPEC No		検閲 CHK T. Waki		DATE 11 JAN 1999			
				承認 APPD K. Yagi		DATE 11 JAN 1999		SHEET	

 変更REV
1