

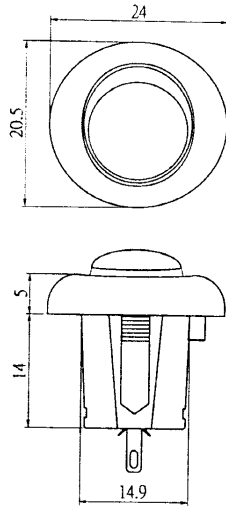


R13-234

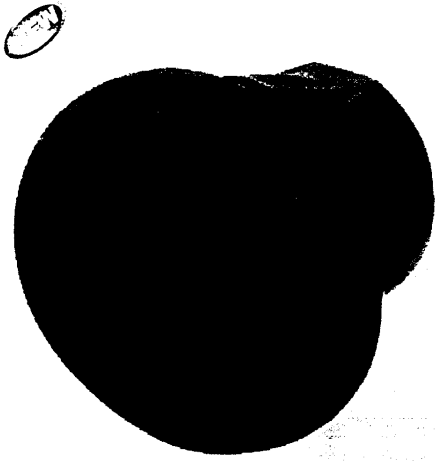

Rating

6A 125V AC
3A 250V AC

Contact resistance

50mΩ Max


Insulation resistance

DC 500V 100MΩ Min

Dielectric strength

AC 1500V 1 minute

Cut-out






±0.05 0.75~3 mm

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Nylon with fiber glass base.
- * Snap-in mounting, easy to install switch into panel.

R13-234

FUNCTION	TERMINAL
----------	----------



() = momentary