



DENMARK

DIMENSIONS IN MM

525 546

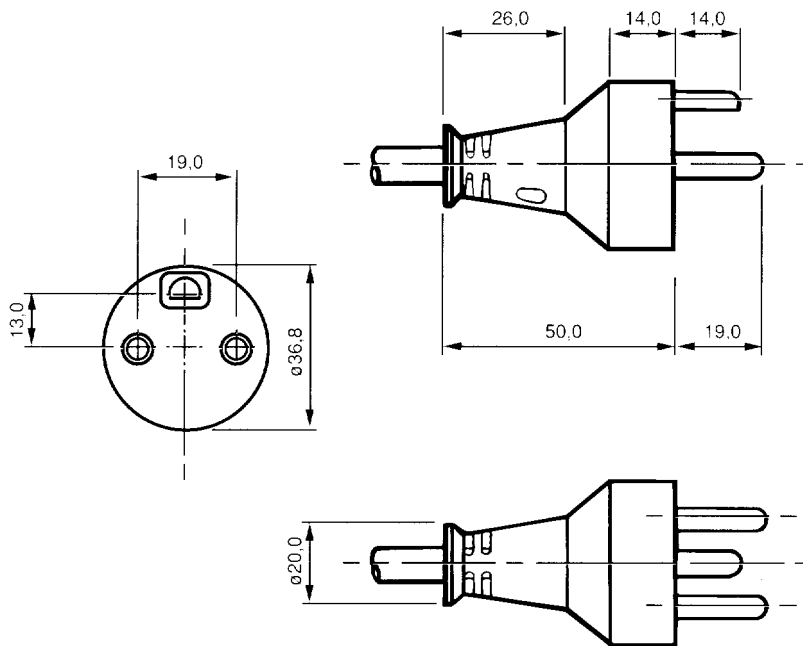

**10 AMP 250V
3 PIN PLUG
TYPE No. DD10A**

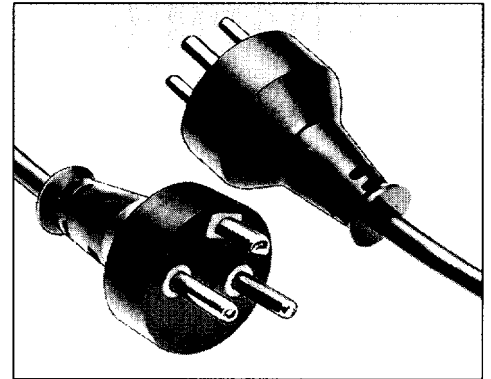

PRODUCT SPECIFICATION

Specification	SRAF 1962
Operating Voltage	250V. a.c.
Current Rating	10 Amp
Insulation Resistance	>10 M ohms
Cable Retention	>60N
Outside Body	P.V.C.
Terminals	Brass-Nickel Plated
Flexible Cords	See Appendix
Approvals	See Appendix

TEST SPECIFICATION

Each plug is 100% tested to the following:



Earth Continuity	25A
Polarity	
Insulation Resistance L-N	500V. d.c.
Electrical Strength L-N	2.4kV. 50Hz
Insulation Resistance L-N-E	500V. d.c.
Electrical Strength L-N-E	2.4kV. 50Hz
Safety Test	4.4kV. 50Hz.

10 AMP 250V 3 PIN PLUG

Designed to suit the electrical socket in use in Denmark the Pencon moulded plug complies with the requirements of Danish Standard SRAF 1962.

The design features an inner insulating cover and all wire connections are crimped for greater safety and reliability.

Each plug undergoes seven electrical tests to ensure correct continuity, polarity and electrical safety.

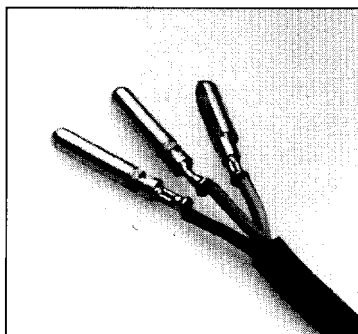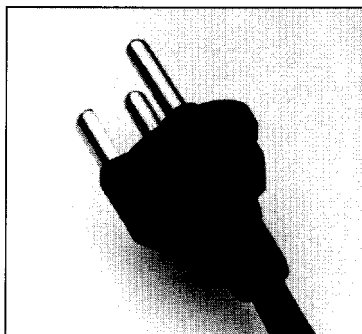

The Manufacturers reserve the right to alter specifications without notice.

PENCON

A division of the Volex Group p.l.c.